

*Your
Quality Time.*


EURA MOBIL



2025/2026 season

Motorhomes 2025/2026

Equipment and technical specifications

www.euramobil.de

Important information regarding vehicle weights

Since each vehicle in drive mode is only permitted to exhibit an overall weight defined by the manufacturer, weight-related specifications are particularly important when purchasing a motor home or van. This is especially true when choosing packages and special equipment that is installed at the factory. It must be kept in mind that the overall weight permitted in road traffic may never be exceeded while driving. The information below is therefore intended to make configuring your vehicle easier and explain the legal requirements relating to vehicle weights. Please read this information through carefully before starting your vehicle configuration process and contact your dealer if you have any questions.

1. The technically permissible overall weight

The technically permissible overall weight in a laden state can be found in the technical data for our motor homes and vans, as well as in the configurator. This figure represents the overall weight defined by the manufacturer that the vehicle must not exceed while driving. Otherwise, in many European countries, including Germany, fines may be issued. Since you as the driver of the vehicle are responsible for complying with the technically permissible overall weight, we recommend that you check your vehicle before every journey and weigh your vehicle before setting off.

2. Weight in ready-to-drive state

The weight in ready-to-drive state refers to the weight of the vehicle (with standard features according to the manufacturer's specifications) with its fuel tank filled to at least 90% of capacity and includes the weight of the driver (which is calculated at a nominal value of 75 kg), the weight of the fuel and fluids, the weight of the superstructure and the driver's cab, and the weight of the towing hitch and the tyre repair kit (to the extent these are present).

Information regarding the weight in the ready-to-drive state can also be found in the technical data for our motor homes and vans, as well as in our configurator.

It is important to note that the weight in ready-to-drive state is a value calculated in the type approval procedure, which is subject to legally permissible fluctuations of up to +/- 5%.

Since these fluctuations impact the remaining payload of the individual vehicle, the occurrence of legally permissible fluctuations must be factored in during the configuration and selection of packages and special equipment.

Example: In the technical data, the weight in the ready-to-drive state for the floor plan you have chosen is stated as 2,910 kg. This calculated value is subject to legally permissible fluctuations of +/- 5%, i.e. +/- 146 kg. The weight in ready-to-drive state of the individual vehicle can therefore range from 2,764 kg to 3,056 kg.

We also list the legally permissible fluctuations in the technical data for our motor homes and vans, as well as in our configurator as an additional text in brackets.

3. The weight of the passengers

The weight of the passengers is calculated from the number of belt-restrained seats defined by the manufacturer and is set at a nominal 75 kg per seat, whereas the weight of the driver, which was already taken into account in the weight in the ready-to-drive state, must be deducted. In the case of a vehicle with four belt-restrained seats, the weight of the passengers is therefore 225 kg (3 x 75 kg). The number of belt-restrained seats can be found in the technical data for our motor homes and vans, as well as in our configurator. Please note that these numbers represent the highest possible number of belt-restrained seats for the series-version floor plan in question. The number of belt-restrained seats can however be reduced by the selection of packages and special equipment, or make an increase in the vehicle's load capacity necessary.

4. The actual weight of the vehicle / packages and special equipment

The actual weight of the vehicle refers to the weight of the vehicle in the ready-to-drive state plus the packages or special equipment installed at the factory and is listed under point 13.2 of the certificate of conformity (CoC). This figure does not include the special equipment or other accessories that are added by a retailer or by you personally after delivery of the vehicle from the factory.

It should be noted that the actual weight of the vehicle is also a calculated value, which may deviate from a value determined for your individual vehicle due to legally permissible fluctuations in the weight in ready-to-drive state as a calculated value of the actual vehicle weight.

Information regarding the weights of the packages and special equipment available ex works for our motor homes and vans can be found in our configurator.



5. Payload and minimum payload

The payload is the maximum load that a vehicle can carry and is calculated by subtracting the weight in ready-to-drive state, the weight of the passengers and the weight of the packages and special equipment fitted ex works from the technically permissible overall weight.

Example:

Technically permissible overall weight	3,500 kg
Weight in ready-to-drive state	- 2,910 kg
Weight of passengers	- 225 kg (3 x 75 kg)
Weight of packages / special equipment	- 100 kg
Payload	=
265 kg	

The installation of packages and special equipment will accordingly always lead to a reduction in the payload. The maximum weights available for packages and special equipment for each floor plan are shown separately in the technical data for our motor homes and vans and in our configurator.

For motor homes and vans as Class M1 vehicles, compliance with a minimum payload, i.e. the minimum load that a vehicle can transport, is required by law. This minimum payload must not be undercut either when configuring a vehicle or during production and is calculated for our motor homes and vans according to the following formula:

$$\text{Minimum payload in kg} \geq 10 \cdot (n + L)$$

Where: "n" is the maximum number of belt-restrained seats, plus the vehicle driver, and "L" is the total length of the vehicle in metres.

Example: In the case of a motor home with 4 belt-restrained seats and a length of 7 m, the minimum payload is 110 kg ($10 \times [4+7]$).

It is important to note that legally permissible fluctuations in the weight in ready-to-drive state can increase the payload of the individual vehicle, but can also reduce it.

Example (as previously):

Technically permissible overall weight	3,500 kg
Weight in ready-to-drive state (+ 4%)	- 3,026.4 kg
Weight of passengers	- 225 kg (3 x 75 kg)
Weight of packages / special equipment	- 100 kg
Payload	=
148.6 kg	

In order to prevent such fluctuations from leading to a shortfall in the legally prescribed minimum payload, we have limited the maximum weight for packages and special equipment on the manufacturer's side based on the legally permissible fluctuations. Information regarding this can be found in the technical data for our motor homes and vans, as well as in our configurator. This data also takes into account special equipment features of country variations / special models that do not form part of the series equipment.

If the configuration process for our motor homes and vans leads to the upper limit for this as defined by the manufacturer being exceeded as a result of the choice of packages and special equipment, you can only continue with the configuration process if you de-select packages, special equipment or belt-restrained seats or choose to increase the vehicle's load capacity. Otherwise, you will not be able to configure or ordering the configured vehicle.

In exceptional cases, despite a restriction of the weights for packages and special equipment, weighing at the end of the production line can reveal that the individual vehicle's minimum payload is undercut due to legally permissible fluctuations. In such cases, we will not ship the vehicle in question before compliance with the minimum payload is ensured through the removal of packages, special equipment or belt-restrained seats or the vehicle's load capacity is increased.

Vans



Feature highlights

- Sophisticated atmosphere with high-gloss furniture
- Interior with textile wall and ceiling covering
- Kitchen and bathroom with mineral surfaces
- Bath with swivel shower wall
- Furniture with ambient lighting
- Panoramic skylight roof hood
- Efficient insulation for all-year-round use
- Floor plans available with transverse, single and lift-up bed

Vans – Feature packages (optional)

Mondial package

Optional for: VANS

Electric parking brake
Keyless Entry & Go
Traction Plus incl. hill descent control
Steering wheel controls
Bumpers painted in the vehicle colour
16" aluminium rims
Leather steering wheel and gearshift knob
Pioneer radio
Rear-view camera
Roof - panoramic roof "Skyroof"
Manual dimming system for driver's cab
Door mosquito screen
Midi-Heki skylight
Pre-cabling for solar power system
Dashboard with chrome-plated air vents
Captain's chairs
Fog lights incl. cornering light
Radio preparation incl. DAB
Black skid plate

Mondial Plus package*

Optional for: VANS

Automatic air conditioning
Inductive charging station
100 Ah lithium battery (1x)
Solar power system (200 Watt)
7" digital instrument panel

Driving Assistance package

Optional for: VANS

Safety package
Full LED headlights
Adaptive cruise control 30km/h+intelligent speed assistant

Driving Assistance Plus package**

Optional for: VANS

Active lane departure assistant
Electrically folding mirrors
Parking assistance
Blind spot assistant with rear lateral movement detection
2PP+adaptive cruise control 30km/h+intelligent speed assistant with start-stop technology
Traffic sign assistant

Pop-up edition

Optional for: VANS

Adjustable roof
Mondial package
Mondial Plus package
Driving Assistance package
Driving Assistance Plus package
Body 40 H
Automatic transmission
"Lanzarote Grey" paintwork
Canopy

* Only in combination with Mondial

** Only in combination with Mondial Plus and Driving Assistance package

Vans – Technical specifications



	V 595 HB	V 635 EB	V 635 HB
Base vehicle	Fiat Ducato 35L // 35H 103 kW (140 HP)	Fiat Ducato 35L // 35H 103 kW (140 HP)	Fiat Ducato 35L // 35H 103 kW (140 HP)
Fuel tank	90 L diesel + 19 L Ad Blue	90 L diesel + 19 L Ad Blue	90 L diesel + 19 L Ad Blue
Technically permissible overall weight* ¹⁾	3,500 kg	3,500 kg	3,500 kg
Weight in ready-to-drive state ²⁾	2,926 (2,780 – 3,072)	3,036 (2,884 – 3,188)	3,036 (2,884 – 3,188)
Maximum weights for packages and special equipment ⁴⁾	229	129	129
Permissible gross train weight with 140, 180 HP	6,000 // 6,500 kg*	6,000 // 6,500 kg*	6,000 // 6,500 kg*
Permissible trailer load (braked)** with 140, 180 HP	2,500 // 3,000 kg*	2,500 // 3,000 kg*	2,500 // 3,000 kg*
Dimensions			
Total length	5,990 mm	6,360 mm	6,360 mm
Total width	2,050 mm	2,050 mm	2,050 mm
Overall height	2,650 mm	2,650 mm	2,650 mm
Interior width	1,940 mm	1,940 mm	1,940 mm
Standing height	1,890 mm	1,890 mm	1,890 mm
Wheelbase	4,035 mm	4,035 mm	4,035 mm
Standard tyres	215/70 R15 // 225/75 R16C*	215/70 R15 // 225/75 R16C*	215/70 R15 // 225/75 R16C*
Rear bed (adjustable)	1,860 x 1,490 mm	1,950 x 800 / 1,860 x 800 mm	1,850 (1,750) x 1,580 mm***
Bed in adjustable roof (optional)	1,880 x 1,200 mm	1,880 x 1,200 mm	1,880 x 1,200 mm
Number of sleeping areas	2 (4)	2 (4)	2 (4)
Permitted number of people with 3-point belt ³⁾	4	4	4
Installation			
Fresh water tank size ⁵⁾	85 l	85 l	85 l
Fresh water tank in the drive position ⁵⁾	20 l	20 l	20 l
Waste water capacity	75 l	75 l	75 l
Gas box	2 x 7 kg	2 x 7 kg	2 x 7 kg
Battery capacity	80 Ah	80 Ah	80 Ah
Charger	17 A	17 A	17 A
Refrigerator	84 l	84 l	84 l

* With 35H chassis (optional) ** The permissible gross train weight must be complied with *** In the lower position, the reclining area can be extended to 1850 / 1750 x 1880 mm

¹⁾Technically permissible overall weight (kg) The technically permissible overall weight in a laden state refers to the overall weight defined by the manufacturer that the vehicle may not exceed when in drive mode.

²⁾The weight in the ready-to-drive state (kg) The weight in the ready-to-drive state refers to the weight of the vehicle (with standard features according to the manufacturer's specifications) with its fuel tank filled to at least 90% of capacity and includes the weight of the driver (which is calculated at a nominal value of 75 kg), the weight of the fuel and fluids, the weight of the superstructure and the driver's cab, and the weight of the towing hitch and the tyre repair kit (to the extent these are present). This represents a calculated value that is subject to legally permissible fluctuations of up to ± 5% (see additional text in brackets). Since these legally permissible fluctuations impact the vehicle's payload and therefore also the weights of the packages and special equipment that can be ordered, the occurrence of such fluctuations must be factored into the configuration process and the choice of packages and special equipment.

³⁾Permitted number of people with 3-point belts The weight of the passengers is calculated at a nominal 75 kg per seat, whereas the weight of the driver, which was already taken into account in the weight in the ready-to-drive state, must be deducted. In the case of a vehicle with four belt-restrained seats, the weight of the passengers is therefore 225 kg (3 x 75 kg).

⁴⁾Maximum weights for packages and special equipment The maximum weights for packages and special equipment represent a value calculated for each floor plan with which we have restricted the weights for the packages and special equipment that can be ordered from the factory. This is intended to ensure that the legally prescribed minimum payload is complied with after the vehicle is shipped from the factory. If the configuration process leads to the upper limit for this defined by the manufacturer being exceeded as a result of the choice of packages and special equipment, you can only continue with the configuration process if you de-select packages, special equipment or belt-restrained seats or choose to increase the vehicle's load capacity. Otherwise, you will not be able to continue the configuration or order the configured vehicle. Please note that the calculation of the maximum weights for packages and special equipment also takes into account the special equipment features of the selected country variation / the selected special model.

⁵⁾Fresh water tank size (l) Please note that the capacity of the fresh water tank is significantly reduced in the drive position. If the payload of the individual vehicle is sufficient, it can be filled to its full capacity.

Find a Eura Mobil
dealer near you here!

Vans – Standard features

	VANS
BASE VEHICLE	
Fiat Ducato 35L chassis, van	S
Euro 6E, AE Final incl. Ad Blue and soot particle filter	S
Driver + passenger airbag	S
ABS, ASR, Esp	S
Manual air-conditioning system	S
Cruise control	S
Fuel tank, 90 litre	S
Central locking with radio remote control	S
Daytime running lights	S
Electric window risers at the front	S
Decorative wheel trims	S
Fix & Go breakdown kit	S
Rear bumper black	S
SUPERSTRUCTURE EXTERIOR	
Sound and heat insulating roof, floor and sides	S
Body colour white	S
Body-flush frame windows, insulated, with quick-release fasteners	S
Windows with mosquito screens and blackout (also in the rear doors)	S
Two side windows in the sleeping area (595HB: 1)	S
Vent windows at the rear	S
External lighting	S
Electric step	S
DRIVER'S CAB	
Cab seat cover in living area upholstery fabric	S
Carpet in the driver's cab	S
Seamless, head-high passage to the driver's cab	S
2 map compartments above the doors	S
2 double reading lights	S
Eco-leather trim with integrated LED ambient lights in the transition to the superstructure	S
LIVING AREA	
Ergonomically shaped dinette with rounded edges	S
Folding table with swivel extension and chrome-plated table base	S
Table top with cup holder	S
Living area upholstery in eco-leather / fabric combination with decorative stitching	S
Double floor storage compartments under seating group (1 pull-out, 1 folding compartment, 1 floor storage compartment)	S
Wall units, rear ventilation, with shelves	S
"Beach Home" furniture décor	S
Wardrobe with pull-out clothes rail	S
Smooth Touch fleece covering on the ceiling	S
Textile wall covering on the side walls	S
Window frame and skylight trims in eco-leather	S
Robust metal flap stand	S
Chrome-plated cabinet locks with handle button	S
LED functional and ambient lighting	S
USB ports and TV preparation at the seating group	S
KITCHEN	
Single-piece mineral worktop with integrated sink and foldable worktop extension	S
Pull-out / retractable kitchen tap	S
Wide pull-outs with soft-close function	S
Two-burner gas cooker with cover	S
Gas shut-off taps centrally located in the kitchen unit	S

	VANS
Compressor refrigerator with 84-litre volume	S
Spice rack with acrylic glass rail and indirect lighting	S
Ambient lighting on the kitchen unit and wall unit	S
2 flap compartments in the entrance area, 1 with bottle holder	S
1 pull-out in the kitchen unit accessible from the outside	S
Table rail for suspending the dinette table, with folding cover panel	S
BATHROOM	
Washroom with swivelling easy-to-open shower screen	S
Shower space with up to 60x90cm floor space	S
Wooden shower grate	S
Large mineral washbasin with Click-Clack anti-odour trap	S
Storage compartments in the wall unit, shower wall and wall panelling	S
Mirror cabinet	S
Hinged, 3-cm thick room door	S
Door handle with exclusive imitation leather covering	S
Cassette toilet	S
Washroom window with mosquito screen and blackout	S
SLEEPING AREA	
Rear beds with disc springs (V 595 HB) or slatted frame and cold foam comfort mattresses	S
Rear beds can be set up for variable loading area	S
On Model 635 EB modular storage boxes under the beds	S
On Model 635 HB drive-on ramp and load compartment cover made of metal	S
Overhead storage cupboards with shelves, back-ventilated and illuminated	S
Fabric-covered corner connector modules with integrated loudspeakers on the rear cabinets	S
Midi Heki roof hatch above sleeping area	S
2 side windows with backlit window frame and skylight trims in imitation leather (595HB: 1)	S
Swivelling LED reading spotlights with USB ports	S
Rear doors with fabric covering and opening windows	S
INSTALLATION	
4KW diesel heating	S
Hot water supply with single-lever mixer tap	S
Pressurised water pump	S
Frost-proof fresh water tank in interior	S
Heated waste water tank underfloor	S
Water drainage taps frost-proof in interior floor compartment	S
Gas box in rear storage compartment	S
External shower (not possible for V 595 HB)	S
ELECTRICAL SUPPLY	
230V sockets in kitchen, seating group and bathroom	S
Function light and ambient lighting can be switched separately	S
TV preparation and 12V socket in seating group	S
2 USB ports each in living area and sleeping area	S
Disconnecter for starter and living area battery	S
Electric automatic charger for body / vehicle battery	S
CEE external connection for 230 V with automatic circuit breaker	S
Ground fault circuit interrupter	S
On-board control panel with indication of important functions above entrance	S
CP+ heating control incl. crash sensor	S

S = Standard **P** = Package content
O = Optional **–** = Not possible

Vans – Special equipment

S = Standard **P** = Package content
O = Optional **-** = Not possible

		V 595 HB	V 635 EB	V 635 HB	Weight difference in kg	"RRP price (€) incl. 19% VAT"
COMFORT PACKAGES						
EVPSM01-26	Mondial package – Eura Van 35L	O	O	O	35	4,990
EVPSM02-26	Mondial package – Eura Van 35H automatic transmission	O	O	O	35	4,990
EVPSM03-26	Mondial Plus package – Eura Van	O	O	O	2	2,590
EVPU01-26	EV595HB 40H pop-up edition	O	-	-	230	24,990
EVPU02-26	EV635 40H pop-up edition	-	O	O	227	24,990
EVPU03-26	EV635 35L pop-up edition	-	O	O	175	22,990
EVPU04-26	EV595 35L pop-up edition	O	-	-	175	22,990
EV2827-26	Eura Mobil Van Driving Assistance package	O	O	O	0	2,790
EV2828-26	Eura Mobil Van Driving Assistance Plus package	O	O	O	0	2,490
CHASSIS OPTION – ENGINE						
EV2118-26	180 HP Fiat engine (surcharge compared to 140 HP)	O	O	O	15	3,510
CHASSIS OPTION – OTHER OPTIONS						
EV2315-26	Body 35 H	O	O	O	40	690
EV2316-26	Body 40 H	O	O	O	40	990
EV2133-26	Fiat automatic transmission in combination with a light chassis	O	O	O	60	3,690
EV2136-26	Fiat automatic transmission in combination with a Maxi chassis	O	O	O	20	3,690
EV3228-26	Pioneer DAB radio	O	O	O	1	1,190
EV3229-26	Rear-view camera	O	O	O	1	590
EV2220-26	16" aluminium rims	O	O	O	6	1090
EV2221-26	16" aluminium rims	O	O	O	6	1,090
EV2372-26	Fuel tank, 60 litre	O	O	O		
EV2410-26	Fiat White paintwork	S	S	S	0	0
EV2411-26	Fiat Iron Grey paintwork	O	O	O	0	1020
EV2412-26	Fiat Black paintwork	O	O	O	0	1,020
EV2414-26	Artense Grey paintwork	O	O	O	0	1,020
EV2415-26	Expedition Grey paintwork	O	O	O	0	1,020
EV2416-26	Lanzarote Grey paintwork	O	O	O	0	1,020
SUPERSTRUCTURE OPTION – CANOPIES						
EV5240-26	3.7 m mechanical canopy	O	-	-	27	1,670
EV5241-26	4 m canopy	-	O	O	29	1,670
SUPERSTRUCTURE OPTION – INTERIOR						
EV7250-26	138 l refrigerator	O	O	O	0	290
EV3680-26	Manual blackout system	O	O	O	8	790
EV5221-26	Roof– panoramic roof/Skyroof	O	O	O	13	1,680
EV5320-26	Black pop-up roof with Skyroof	O	O	O	120	7,890
EV5531-26	Midi-Heki skylight	O	O	O	6	590
EV5570-26	Mosquito screen for the body door	O	O	O	6	690
EV6220-26	Additional bed (conversion of seating group) for one person	O	O	O	8	530
SUPERSTRUCTURE OPTION – SUPPLY TECHNOLOGY						
EV7222-26	Combi D 6 E heating	O	O	O	2	790
EV5231-26	Pre-cabling for solar power system	O	O	O	0	350
EV5232-26	Solar power system (200 Watt)	O	O	O	15	990
EV7320-26	100 Ah lithium battery (1x)	O	O	O	-13	3,300
SUPERSTRUCTURE OPTION – TEXTILE FEATURES						
EV6110-26	"Como" upholstery fabric	S	S	S	0	0
MISCELLANEOUS						
EV9525-26	3 year extended warranty < 4.5t	O	O	O	0	
EV9810-26	Seat reduction by 1 person	O	O	O	0	
9009	Gas safety certificate, COC document or vehicle paperwork, TÜV approval and pre-carriage (mandatory)	O	O	O	0	
A 801	Transfer costs (mandatory)	O	O	O	0	



Activa One

Feature highlights

- GRP bodywork uses bonding technology from aviation
- Floor-wall bonding technique using PU and aluminium profiles
- Up to 2,000 kg trailer load
- Continuous double floor without steps in the living area
- Rot-protected GRP chassis
- Wood-free walls with continuous insulation
- Robust furniture with aluminium profile reinforcements (3-year guarantee)
- Bonded and all-round-sealed body composite made of hail-protected glass-fibre reinforced plastic (GRP) featuring Eura Mobil Sealed Structure Technology
- 10-year leak guarantee (up to 150,000 km)
- Underfloor heating effect in the floor you walk on
- Insulated and heated coachbuilds
- "Cellar storage space" for travel equipment in the double floor
- Robust aluminium skirts
- Hail-protected walls and roof
- 37-cm high, continuous storage space in the double floor
- Winter-proof according to EN 1646
- Isofix child seat attachment (except 570 HS and 650 HS)
- Water tanks protected in insulated and heated double floor
- 79-cm high, heated coachbuilt with folding floor
- Storage space in the double floor can be individually divided up at the dealership
- Electric access step
- Body door with window
- Bright and modern "Beach Home" interior with beach feeling

Activa One – Floor plans

**A ONE 570 HS**

Total length:	5.99 m
Total width:	2.32 m
Weight class:	3.5 t
Number of seats:	4
Sleeping areas:	4

- + Compact length combined with spacious, bright rear seating group
- + Large storage area under the rear seating group
- + Exclusively from Eura Mobil: Belt anchorage of the seating group with aluminium profiles in the side wall
- + No storage space restriction due to belt frame
- + Combination washroom with swivel washbasin and integrated shower
- + Great spatial effect due to unobstructed, open view
- + Longitudinal kitchen with 142-litre refrigerator in single arrangement

**A ONE 630 LS**

Total length:	6.44 m
Total width:	2.32 m
Weight class:	3.5 t
Seats:	4 (6) (optional)
Sleeping areas:	5

- + Lots of space with a short length
- + Spacious side bench seat, 1.90 m
- + Bathroom with separate shower in the rear
- + Plenty of freedom of movement in the kitchen
- + Large storage area under the longitudinal bench
- + Large seating group for up to 7 people

**A ONE 650 HS**

Total length:	6.50 m
Total width:	2.32 m
Weight class:	3.5 t
Number of seats:	4
Sleeping areas:	4

- + Exclusively from Eura Mobil: Single bed comfort in the coachbuilt at a manageable length of 6.50 m
- + Sliding door to the driver's cab
- + Single beds can be converted into double bed
- + Two large wardrobes under single beds
- + Spacious, bright rear seating area
- + Combination washroom with swivel washbasin and integrated shower
- + Kitchen with 142-litre refrigerator in single arrangement
- + Retractable TV pull-out at the seating group (optional)

Activa One – Feature packages

Travel package**Optional for: ACTIVA ONE**

Electric parking brake	Moniceiver with rear-view camera
Captain's chair seats	Ambient lighting
Traction Plus incl. hill descent control	Heki skylight roof hood
Steering wheel controls	Manual dimming system for driver's cab
Bumpers painted in the vehicle colour	Door mosquito screen
Fog lights incl. cornering light	Pre-cabling for solar power system
Black skid plate	Service flap: garage door in addition (left) depending on floor plan
16" aluminium rims	Radio preparation incl. DAB+
Leather steering wheel and gearshift knob	
Dashboard with techno trim design	

Fiat Driving Assistance package**Optional for: ACTIVA ONE**

Safety package (emergency braking and lane departure assistant, rain and light sensor, traffic sign recognition, automatic beam dipping, fog light with cornering light)
Full LED headlights
Adaptive cruise control 30km/h+intelligent speed assistant

Travel Plus package (only in combination with Travel package)**Optional for: ACTIVA ONE**

Automatic air conditioning	External shower (cold/warm)
Inductive charging station	External gas socket on passenger side
7" digital instrument panel	Insulated curtain
Naviceiver w. rear-view camera	Combi 6 E heating (surcharge compared to Combi 4 / Combi 6)
Carpet in the driver's cab	Lithium battery
Multi-function exterior socket	

Activa One – Standard features

S = Standard **P** = Package content
O = Optional **–** = Not possible

	ACTIVA ONE		ACTIVA ONE
CHASSIS		LIVING AREA	
140 HP engine, Euro 6E, AE Final	S	Two-tone furniture décor in wild oak and beach white	S
CCS wide track low-slung frame (1,980 mm gauge)	S	Curtain to the driver's cab (depending on floor plan)	S
Cruise control	S	Wall units with aluminium profile reinforcement	S
Manual air conditioning	S	Noise insulation for wall unit doors	S
ABS + ASR	S	Flooring with footstep sound absorption	S
Driver / passenger airbag	S	Upholstered fabrics: Dara	S
Fix & Go breakdown kit	S		
Daytime running lights	S	KITCHEN	
ESP including Traction+ and hill descent control	S	Refrigerator, 140 litres (AO630LS: 106L)	S
16" wheels	S	3-ring hob with electric ignition, glass cover and large work surface	S
SUPERSTRUCTURE		Drawers with metal roller runners	S
Superstructure winter-proof according to EN 1646	S	Deep wall units; divided, with slide guard	S
Bodywork fully protected from hail with walls and roof made from GRP	S	Water tap with swivel non-drip outlet	S
Double floor throughout, insulated and heated	S	WASHROOM	
Storage space in the double floor GRP-coated (floor and walls)	S	Plenty of space to move around thanks to ergonomically optimised room division	S
Floor panel made from GRP and additional aluminium profile reinforcement	S	Central washroom with integrated shower cubicle (570 HS, 650 HS)	S
Wood-free GRP walls, insulated throughout	S	Separate shower on AONE 630LS	S
Floor-wall joint without cold bridges	S	Storage closet and mirror	S
Roof edge profile made from painted aluminium with joint sealing	S	Cassette WC with large roller-mounted tank	S
Coachbuilt edge profile made from GRP with joint sealing	S	WATER INSTALLATION	
Sturdy chassis side skirts made from powder-painted aluminium	S	Fresh water system made from Hartflex plastic	S
Heated and insulated coachbuilt	S	143-litre fresh water tank insulated and heated inside* (150 litres on 570 and 650 HS)	S
2 windows in the coachbuilt	S	2 quick-acting drain valves for fresh water in the heated and insulated double floor	S
Fold-out coachbuilt floor	S	150-litre waste water tank insulated and heated in the double floor	S
Safety mesh in the coachbuilt	S	Fittings with ceramic cartridges	S
Wall thickness of walls/roof/floor: 30/30/38mm	S	Siphons to prevent odours	S
Extra-large garages thanks to 37-cm high double floor	S	ELECTRICAL INSTALLATION	
Electric access step	S	Electrical distributor panel easily accessible under the passenger seat	S
Trumatic Combi 4 heating	S	80 Ah gel battery	S
Seitz insulated window with mosquito screen & blackout flush with the external wall	S	On-board control panel with separate displays for water, battery and charging voltage	S
Service flaps with double seal, insulated inlay and self-closing locks	S	LED reading spotlights with real glass	S
Single-key system for the entire superstructure	S	Light switch system with household logic system	S
Body door with window and waste bin	S	Ceiling lights	S
Large tail lights in a modern design	S	Number of 230 V power sockets: 2	S
Mini Heki skylight over rear section	S	Number of 12 V power sockets: 1	S
Mini Heki skylight over front section	S	21 A charger	S
Isofix, 2 x in the direction of travel (except AO 650 HS and AO 570 HS) in the seating group	S	USB ports: 1	S
LED tail lights	S	Exterior lighting over body door	S

¹Technically permissible overall weight (kg) The technically permissible overall weight in a laden state refers to the overall weight defined by the manufacturer that the vehicle may not exceed when in drive mode.

²The weight in the ready-to-drive state (kg) The weight in the ready-to-drive state refers to the weight of the vehicle (with standard features according to the manufacturer's specifications) with its fuel tank filled to at least 90% of capacity and includes the weight of the driver (which is calculated at a nominal value of 75 kg), the weight of the fuel and fluids, the weight of the superstructure and the driver's cab, and the weight of the towing hitch and the tyre repair kit (to the extent these are present). This represents a calculated value that is subject to legally permissible fluctuations of up to ± 5% (see additional text in brackets). Since these legally permissible fluctuations impact the vehicle's payload and therefore also the weights of the packages and special equipment that can be ordered, the occurrence of such fluctuations must be factored into the configuration process and the choice of packages and special equipment.

³Permitted number of people with 3-point belts The weight of the passengers is calculated at a nominal 75 kg per seat, whereas the weight of the driver, which was already taken into account in the weight in the ready-to-drive state, must be deducted. In the case of a vehicle with four belt-restrained seats, the weight of the passengers is therefore 225 kg (3 x 75 kg).

⁴Maximum weights for packages and special equipment The maximum weights for packages and special equipment represent a value calculated for each floor plan with which we have

Activa One – Technical specifications



		A ONE 570 HS	A ONE 630 LS	A ONE 650 HS
Base vehicle		Fiat Ducato 16" / 3.5 t	Fiat Ducato 16" / 3.5 t	Fiat Ducato 16" / 3.5 t
Engine model, Euro 6E, AE		103 kW (140 HP)	103 kW (140 HP)	103 kW (140 HP)
Chassis		Fiat CCS low-slung frame	Fiat CCS low-slung frame	Fiat CCS low-slung frame
Fuel tank	l	60 L diesel + 19 L Ad Blue	60 L diesel + 19 L Ad Blue	60 L diesel + 19 L Ad Blue
Dimensions and weights				
Double floor height	cm	37	37	37
Load volume in the double floor (double floor + rear storage space)	l	1,700	1,500	1,700
Size of storage door at the rear	cm	65 x 55	85 x 41	85 x 105
Wheelbase	m	3.45	3.45	3.80
Tyres		225/75R16C	225/75R16C	225/75R16C
Technically permissible overall weight ¹⁾	kg	3,500	3,500	3,500 // 4,250 (optional)
Weight in ready-to-drive state ²⁾	kg	2,900 (2,755 – 3,045)	2,897 (2,752 – 3,042)	3,025 (2874 – 3176)
Maximum weights for packages and special equipment ⁴⁾	kg	231	230	100
Trailer load, braked*	kg	2,000 // 1,800 // 1,750 (optional)	2,000 // 1,800 // 1,750 (optional)	2,000 // 1,800 // 1,750 (optional)
Total length	kg	5.99	6.44	6.50
Total width	m	2.32	2.32	2.32
Overall height	m	3.15	3.15	3.15
Interior width	m	2.17	2.17	2.17
Standing height	m	1.98	1.98	1.98
Coachbuilt height	m	78	78	78
Dimensions of front side seating group	cm	-	190 x 100	-
Dimensions of rear bed	cm	200 x 140 (conversion of the seating group)	-	200 x 140 (conversion of the seating group)
Dimensions of coachbuilt bed	cm	200 x 150	200 x 150	200 x 150 // 2 x 200 x 80
Dimensions of rear seating group/longitudinal seat bench	cm	200 x 140	190 x 60	200 x 140
Sleeping areas		4	5	4
Permitted number of people with 3-point belts ³⁾		4	4 (6) optional**	4
Number of Isofix		-	2	-
Window with mosquito screen		5	5	5
Number of service flaps		3 (4) optional	3 (4) optional	3 (4) optional
Wall thickness of walls, roof, floor	mm	30 / 30 / 38	30 / 30 / 38	30 / 30 / 38
Fresh water / waste water tank size ⁵⁾	l	150/150	143/150	150/150
Fresh water tank in the drive position ⁵⁾	l	10	10	10
Battery capacity	l	80 Gel	80 Gel	80 Gel
Refrigerator	Ah	142	106	142

* Note the weight of the vehicle/trailer combination **Only with belts facing away from the direction of travel ***Only with belts facing away from the direction of travel (2-point belts) and 40 H chassis

restricted the weights for the packages and special equipment that can be ordered from the factory. This is intended to ensure that the legally prescribed minimum payload is complied with after the vehicle is shipped from the factory. If the configuration process leads to the upper limit for this defined by the manufacturer being exceeded as a result of the choice of packages and special equipment, you can only continue with the configuration process if you de-select packages, special equipment or belt-restrained seats or choose to increase the vehicle's load capacity. Otherwise, you will not be able to continue the configuration or order the configured vehicle. Please note that the calculation of the maximum weights for packages and special equipment also takes into account the special equipment features of the selected country variation / the selected special model.

5) Fresh water tank size (l) Please note that the capacity of the fresh water tank is significantly reduced in the drive position. If the payload of the individual vehicle is sufficient, it can be filled to its full capacity.

Activa One – Special features

		A ONE 570 HS	A ONE 630 LS	A ONE 650 HS	Weight difference in kg	"RRP price (€) incl. 19% VAT"
PACKAGES – FEATURE PACKAGES						
PTR22-26	AO570HS/AO650HS Travel package	O	-	O	43	4,590
PTR23-26	AO630LS Travel package	-	O	-	45	4,590
PTR25-26	AO570HS/AO650HS Travel Plus package	O	-	O	0	4,590
PTR26-26	AO630LS Travel Plus package	-	O	-	-1	4,590
2870-26	Fiat motorhomes Driving Assistance package	O	O	O	0	2,790
CHASSIS OPTION – ENGINE						
2160-26	140 HP Fiat engine	S	S	S	0	0
CHASSIS OPTION – SUPERIMPOSED LOAD						
2324-26	Increase of tot. mass to 3.65t	O	O	O	0	460
2330-26	Red of tot. mass to 3.5 t	O	O	O	0	460
2358-26	Reinforced front axle springs	O	O	O	0	990
CHASSIS OPTION – OTHER OPTIONS						
2133-26	Fiat automatic transmission in combination with a light chassis	O	O	O	60	3,690
2136-26	Fiat automatic transmission in combination with a Maxi chassis	-	-	O	20	3,690
2311-26	Maxi chassis 4.25t	-	-	O	40	1,990
2374-26	90-litre fuel tank (Fiat 2 series)	-	-	O	25	290
2890-26	Right-hand drive chassis	O	O	O	0	3,790
SUPERSTRUCTURE OPTION – EXTERIOR						
2581-26	Superstructure door with central locking	O	O	O	2	520
5111-26	Rear comfort supports	O	O	O	8	690
5122-26	Trailer tow hitch	O	O	O	35	2,490
5412-26	Multi-function socket	O	O	O	2	390
5441-26	External shower (cold/warm)	O	O	O	1	350
5521-26	"Sunroof" panoramic glass roof	O	O	O	25	1,490
5534-26	Electric roof fan	O	O	O	6	350
5535-26	Tilting skylight roof hood (Heki)	O	O	O	23	1,420
5550-26	2 additional service flaps	-	O	-	5	790
5576-26	Mosquito screen for the body door	O	O	O	5	440
6651-26	Service flap at the rear	O	-	O	3	730
SUPERSTRUCTURE OPTION – INTERIOR						
3613-26	All-round insulation in the driver's cab	O	O	O	5	620
3661-26	Insulated dividing curtain to the driver's cab	O	O	-	4	420
3671-26	Carpet in the driver's cab	O	O	O	2	150
3680-26	Driver's cab dimming system	O	O	O	7	790
6224-26	Additional bed for 2 people (conversion of seating group)	S	S	S	11	770
6225-26	Child's bed in the cab	O	O	O	10	290
6321-26	Seatbelts + headrests opposite the direction of travel	-	O	-	30	990
6341-26	Seat extension	-	O	-	10	750
6435-26	Table extension	-	O	-	4	420
7812-26	Ambient lighting	O	O	O	8	620
SUPERSTRUCTURE OPTION – BIKE CARRIER						
5146-26	Bike carrier extension kit 4-way	O	O	O	2	170
5147-26	Bike carrier for 2 bikes	O	O	O	13	650

S = Standard feature**O** = Optional feature at extra charge**P** = Optional package feature**-** = Not possible

Find a Eura Mobil
dealer near you here!

Activa One – Special features

		A ONE 570 HS	A ONE 630 LS	A ONE 650 HS	Weight difference in kg	"RRP price (€) incl. 19% VAT"
SUPERSTRUCTURE OPTION – CANOPIES						
5242-26	3.5 m canopy	O	-	-	28	1,420
5243-26	4 m canopy	-	O	O	33	1,670
SUPERSTRUCTURE OPTION – HEATING						
7228-26	Combi 6 E heating	O	O	O	1	790
7510-26	Autonomous E-bike charger	O	O	O	3	3,730
SUPERSTRUCTURE OPTION – KITCHEN						
7230-26	Extractor hood	O	O	O	3	580
7238-26	Oven	O	O	O	15	1,400
7255-26	Large refrigerator	S	O	S	18	1,400
SUPERSTRUCTURE OPTION – TECHNICAL SERVICES						
7321-26	Lithium battery (1x)	O	O	O	-13	3,300
7324-26	Lithium battery (2x)	O	O	O	18	2,990
7327-26	2nd gel battery - 80 Ah	O	O	O	27	600
7341-26	Pre-cabling for solar power system	O	O	O	2	350
7512-26	External gas socket	O	O	O	1	330
7516-26	Dual-control CS with de-icer	O	O	O	11	570
SUPERSTRUCTURE OPTION – FABRICS						
6111-26	Protective covers in structured upholstery fabric for the driver and passenger seat	O	O	O	4	410
6113-26	"Milano" upholstery fabric	O	O	O	0	590
6132-26	"Dara" upholstery fabric	S	S	S	0	0
6139-26	"Genua" upholstery fabric	O	O	O	0	590
6192-26	"Maka" décor	S	S	S	0	0
6193-26	"Lasca" décor	O	O	O	0	0
6196-26	"Tisa" décor	O	O	O	0	0
6510-26	Décor package (textile appliqué in the living area that matches the window décor, coachbuilt trim in upholstery fabric, including two pockets; spice rack in the kitchen, soap dispenser, shower grate, clothes hook in the living area)	-	O	-	18	1,320
6511-26	Décor package for the rear seating group (coachbuilt trim in upholstery fabric, including two pockets; spice rack in the kitchen, soap dispenser, shower grate, clothes hook in the living area)	O	-	O	13	1,320
SUPERSTRUCTURE OPTION – MULTIMEDIA						
3215-26	Loudspeakers (2) in the superstructure	O	O	O	4	490
3237-26	Moniceiver with rear-view camera	O	O	O	1	1,490
3238-26	Naviceiver w. rear-view camera	O	O	O	1	2,630
3441-26	Flat screen wall bracket in rear area	O	-	O	1	750
3460-26	Flat screen pull-out in front area	-	O	-	4	750
MISCELLANEOUS						
9813-26	Reduction of permit by 1 person	O	O	O	0	0
9814-26	Reduction of permit by 2 persons	O	O	O	0	0
9815-26	Reduction of permit by 3 persons	-	O	-	0	0
9816-26	Reduction of permit by 4 persons	-	O	-	0	0
MANDATORY						
9009	Gas safety certificate, COC document or vehicle paperwork, TÜV approval and pre-carriage	O	O	O	0	490
A80	Transfer costs	O	O	O	0	1.690



Profila T

Feature highlights

- 11-cm high, heated double floor with floor storage compartments
- Elegant roof transition between driver's cab and body
- Large rear garages thanks to rear lowering with fully insulated underbody trough
- Winter-proof according to EN 1646-2
- Wood-free walls with continuous insulation (rot-proof)
- New furniture architecture in "Chalet Rustico" design (3-year guarantee)
- Bonded and all-round-sealed body composite made of hail-protected glass-fibre reinforced plastic (GRP) featuring Eura Mobil Sealed Structure Technology
- 10-year leak guarantee (up to 150,000 km)
- Water tanks heated and insulated in the double floor or in heated trough
- Electrically controlled waste water tank drainage
- Central technology compartment
- 140 HP engine, Euro 6E, AE
- Noise-insulated window roller blinds (Seitz comfort roller blinds)
- Ambient lighting
- Illuminated entrance area with space for a TV of up to 32" (all floor plans except 660 EB)
- Kitchen base unit with pull-outs
- Worktop illuminated from underneath for illumination of the kitchen pull-outs
- Comfort shower with back-lit shower column (depending on floor plan)
- Shower grate in the washroom
- Single-bed floor plans with adjustable bed frame and pull-out for conversion into a double bed
- USB port for charging mobile devices
- Anchor rail for rear garage
- Seitz frame windows flush with the outer wall
- Body door with window and waste bin
- Mini-Heki skylight over rear bed
- 16" wheels
- LED exterior lighting over body door
- 230 V power socket in washroom
- Combi 4 heating for PT 660 EB, 675 SB, 695 EB
- Alde hot water heating for PT 720 EB, EF, QF
- Manual air conditioning system in the driver's cab
- Front passenger airbag



Variable garage

On the QF models, the height-adjustable bed provides space even for the transport of bicycles.



Couldn't be any easier

The sofas in the EF and QF floor plans can be transformed into single seats in the direction of travel – with Isofix mounts – in no time.

The elegant comfort tourer.

Modern low-profile model with double floor and extensive features.

Spacious room layout with stylish, high-quality interior. Agile handling and excellent all-season characteristics.

”

New furniture architecture with "Chalet Rustico" interior design



▼ Example floor plan: PT 720 EF



The plus points in the interior include: Wall units in a continuous line through to the driver's cab, a large panoramic roof window, two fold-out single seats with Isofix mounts and a table with a folding top.

Profila T – Floor plans



PT 660 EB

Total length:	6.99 m
Total width:	2.32 m
Weight class:	3.5 t
Number of seats:	4
Sleeping areas:	2/4 (optional)

- + Two 2m long comfort single beds
- + Extra-large rear garage with large load volume
- + Comfortable L-shaped seating group with side bench seat
- + Screen pull-out at the seating group (optional)
- + Washroom with integrated shower and swivel washbasin
- + Longitudinal kitchen with extra-wide pull-outs and 142-litre refrigerator



PT 675 SB

Total length:	6.99 m
Total width:	2.32 m
Weight class:	3.5 t
Seats:	4 (5) (optional)
Sleeping areas:	2/4 (optional)

- + Longitudinally installed double bed with particularly comfortable entry height
- + Rear bathroom with integrated shower cubicle
- + Ergonomically designed corner kitchen with 140-litre refrigerator in individual arrangement
- + Large storage space under the rear bed for camping furniture etc.
- + Floor-to-ceiling wardrobe
- + Comfortable L-shaped seating group with 1.1-m wide sofa on the passenger side
- + Generous open space effect due to free lines of sight



PT 695 EB

Total length:	6.99 m
Total width:	2.32 m
Weight class:	3.5 t
Seats:	4 (5) (optional)
Sleeping areas:	2/4 (optional)

- + Single beds in the rear
- + Large rear garage
- + Ergonomically designed corner kitchen with 143-litre refrigerator
- + Comfortable L-shaped seating group
- + Washroom with shower and swivel washbasin



PT 720 EB

Total length:	7.41 m
Total width:	2.32 m
Weight class:	3.5 t
Seats:	4 (5) (optional)
Sleeping areas:	2/4 (optional)

- + Single beds in the rear
- + Large rear garage
- + Rear bathroom with separate shower
- + Washroom as separate dressing room variably closable on both sides with sliding doors
- + Ergonomically designed corner kitchen with 142-litre refrigerator in individual arrangement
- + Comfortable L-shaped seat bench with single seat on the passenger side



PT 720 EF

Total length:	7.41 m
Total width:	2.32 m
Weight class:	3.5 t
Seats:	3 (4) (optional)
Sleeping areas:	2/4 (optional)

- + Comfort seating group with two-person sofas positioned opposite each other
- + Table with folding top, height adjustable
- + Single beds in the rear
- + Large rear garage
- + Rear bathroom with separate shower
- + Washroom as separate dressing room variably closable on both sides with sliding doors



PT 720 QF

Total length:	7.57 m
Total width:	2.32 m
Weight class:	3.5 t
Seats:	2 (3) (4) (optional)
Sleeping areas:	2 (4) (optional)

- + Comfort seating group with two-person sofas positioned opposite each other
- + Table with folding top
- + Central queen bed in the rear
- + Bed with sliding slatted frame, adjustable headboard and linen compartment
- + Large rear garage thanks to height-adjustable bed
- + Washroom variably closable on both sides with sliding doors

Profila T – Feature packages

Optional feature packages

Mondial package

Optional for: PROFILA T

Electric parking brake	Moniceiver with rear-view camera
Captain's chair seats	Body door with 2-point locking + central locking system
Steering wheel controls	Roof - "Sun Roof" panoramic glass roof insulated
Bumpers painted in the vehicle colour	Electric roof fan
Fog lights incl. cornering light	Manual dimming system for driver's cab
Black skid plate	Door mosquito screen
16" aluminium rims	Pre-cabing for solar power system
Leather steering wheel and gearshift knob	Heki skylight roof hood
Dashboard with chrome-plated air vents	Radio preparation incl. DAB+

Mondial Plus package (only in combination with Mondial package)

Optional for: PROFILA T

Automatic air conditioning	External shower (cold/warm)
Inductive charging station	External gas socket on passenger side
7" digital instrument panel	Insulated curtain
Naviceiver w. rear-view camera	Combi 6E heating (for PT 660 EB, 675 SB, 695 EB)
Carpet in the driver's cab	Exclusive rear design
Multi-function exterior socket	Lithium battery

Driving Assistance package

Optional for: PROFILA T

Safety package (emergency braking and lane departure assistant, rain and light sensor, traffic sign recognition, automatic beam dipping, fog light with cornering light)

Full LED headlights

Adaptive cruise control 30km/h+intelligent speed assistant

Find a Eura Mobil
dealer near you here!

Profila T – Technical specifications



		PT 660 EB	PT 675 SB	PT 695 EB
Base vehicle		Fiat Ducato 16" / 3.5 t	Fiat Ducato 16" / 3.5 t	Fiat Ducato 16" / 3.5 t
Engine model, Euro 6E, AE		103 kW (140 HP)	103 kW (140 HP)	103 kW (140 HP)
Engine models (optional)		130 kW (180 HP)	130 kW (180 HP)	130 kW (180 HP)
Chassis		Fiat CCS low-slung frame	Fiat CCS low-slung frame	Fiat CCS low-slung frame
Fuel tank	l	60 L diesel + 19 L Ad Blue	60 L diesel + 19 L Ad Blue	60 L diesel + 19 L Ad Blue
Dimensions and weights				
Double floor height	cm	11	11	11
Load volume in the rear storage area	l	2,700	1,500	2,700
Size of storage door at the rear	cm	85 x 115	85x70	85x115
Wheelbase	m	4.04	4.04	4.04
Tyres		225/75R16C	225/75 R16C	225/75 R16C
Technically permissible overall weight ¹⁾	kg	3,500 // 4,250 // 4,400 (optional)	3,500 // 4,250 // 4,400 (optional)	3,500 // 4,250 // 4,400 (optional)
Weight in ready-to-drive state ²⁾	kg	2,985 (2,836 – 3,134)	2,954 (2,807 – 3,102)	2,954 (2,806 – 3,101)
Maximum weights for packages and special equipment ⁴⁾	kg	135	167	167
Trailer load, braked*	kg	2,000 // 1,800 // 1,750 (optional)	2,000 // 1,800 // 1,750 (optional)	2,000 // 1,800 // 1,750 (optional)
Total length	m	6.99	6.99	6.99
Total width	m	2.32	2.32	2.32
Total height incl. Heki	m	2.86	2.86	2.86
Interior width	m	2.17	2.17	2.17
Standing height	m	1.98	1.98	1.98
Dimensions of front side seating group	cm	115 x 105	115 x 105	115 x 105
Bed conversion of the seating group ³⁾	cm	200 x 115	200 x 124	200 x 115
Dimensions of rear bed	cm	195 x 80, 195 x 80	195 x 137	190 x 80, 185 x 80
Dimension of longitudinal bench	cm	50 x 65	110 x 65	55 x 65
Sleeping areas		2/4 (optional)	2/4 (optional)	2/4 (optional)
Permitted number of people with 3-point belts ³⁾		4	4 (5) (optional)**	4 (5) (optional)**
Number of Isofix		1	1	1
Framed window with mosquito screen		4	4	4
Number of service flaps		2	2	2
Wall thickness of walls, roof, floor	mm	30 / 30 / 38	30 / 30 / 38	30 / 30 / 38
Fresh water / waste water tank ⁵⁾	l	140 / 100	140 / 100	140 / 100
Fresh water tank in the drive position ⁵⁾	l	10	10	10
Battery capacity	Ah	80 Gel	80 Gel	80 Gel
Refrigerator	l	142	140	142

¹⁾Technically permissible overall weight (kg) The technically permissible overall weight in a laden state refers to the overall weight defined by the manufacturer that the vehicle may not exceed when in drive mode.

²⁾The weight in the ready-to-drive state (kg) The weight in the ready-to-drive state refers to the weight of the vehicle (with standard features according to the manufacturer's specifications) with its fuel tank filled to at least 90% of capacity and includes the weight of the driver (which is calculated at a nominal value of 75 kg), the weight of the fuel and fluids, the weight of the superstructure and the driver's cab, and the weight of the towing hitch and the tyre repair kit (to the extent these are present). This represents a calculated value that is subject to legally permissible fluctuations of up to ± 5% (see additional text in brackets). Since these legally permissible fluctuations impact the vehicle's payload and therefore also the weights of the packages and special equipment that can be ordered, the occurrence of such fluctuations must be factored into the configuration process and the choice of packages and special equipment.

³⁾Permitted number of people with 3-point belts The weight of the passengers is calculated at a nominal 75 kg per seat, whereas the weight of the driver, which was already taken into account in the weight in the ready-to-drive state, must be deducted. In the case of a vehicle with four belt-restrained seats, the weight of the passengers is therefore 225 kg (3 x 75 kg).

⁴⁾Maximum weights for packages and special equipment The maximum weights for packages and special equipment represent a value calculated for each floor plan with which we have

Profila T – Technical specifications



PT 720 EB	PT 720 EF	PT 720 QF
Fiat Ducato 16" / 3.5 t	Fiat Ducato 16" / 3.5 t	Fiat Ducato 16" / 3.5 t
103 kW (140 HP)	103 kW (140 HP)	103 kW (140 HP)
130 kW (180 HP)	130 kW (180 HP)	130 kW (180 HP)
Fiat CCS low-slung frame	Fiat CCS low-slung frame	Fiat CCS low-slung frame
60 L diesel + 19 L Ad Blue	60 L diesel + 19 L Ad Blue	60 L diesel + 19 L Ad Blue
11	11	11
3,000	3,000	1,500
80x115	80x115	80 x 115
4.04	4.04	4.04
225/75 R16C	225/75 R16C	225/75 R16C
3,500 // 4,250 // 4,400 (optional)	3,500 // 4,250 // 4,400 (optional)	3,500 // 4,250 // 4,400 (optional)
3,103 (2,948 – 3,258)	3,134 (2,977 – 3,290)	3,200 (3,040 – 3,360)
11	11	11
2,000 // 1,800 // 1,750 (optional)	2,000 // 1,800 // 1,750 (optional)	2,000 // 1,800 // 1,750 (optional)
7.41	7.41	7.57
2.32	2.32	2.32
2.86	2.86	2.86
2.17	2.17	2.17
1.98	1.98	1.98
115 x 105	99 x 60	99 x 60
200 x 115	200 x 100	200 x 100
2 x 203 x 84	2 x 203 x 83	190 x 147
55 x 65	99 x 60	99 x 60
2/4 (optional)	2/4 (optional)	2/4 (optional)
4 (5) (optional)**	3 (4) (optional)**	2 (3) (4) (optional)**
1	2	2
4	4	4
2	2	2
30 / 30 / 38	30 / 30 / 38	30 / 30 / 38
140 / 100	138 / 100	138 / 100
10	10	10
80 Gel	80 Gel	80 Gel
142	142	142

* Note the weight of the vehicle/trailer combination ** Numbers in brackets only in combination with 2324 "superimposed load to 3,65t" or 2311/2313 Maxi chassis

restricted the weights for the packages and special equipment that can be ordered from the factory. This is intended to ensure that the legally prescribed minimum payload is complied with after the vehicle is shipped from the factory. If the configuration process leads to the upper limit for this defined by the manufacturer being exceeded as a result of the choice of packages and special equipment, you can only continue with the configuration process if you de-select packages, special equipment or belt-restrained seats or choose to increase the vehicle's load capacity. Otherwise, you will not be able to continue the configuration or order the configured vehicle. Please note that the calculation of the maximum weights for packages and special equipment also takes into account the special equipment features of the selected country variation / the selected special model.

***Fresh water tank size (l)** Please note that the capacity of the fresh water tank is significantly reduced in the drive position. If the payload of the individual vehicle is sufficient, it can be filled to its full capacity.



Profila RS

Feature highlights

- Lift-up bed flush with ceiling with storage compartments in stable GRP roof compartment
- Bed size (lift-up bed) 190x143cm
- Also wall units under the lift-up bed in one visual line
- Full standing height of 198 cm under the lift-up bed
- 11-cm high heated double floor with floor storage compartments
- Elegant roof transition between driver's cab and body
- Large rear garages thanks to rear lowering with fully insulated underbody trough
- Wood-free walls with continuous insulation (rot-proof)
- New furniture architecture in "Chalet Rustico" design (3-year guarantee)
- Bonded and all-round-sealed body composite made of hail-protected glass-fibre reinforced plastic (GRP) featuring Eura Mobil Sealed Structure Technology
- 10-year leak guarantee (up to 150,000 km)
- Water tanks heated and insulated in the double floor or in heated trough
- Electrically controlled waste water tank drainage
- With electrically controlled lift-up bed on request
- 140 HP engine, Euro 6E, AE
- Noise-insulated window roller blinds (Seitz comfort roller blinds)
- Ambient lighting
- Illuminated entrance area with space for a TV of up to 32" (all floor plans)
- Illuminated entrance with storage facilities
- Kitchen base unit with pull-outs instead of doors
- Worktop illuminated from underneath for illumination of the kitchen pull-outs
- Comfort rain shower with back-lit shower column (depending on floor plan)
- Shower grate in the washroom
- Single-bed floor plans with adjustable bed frame and pull-out for conversion into a double bed
- USB port for charging mobile devices
- Anchor rail for rear garage
- Seitz frame windows flush with the outer wall
- Winter-proof acc. to EN 1646-1 in conjunction w. all-round insulation (3613)
- Body door with window and waste bin
- Mini-Heki skylight over rear bed
- 16" wheels
- Exterior lighting over body door
- 230 V power socket in washroom
- Combi heating for PRS 675 SB, 695 EB, 695 HB
- Alde hot water heating for 720 EB, 720 EF, 720 QF
- Front passenger airbag
- Manual air conditioning system in the driver's cab



For tall people

The single bed variants EB / EF have large garages and comfortable beds with bed lengths of up to 196 cm. There is a wardrobe underneath and a linen compartment under the second bed.



A clear symbol of quality

Stable GRP roof compartment on the Profila RS for the lift-up bed instead of a simple flip-up wall with a curved standard roof.



Mirror or window in the bathroom?

Both: for more light and air, the mirror cabinet can be pushed aside. "Hidden" behind it is the bathroom window – for the perfect use of space and for maximum variability for even more comfort.

For relaxed travel.

Profila RS: The Profila with lift-up bed hidden flush with the ceiling.

During the day, full standing height is maintained under the bed.

The bed, which can be electrically operated on demand, lies protected in an elegant and stable GRP roof compartment.



New furniture architecture with "Chalet Rustico" interior design



▼ Example floor plan: PRS 675 SB



The plus points in the interior include: Panoramic glass roof and Midi-Heki skylight for plenty of light and air in the roof storey; kitchen block with ample work space and deep, heavy-duty pull-outs, black fittings with swivel water outlet ...

Profila RS – Floor plans



PRS 675 SB

Total length:	6.99 m
Total width:	2.32 m
Weight class:	3.5 t
Seats:	4 (5) (optional)
Sleeping areas:	4 (6) (optional)

- + Longitudinally installed double bed with particularly comfortable entry height
- + Rear bathroom with integrated shower cubicle
- + Ergonomically designed corner kitchen with 140-litre refrigerator in individual arrangement
- + Large storage space under the rear bed for camping furniture etc.
- + Floor-to-ceiling wardrobe
- + Comfortable L-shaped seating group with 1.1-m wide sofa on the passenger side
- + Generous open space effect due to free lines of sight



PRS 695 EB

Total length:	6.99 m
Total width:	2.32 m
Weight class:	3.5 t
Seats:	4 (5) (optional)
Sleeping areas:	4 (6) (optional)

- + Single beds in the rear
- + Large rear garage
- + Ergonomically designed corner kitchen with 142-litre refrigerator
- + Comfortable L-shaped seating group
- + Washroom with shower and swivel washbasin



PRS 695 HB

Total length:	6.99 m
Total width:	2.32 m
Weight class:	3.5 t
Seats:	3 (4) (5) (optional)
Sleeping areas:	4 (6) (optional)

- + Double bed in the rear with comfortable side entry into the rear bed
- + Large rear garage
- + Washroom with integrated shower and swivel washbasin
- + Floor-to-ceiling wardrobe
- + Ergonomic corner kitchen with 142-litre refrigerator in individual arrangement
- + Comfortable L-shaped seating group with single seat on the passenger side



PRS 720 EB

Total length:	7.41 m
Total width:	2.32 m
Weight class:	3.5 t
Seats:	2 (3) (4) (5) (optional)
Sleeping areas:	4 (6) (optional)

- + Single beds in the rear
- + Large rear garage
- + Rear bathroom with separate shower
- + Washroom as separate dressing room variably closable on both sides with sliding doors
- + Ergonomically designed corner kitchen with 142-litre refrigerator in individual arrangement
- + Comfortable L-shaped seat bench with single seat on the passenger side



PRS 720 EF

Total length:	7.41 m
Total width:	2.32 m
Weight class:	3.5 t
Seats:	2 (3) (4) (optional)
Sleeping areas:	4 (6) (optional)

- + Comfort seating group with two-person sofas positioned opposite each other
- + Single beds in the rear
- + Large rear garage
- + Rear bathroom with separate shower
- + Washroom as separate dressing room variably closable on both sides with sliding doors
- + Ergonomically designed corner kitchen with 142-litre refrigerator in individual arrangement



PRS 720 QF

Total length:	7.57 m
Total width:	2.32 m
Weight class:	3.5 t
Seats:	2 (4) (optional)
Sleeping areas:	4 (6) (optional)

- + Comfort seating group with two-person sofas positioned opposite each other
- + Table with folding top
- + Central queen bed in the rear
- + Bed with sliding slatted frame, adjustable headboard and linen compartment
- + Large rear garage thanks to height-adjustable bed
- + Washroom variably closable on both sides with sliding doors

Profila RS – Feature packages

Optional feature packages

PRS Mondial package

Optional for: PROFILA RS

Electric parking brake	Moniceiver with rear-view camera
Captain's chair seats	Body door with 2-point locking and central locking system
Steering wheel controls	Roof - "Sun Roof" panoramic glass roof insulated
Bumpers painted in the vehicle colour	Electric roof fan
Fog lights incl. cornering light	Manual dimming system for driver's cab
Black skid plate	Door mosquito screen
16" aluminium rims	Pre-cabling for solar power system
Leather steering wheel and gearshift knob	Radio preparation incl. DAB+
Dashboard with chrome-plated air vents	

PRS Mondial Plus package (only in combination with Mondial package)

Optional for: PROFILA RS

Automatic air conditioning	External shower (cold/warm)
Inductive charging station	External gas socket on passenger side
7" digital instrument panel	Insulated curtain
Naviceiver w. rear-view camera	Combi 6 E heating (for PRS 675 SB, 695 EB, 695 HB)
Carpet in the driver's cab	Exclusive rear design
Multi-function exterior socket	Lithium battery

Driving Assistance package

Optional for: PROFILA RS

Safety package (emergency braking and lane departure assistant, rain and light sensor, traffic sign recognition, automatic beam dipping, fog light with cornering light)

Full LED headlights

Adaptive cruise control 30km/h+intelligent speed assistant

Profila RS – Technical specifications



		PRS 675 SB	PRS 695 EB	PRS 695 HB
Base vehicle		Fiat Ducato 16" / 3.5 t	Fiat Ducato 16" / 3.5 t	Fiat Ducato 16" / 3.5 t
Engine model, Euro 6d Final		103 kW (140 HP)	103 kW (140 HP)	103 kW (140 HP)
Engine models (optional)		130 kW (180 HP)	130 kW (180 HP)	130 kW (180 HP)
Chassis		Fiat CCS low-slung frame	Fiat CCS low-slung frame	Fiat CCS low-slung frame
Fuel tank	l	60 L diesel + 19 L Ad Blue	60 L diesel + 19 L Ad Blue	60 L diesel + 19 L Ad Blue
Dimensions and weights				
Double floor height	cm	11	11	11
Load volume in the rear storage area	l	1,500	2,700	2,700
Size of storage door at the rear	cm	85 x 70	85 x 115	85 x 115
Wheelbase	m	4.04	4.04	4.04
Tyres		225/75 R16C	225/75 R16C	225/75 R16CP
Technically permissible overall weight ¹⁾	kg	3,500 // 4,250 // 4,400 (optional)	3,500 // 4,250 // 4,400 (optional)	3,500 // 4,250 // 4,400 (optional)
Weight in ready-to-drive state ²⁾	kg	3,074 (2,920 – 3,228)	3,065 (2,912 – 3,219)	3,074 (2,920 – 3,298)
Maximum weights for packages and special equipment ⁴⁾	kg	45	54	130
Trailer load, braked*	kg	2,000 // 1,800 // 1,750 (optional)	2,000 // 1,800 // 1,750 (optional)	2,000 // 1,800 // 1,750 (optional)
Total length	m	6.99	6.99	6.99
Total width	m	2.32	2.32	2.32
Overall height	m	3.00	3.00	3.00
Interior width	m	2.17	2.17	2.17
Standing height	m	1.98	1.98	1.98
Dimensions of front side seating group	cm	115 x 105	115 x 105	115 x 105
Bed conversion of the seating group**	cm	200 x 124	200 x 115	200 x 115
Dimensions of rear bed	cm	195 x 137	190 x 80, 185 x 80	217 / 190 x 150
Dimensions of lift-up bed	cm	193 x 140	193 x 140	193 x 140
Dimension of longitudinal bench	cm	110 x 65	55 x 65	55 x 65
Sleeping areas		4 (6) optional	4 (6) optional	4 (6) optional
Permitted number of people with 3-point belts ³⁾		4 (5) optional***	4 (5) optional***	3 (4) (5) optional***
Number of Isofix		1	1	1
Framed window with mosquito screen		4	4	4
Number of service flaps		2	2	2
Wall thickness of walls, roof, floor	mm	30 / 30 / 38	30 / 30 / 38	30 / 30 / 38
Fresh water / waste water tank ⁵⁾	l	140 / 100	140 / 100	140 / 100
Fresh water tank in the drive position ⁵⁾	l	10	10	10
Battery capacity	Ah	80 Gel	80 Gel	80 Gel
Refrigerator	l	140	142	142

¹⁾Technically permissible overall weight (kg) The technically permissible overall weight in a laden state refers to the overall weight defined by the manufacturer that the vehicle may not exceed when in drive mode.

²⁾The weight in the ready-to-drive state (kg) The weight in the ready-to-drive state refers to the weight of the vehicle (with standard features according to the manufacturer's specifications) with its fuel tank filled to at least 90% of capacity and includes the weight of the driver (which is calculated at a nominal value of 75 kg), the weight of the fuel and fluids, the weight of the superstructure and the driver's cab, and the weight of the towing hitch and the tyre repair kit (to the extent these are present). This represents a calculated value that is subject to legally permissible fluctuations of up to ± 5% (see additional text in brackets). Since these legally permissible fluctuations impact the vehicle's payload and therefore also the weights of the packages and special equipment that can be ordered, the occurrence of such fluctuations must be factored into the configuration process and the choice of packages and special equipment.

³⁾Permitted number of people with 3-point belts The weight of the passengers is calculated at a nominal 75 kg per seat, whereas the weight of the driver, which was already taken into account in the weight in the ready-to-drive state, must be deducted. In the case of a vehicle with four belt-restrained seats, the weight of the passengers is therefore 225 kg (3 x 75 kg).

⁴⁾Maximum weights for packages and special equipment The maximum weights for packages and special equipment represent a value calculated for each floor plan with which we have

Profila RS – Technical specifications



PRS 720 EB

Fiat Ducato 16" / 3.5 t

103 kW (140 HP)

130 kW (180 HP)

Fiat CCS low-slung frame

60 L diesel + 19 L Ad Blue

PRS 720 EF

Fiat Ducato 16" / 3.5 t

103 kW (140 HP)

130 kW (180 HP)

Fiat CCS low-slung frame

60 L diesel + 19 L Ad Blue

PRS 720 QF

Fiat Ducato 16" / 3.5 t

103 kW (140 HP)

130 kW (180 HP)

Fiat CCS low-slung frame

60 L diesel + 19 L Ad Blue



More information

Click here for more information on floor plans, upholstery, interiors and more.



Find a
Eura Mobil dealer
near you here!

11	11	11
3,000	3,000	1,500
80 x 115	80 x 115	80 x 115
4.04	4.04	4.04
225/75 R16C	225/75 R16C	225/75 R16C
3,500 // 4,250 // 4,400 (optional)	3,500 // 4,250 // 4,400 (optional)	3,500 // 4,250 // 4,400 (optional)
3,218 (3,057 – 3,379)	3,242 (3,080 – 3,404)	3,262 (3,099 – 3,425)
59	40	18
2,000 // 1,800 // 1,750 (optional)	2,000 // 1,800 // 1,750 (optional)	2,000 // 1,800 // 1,750 (optional)
7.41	7.41	7.57
2.32	2.32	2.32
3.00	3.00	3.00
2.17	2.17	2.17
1.98	1.98	1.98
115 x 105	99 x 60	99 x 60
200 x 115	200 x 100	200 x 100
203 x 84, 203 x 84	2 x 203 x 83	190 x 150
193 x 140	193 x 140	193 x 140
55 x 65	99 x 60	99 x 60
4 (6) optional	4 (6) optional	4 (6) optional
2 (3) (4) (5) optional***	2 (3) (4) optional***	2 (4) optional***
1	2	2
4	4	4
2	2	2
30 / 30 / 38	30 / 30 / 38	30 / 30 / 38
138/100	138/100	138/100
10	10	10
80 Gel	80 Gel	80 Gel
142	142	142

* Note the weight of the vehicle/trailer combination

** Not in combination with 6430 table with chrome-plated table base

*** Numbers in brackets only in combination with 2324 "superimposed load to 3.65 t" or 2311/2313 Maxi chassis

restricted the weights for the packages and special equipment that can be ordered from the factory. This is intended to ensure that the legally prescribed minimum payload is complied with after the vehicle is shipped from the factory. If the configuration process leads to the upper limit for this defined by the manufacturer being exceeded as a result of the choice of packages and special equipment, you can only continue with the configuration process if you de-select packages, special equipment or belt-restrained seats or choose to increase the vehicle's load capacity. Otherwise, you will not be able to continue the configuration or order the configured vehicle. Please note that the calculation of the maximum weights for packages and special equipment also takes into account the special equipment features of the selected country variation / the selected special model.

5Fresh water tank size (l) Please note that the capacity of the fresh water tank is significantly reduced in the drive position. If the payload of the individual vehicle is sufficient, it can be filled to its full capacity.



Profila T Mercedes

Feature highlights

- Mercedes Sprinter 415 CDI
- ALDE hot water heating
- AL-KO low frame
- 19.5-cm high heated double floor with floor storage compartments
- Elegant roof transition between driver's cab and body
- "Sun Roof" panoramic roof window, insulated and adjustable (optional)
- Large rear garages thanks to rear lowering with fully insulated underbody trough
- Winter-proof according to EN 1646-2
- Wood-free walls with continuous insulation (rot-proof)
- New furniture architecture in "Natural Heritage" or "Chalet Rustico" design (3-year guarantee)
- Bonded and all-round-sealed body composite made of hail-protected glass-fibre reinforced plastic (GRP) featuring Eura Mobil Sealed Structure Technology
- 10-year leak guarantee (up to 150,000 km)
- Water tanks heated and insulated in the double floor or in heated trough
- Electrically controlled waste water tank drainage
- Central technology compartment
- Noise-insulated window roller blinds (Seitz comfort roller blinds)
- Ambient lighting
- Illuminated entrance area with space for a TV of up to 32" (all floor plans)
- Kitchen base unit with pull-outs
- Worktop illuminated from underneath for illumination of the kitchen pull-outs
- Comfort rain shower with back-lit shower column (depending on floor plan)
- Shower grate in the washroom
- Single-bed floor plans with adjustable bed frame and pull-out for conversion into a double bed
- USB port for charging mobile devices
- Anchor rail for rear garage
- Seitz frame windows flush with the outer wall
- Body door with window and waste bin
- Mini-Heki skylight over rear bed
- 16" wheels
- Exterior lighting over body door
- 230 V power socket in washroom
- Front passenger airbag



Always handy

There is plenty of additional storage space in the floor hatches and storage compartments of the double floor that can be reached from the inside in a single action.



New star era

The modern driver's cab of the Mercedes Sprinter with innovative safety and assistance systems conveys relaxed travel comfort.



Quick loading hatch

The exterior storage compartment integrated into the body at a convenient loading height can be used for frequently used parking spot utensils in the models from 696 EB.

A true delight.

The Profila T on the Mercedes Sprinter promises holiday enjoyment in its purest form. With great attention to detail, we have now brought our best-selling series to the highest level of perfection in the exclusive combination with the Mercedes Sprinter chassis.



Furniture architecture in "Chalet Rustico" or "Natural Heritage" interior design



▼ Example floor plan: PT 726 EF "Natural Heritage"



The plus points in the interior include: "Natural Heritage" interior in pine / walnut décor, spot lighting, free lines of sight for a spacious feel, cellar and underfloor heating in one: Heated double floor

Profila T Mercedes- Floor plans



PT 696 EB

Total length:	7.12 m
Total width:	2.32 m
Weight class:	3.5 t
Number of seats:	4
Sleeping areas:	2/4 (optional)

- + Single beds in the rear
- + Large rear garage
- + Ergonomically designed corner kitchen with 142-litre refrigerator
- + Comfortable L-shaped seating group
- + Bathroom with shower and swivel washbasin



PT 726 EB

Total length:	7.54 m
Total width:	2.32 m
Weight class:	3.5 t
Number of seats:	4
Sleeping areas:	2/4 (optional)

- + Comfortable L-shaped seat bench with single seat on the passenger side
- + Comfort kitchen with large refrigerator in individual arrangement
- + Single beds in the rear
- + Large rear garage
- + Rear bathroom with separate shower
- + Washroom as separate dressing room variably closable on both sides with sliding doors



PT 726 EF

Total length:	7.44 m
Total width:	2.32 m
Weight class:	3.5 t
Seats:	3 (4) (optional)
Sleeping areas:	2/4 (optional)

- + Comfort seating group with two-person sofas positioned opposite each other
- + Table with folding top, height adjustable
- + Single beds in the rear
- + Large rear garage
- + Rear bathroom with separate shower
- + Washroom as separate dressing room variably closable on both sides with sliding doors



PT 726 QF

Total length:	7.61 m
Total width:	2.32 m
Weight class:	3.5 t
Seats:	3 (4) (optional)
Sleeping areas:	2 (4) (optional)

- + Comfort seating group with two-person sofas positioned opposite each other
- + Table with folding top
- + Central queen bed in the rear
- + Bed with sliding slatted frame, adjustable headboard and linen compartment
- + Large rear garage thanks to height-adjustable bed
- + Washroom variably closable on both sides with sliding doors



Find a Eura Mobil
dealer near you here!

Eura Mobil
Sealed Structure

Profila T Mercedes – Feature packages

Optional feature packages

Mondial package

Optional for: PROFILA T MERCEDES

Electric exterior mirrors	Heki skylight roof hood (not in combination with lift-up bed)
Captain's chair seats (Aguti)	Manual dimming system for driver's cab
Driver's cab air conditioning system	Door mosquito screen
Heat-insulating glass with band filter	Pre-cabing for solar power system
Uni black paintwork	Smartphone integration
Body door with 2-point locking + central locking system	Storage incl. Wireless Charging
Adjustable plastic roof – "Sun Roof" panoramic window	Adjustable steering wheel
Electric roof fan	

Mondial Plus package (only in combination with Mondial package)

Optional for: PROFILA T MERCEDES

Climatronic automatic air conditioning	Exclusive rear design
Leather steering wheel	Lithium battery
16" aluminium rims	Hinged lids for storage compartments
Carpet in the driver's cab	170 HP engine (surcharge compared to 150 HP)
Multi-function exterior socket	Dashboard charging package
External shower (cold/warm)	
External gas socket on passenger side	
Insulated curtain	

Mondial "S" package (only in combination with Mondial Plus package)

Optional for: PROFILA T MERCEDES

92-litre tank
4.5 m mechanical canopy
Bumpers & attachment parts in vehicle colour
17" aluminium rims
Chrome-plated radiator grille
Traffic sign assistant
DISTRONIC active distance assistant
Exterior paintwork obsidian black
Truma DuoControl with remote display incl. de-icer and crash sensor

Mercedes Driving Assistance package

Optional for: PROFILA T MERCEDES

High beam assistant
Fog lights
LED high performance headlights

Profil T Mercedes – Technical specifications



		PT 696 EB	PT 726 EB	PT 726 EF	PT 726 QF
Base vehicle		MB Sprinter 415 CDI	MB Sprinter 415 CDI	MB Sprinter 415 CDI	MB Sprinter 415 CDI
Engine model, Euro VI		110 kW (150 HP)	110 kW (150 HP)	110 kW (150 HP)	110 kW (150 HP)
Engine models (optional)		125 kW (170 HP)	125 kW (170 HP)	125 kW (170 HP)	125 kW (170 HP)
Chassis		AL-KO chassis	AL-KO chassis	AL-KO chassis	AL-KO chassis
Fuel tank	l	60 L diesel + 22 L AdBlue	60 L diesel + 22 L AdBlue	60 L diesel + 22 L AdBlue	60 L diesel + 22 L AdBlue
Dimensions and weights					
Double floor height	cm	19.5	19.5	19.5	19.5
Load volume in the rear storage area	l	2,700	3,000	3,000	1,500
Size of storage door at the rear	cm	85 x 115 / 85 x 95	80x115	80x115	80 x 115
Wheelbase	m	4.11	4.15	4.15	4.15
Tyres		225/75 R16C	225/75 R16C	225/75 R16C	225/75 R16C
Technically permissible overall weight ¹⁾	kg	3,500 / 4,500 (optional)	3,500 / 4,500 (optional)	3,500 / 4,500 (optional)	3,500 / 4,500 (optional)
Weight in ready-to-drive state ²⁾	kg	3,017 (2,866 – 3,168)	3,109 (2,954 – 3,265)	3,097 (2,943 – 3,252)	3,126 (2,969 – 3,282)
Maximum weights for packages and special equipment ⁴⁾	kg	102	4	102	71
Trailer load, braked*	kg	1,800 / 2,000	1,800 / 2,000	1,800 / 2,000	1,800 / 2,000
Total length	m	7.12	7.54	7.44	7.61
Total width	m	2.32	2.32	2.32	2.32
Overall height	m	2.92	2.92	2.92	2.92
Standing height	m	1.98	1.98	1.98	1.98
Dimensions of front side seating group	cm	115 x 105	115 x 105	85 x 60	85 x 60
Bed conversion of the seating group**	cm	200 x 115	200 x 115	200 x 85	200 x 85
Dimensions of rear bed(s)	cm	190 x 80 / 185 x 80	2 x 203 x 83	2 x 203 x 83	190 x 147
Dimension of longitudinal bench	cm	75 x 65	85 x 65	85 x 60	85 x 60
Sleeping areas		2 (4)	2/4 (optional)	2/4 (optional)	2/4 (optional)
Permitted number of people with 3-point belts ³⁾		4	4	3 (4) optional***	3 (4) optional***
Framed window with mosquito screen		3	4	4	4
Number of service flaps		2	2	2	2
Wall thickness of walls, roof, floor	mm	30 / 30 / 38	30 / 30 / 38	30 / 30 / 38	30 / 30 / 38
Fresh water / waste water tank ⁵⁾	l	138/88	138/88	138/88	138/88
Fresh water tank in the drive position ⁵⁾	l	10	10	10	10
Battery capacity	Ah	80 Gel	80 Gel	80 Gel	80 Gel
Refrigerator	l	142	142	142	142

* Note the weight of the vehicle/trailer combination

** Not in combination with 6430 table with chrome-plated table base

*** Numbers in brackets only in combination with superimposed load to 4.5 t

¹Technically permissible overall weight (kg) The technically permissible overall weight in a laden state refers to the overall weight defined by the manufacturer that the vehicle may not exceed when in drive mode.

²The weight in the ready-to-drive state (kg) The weight in the ready-to-drive state refers to the weight of the vehicle (with standard features according to the manufacturer's specifications) with its fuel tank filled to at least 90% of capacity and includes the weight of the driver (which is calculated at a nominal value of 75 kg), the weight of the fuel and fluids, the weight of the superstructure and the driver's cab, and the weight of the towing hitch and the tyre repair kit (to the extent these are present). This represents a calculated value that is subject to legally permissible fluctuations of up to ± 5% (see additional text in brackets). Since these legally permissible fluctuations impact the vehicle's payload and therefore also the weights of the packages and special equipment that can be ordered, the occurrence of such fluctuations must be factored into the configuration process and the choice of packages and special equipment.

³Permitted number of people with 3-point belts The weight of the passengers is calculated at a nominal 75 kg per seat, whereas the weight of the driver, which was already taken into account in the weight in the ready-to-drive state, must be deducted. In the case of a vehicle with four belt-restrained seats, the weight of the passengers is therefore 225 kg (3 x 75 kg).

⁴Maximum weights for packages and special equipment The maximum weights for packages and special equipment represent a value calculated for each floor plan with which we have restricted the weights for the packages and special equipment that can be ordered from the factory. This is intended to ensure that the legally prescribed minimum payload is complied with after the vehicle is shipped from the factory. If the configuration process leads to the upper limit for this defined by the manufacturer being exceeded as a result of the choice of packages and special equipment, you can only continue with the configuration process if you de-select packages, special equipment or belt-restrained seats or choose to increase the vehicle's load capacity. Otherwise, you will not be able to continue the configuration or order the configured vehicle. Please note that the calculation of the maximum weights for packages and special equipment also takes into account the special equipment features of the selected country variation / the selected special model.

⁵Fresh water tank size (l) Please note that the capacity of the fresh water tank is significantly reduced in the drive position. If the payload of the individual vehicle is sufficient, it can be filled to its full capacity.

All-inclusive

Whether it be ample storage space, weather protection thanks to a body made from GRP material, winter resistance and underfloor heating comfort thanks to heated double floors, insurance advantages or generous guarantees – we've thought of everything so that you can enjoy your holiday worry-free.

”

Quality and progress are hugely important at Eura Mobil.



Sealed Structure

The Eura Mobil principle of seal-vouched quality: A fully protected structure is built from a fully bonded, seamlessly sealed chassis with corrosion-resistant materials in the floor panel, walls and roof.



Withstands winter

To make the feel-good experience on trips and holiday independence perfect, all Eura Mobil motorhomes offer winter-proof on-board technology that is installed in a space-saving manner in the end-to-end double floor construction.



Fibreglass body

The GRP body makes Eura Mobil motorhomes the especially lightweight representatives of their class. GRP components offer the best long-term quality by providing for optimal protection against mechanical, chemical and weather-related influences.



Furniture construction

Did you know? The furniture of a large A-class model alone comprises almost 1,000 parts. This complex task calls for the furniture of our motorhomes to be designed using state-of-the-art CAD workstations.



Double floor

To offer you every kind of freedom, all Eura Mobil motorhomes are suitable for use all year round and specially equipped for the "great escape".



Sleeping comfort

The comfortable beds and mattresses in your Eura Mobil are the product of our careful development work and your personal choice.



Kitchens

With the exclusive kitchens from Eura Mobil, you can also free yourself from the rigours of set mealtimes: Why not have breakfast on the beach again, or perhaps enjoy lunch in the mountains ...



Wellness

When days are full of adventure, new discoveries and new experiences, evenings are ideal for retreating into an oasis of calm in your motorhome. For relaxation and recuperation, for refreshment and enjoyment.



Profila T "Freestyle"

Feature highlights


- Mercedes Sprinter 317 CDI
- "Freestyle" furniture and feature configuration (with, among other things, new lightweight components in the kitchen, bathroom, doors and cupboards and cabinets)
- 80 Ah lithium battery
- Body with model-specific GRP panels
- ALDE hot water heating
- Al-Ko low frame in weight-optimised special version
- 19.5-cm high heated double floor with floor storage compartments
- Elegant roof transition between driver's cab and body
- "Sun Roof" panoramic roof window, insulated and adjustable (optional)
- Large rear garage thanks to rear lowering with fully insulated underbody trough (726 EF)
- Winter-proof according to EN 1646-2
- Wood-free walls with continuous insulation (rot-proof)
- Furniture architecture in "Chalet Rustico" design (3-year guarantee)
- Bonded and all-round-sealed body composite made of hail-protected glass-fibre reinforced plastic (GRP) featuring Eura Mobil Sealed Structure Technology
- 10-year leak guarantee (up to 150,000 km)
- Water tanks heated and insulated in the double floor or in heated trough
- Electrically controlled waste water tank drainage
- Central technology compartment
- Noise-insulated window roller blinds (Seitz comfort roller blinds)
- Ambient lighting
- Illuminated entrance area with space for a TV of up to 32"
- Kitchen base unit with pull-outs
- Worktop illuminated from underneath for illumination of the kitchen pull-outs
- Comfort rain shower with back-lit shower column (depending on floor plan)
- USB port for charging mobile devices
- Seitz frame windows flush with the outer wall
- Body door with window and waste bin
- Mini-Heki skylight over rear bed
- 16" wheels
- Exterior lighting over body door
- 230 V power socket in washroom
- Front passenger airbag

**Exclusive chassis**

Mercedes Sprinter with AL-KO special frame as a basis for dynamic and comfortable handling

**Spacious room layout**

Both floor plans feature a face-to-face seating group, a spacious bathroom with a separate shower, large beds and plenty of storage space

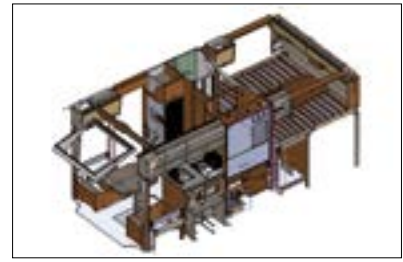**Perfect body-mass index**

Innovative material mix for the body and the furniture design results in a higher payload

Excellent open-area comfort in the 3.5 t class

Thanks to its exclusive chassis-body combination, the new "Freestyle", with its length of approximately 7.50 metres, presents itself as a well-built and weight-optimised comfort tourer that offers dynamic driving properties for 2 to 4 people.

”

A tailor-made balance between comfort and dynamic performance



A spacious room layout and a refined natural look are made possible even in the 3.5 t class thanks to the Freestyle features



▼ Example floor plan: PT 726 EF "Natural Heritage"



Stylish atmosphere in the "Freestyle" bathroom.

Profila T Mercedes "Freestyle" – Feature packages

Optional feature packages

Freestyle package	
Optional for: PROFILA T MERCEDES"FREESTYLE"	
Electrically adjustable heated exterior mirrors	"Freestyle" exterior
Steering wheel adjustable in height and angle	Body door with 2-point locking and central locking system
Leather steering wheel	"Sun Roof" adjustable panoramic plastic roof
Chrome-plated radiator grille	Electric roof fan
Distronic active distance assistant	Midi-Heki skylight
Heat-insulating glass with band filter	Manual dimming system for driver's cab
Traffic sign assistant	Door mosquito screen
TEMPMATIC semi-automatic air conditioning	Pre-cabling for solar power system
17" aluminium rims	High beam assistant
Captain's chair seats	Fog lights with cornering lights
Silver paintwork	

Freestyle Plus package	
Optional for: PROFILA T MERCEDES"FREESTYLE"	
Multi-function exterior socket	
External shower (cold/warm)	
External gas socket on passenger side	
Exclusive rear design	

Profila T "Freestyle" – Technical specifications



NEW

PT 726 EF "Freestyle"

Total length:	7.44 m
Total width:	2.32 m
Weight class:	3.5 t
Number of seats:	4
Sleeping areas:	2/4 (optional)

- + Comfort seating group with two-person sofas positioned opposite each other
- + Single beds in the rear
- + Large rear garage
- + Rear bathroom with separate shower
- + Washroom as separate dressing room variably closable on both sides with sliding doors



NEW

PT 726 QF "Freestyle"

Total length:	7.61 m
Total width:	2.32 m
Weight class:	3.5 t
Number of seats:	4
Sleeping areas:	2 (4) (optional)

- + Comfort seating group with two-person sofas positioned opposite each other
- + Central queen bed in the rear
- + Bed with adjustable headboard and linen compartment
- + Large rear garage
- + Washroom variably closable on both sides with sliding doors

PT 726 EF "Freestyle"

PT 726 QF "Freestyle"

Base vehicle

		MB Sprinter 315 CDI	MB Sprinter 315 CDI
Engine model, Euro VI		170 HP	170 HP
Chassis		AL-KO chassis	AL-KO chassis
Fuel tank	l	60 L diesel + 22 L AdBlue	60 L diesel + 22 L AdBlue

Dimensions and weights

Double floor height	cm	19.5	19.5
Load volume in the rear storage area	l	3,000	1,500
Size of storage door at the rear	cm	80x115	80 x 115
Wheelbase	m	4.15	4.15
Tyres		225/75 R16C	225/75 R16C
Technically permissible overall weight ¹⁾	kg	3,500	3,500
Weight in ready-to-drive state ²⁾	kg	3,033 (2,881 – 3,185)	3,042 (2,890 – 3,194)
Maximum weights for packages and special equipment ⁴⁾	kg	82	71
Trailer load, braked*	kg	1,800 / 2,000	1,800 / 2,000
Total length	m	7.44	7.61
Total width	m	2.32	2.32
Overall height	m	2.92	2.92
Standing height	m	1.98	1.98
Dimensions of front side seating group	cm	85 x 60	85 x 60
Bed conversion of the seating group**	cm	200 x 85	200 x 85
Dimensions of rear bed(s)	cm	2 x 203 x 83	190 x 147
Dimension of longitudinal bench	cm	85 x 60	85 x 60
Sleeping areas		2/4 (optional)	2/4 (optional)
Permitted number of people with 3-point belts ³⁾		4	4
Framed window with mosquito screen		4	4
Number of service flaps		2	2
Wall thickness of walls, roof, floor	mm	30 / 30 / 38	30 / 30 / 38
Fresh water / waste water tank ⁵⁾	l	138/88	138/88
Fresh water tank in the drive position ⁵⁾	l	10	10
Battery capacity	Ah	80 Lithium	80 Lithium
Refrigerator	l	142	142

* Note the weight of the vehicle/trailer combination

** Not in combination with 6430 table with chrome-plated table base

Technically permissible overall weight (kg)

The technically permissible overall weight in a laden state refers to the overall weight defined by the manufacturer that the vehicle may not exceed when in drive mode.

2The weight in the ready-to-drive state (kg)

The weight in the ready-to-drive state refers to the weight of the vehicle (with standard features according to the manufacturer's specifications) with its fuel tank filled to at least 90% of capacity and includes the weight of the driver (which is calculated at a nominal value of 75 kg), the weight of the fuel and fluids, the weight of the superstructure and the driver's cab, and the weight of the towing hitch and the tyre repair kit (to the extent these are present). This represents a calculated value that is subject to legally permissible fluctuations of up to ± 5% (see additional text in brackets). Since these legally permissible fluctuations impact the vehicle's payload and therefore also the weights of the packages and special equipment that can be ordered, the occurrence of such fluctuations must be factored into the configuration process and the choice of packages and special equipment.

3Permitted number of people with 3-point belts

The weight of the passengers is calculated at a nominal 75 kg per seat, whereas the weight of the driver, which was already taken into account in the weight in the ready-to-drive state, must be deducted. In the case of a vehicle with four belt-restrained seats, the weight of the passengers is therefore 225 kg (3 x 75 kg).

4Maximum weights for packages and special equipment

The maximum weights for packages and special equipment represent a value calculated for each floor plan with which we have restricted the weights for the packages and special equipment that can be ordered from the factory. This is intended to ensure that the legally prescribed minimum payload is complied with after the vehicle is shipped from the factory. If the configuration process leads to the upper limit for this defined by the manufacturer being exceeded as a result of the choice of packages and special equipment, you can only continue with the configuration process if you de-select packages, special equipment or belt-restrained seats or choose to increase the vehicle's load capacity. Otherwise, you will not be able to continue the configuration or order the configured vehicle. Please note that the calculation of the maximum weights for packages and special equipment also takes into account the special equipment features of the selected country variation / the selected special model.

5Fresh water tank size (l)

Please note that the capacity of the fresh water tank is significantly reduced in the drive position. If the payload of the individual vehicle is sufficient, it can be filled to its full capacity.



Contura

Feature highlights

- Mercedes Sprinter 415 CDI
- Starlight Dome panoramic glass roof with smart-lift and soft-close function (optional)
- 19.5-cm high heated double floor
- Storage space expansion through floor compartments and lowered side storage compartments (depending on floor plan)
- Single-piece GRP rear wall, shaped three-dimensionally
- LED direction-indicating dynamic turn signals at the rear
- LED tail lights
- AL-KO low-frame chassis with up to 4.5 t perm. total weight
- ALDE hot water heating
- Lounge sofa with back cushions and seat box cover
- 177-litre refrigerator with 35-litre freezer compartment
- Kitchen with two-part chopping board as sink cover
- Spring arm fitting or retractable water tap
- Fresh and waste water tank frost-protected in heated double floor
- Drainage valves, insulated and heated in the central service compartment
- Electrically controlled waste water tank drainage
- Large rear garages thanks to rear lowering with fully insulated underbody trough
- Winter-proof according to EN 1646-2
- Wood-free walls with continuous insulation (rot-proof)
- Robust furniture with aluminium profile reinforcements (3-year guarantee)
- Bonded and all-round-sealed body composite made of hail-protected glass-fibre reinforced plastic (GRP) featuring Eura Mobil Sealed Structure Technology
- 10-year leak guarantee (up to 150,000 km)
- Front-wheel drive
- 150 HP engine
- More headroom in the driver's cab thanks to specially shaped roof cut-out
- Extensive and voice-controlled assistance systems (MBUX) Safety systems
- Noise-insulated window roller blinds
- Dimmable ambient lighting
- Illuminated entrance with storage facilities
- Kitchen base unit with pull-outs instead of doors
- Comfort rain shower with back-lit shower column (depending on floor plan)
- Shower grate in the washroom
- Single-bed floor plans with adjustable bed frame and conversion into a double bed
- USB port for charging mobile devices
- Anchor rail for rear garage
- Body door with window and waste bin
- Mini-Heki skylight over rear bed
- Headboard with ambient lighting



Starlight dome panoramic roof 20% larger surface area than a tilting roof window and 100% inspiration – thanks to the smart-lift and soft-close functions and a guaranteed box seat under a starlit sky. Simply lift with two fingers instead of cranking! In combination with the panorama glass in the hood, this guarantees a bright living area.



Wall unit storage compartments
The compartments under the wall units with indirect lighting are the perfect shelves for books, smartphones and other small items



Rear design
A three-dimensionally shaped rear wall made of one "cast", including LED direction-indicating dynamic turn signals, shows the class of the Contura from afar.

Welcome to the starry side of life.

Luxury low-profile model with sophisticated interior and exclusive features.
Available on Mercedes Sprinter with extensive comfort and safety assistance systems.



Travel relaxed and enjoy the five-star surroundings.



▼ Example floor plan: C 766 EF



The plus points in the interior include: A perfectly sized roof cut-out for maximum headroom, fine furniture with a high-gloss finish, super-comfortable "face-to-face" seating group with folding table, stylish upholstery with fine decorative stitching.

Contura – Floor plans and technical specifications



C 766 EB

Total length:	7.84 m
Total width:	2.32 m
Weight class:	4.5 t
Number of seats:	4
Sleeping areas:	2 (4)

- + Single beds in the rear
- + Large rear garage
- + Rear bathroom with separate shower
- + Wardrobe pull-out
- + Washroom as separate dressing room variably closable on both sides with doors
- + Ergonomically designed corner kitchen with 177-litre refrigerator in individual arrangement
- + Comfortable L-shaped seat bench with single seat on the passenger side



C 766 EF

Total length:	7.84 m
Total width:	2.32 m
Weight class:	4.5 t
Number of seats:	4
Sleeping areas:	4

- + Comfort seating group with two-person sofas positioned opposite each other
- + Table with folding top, height adjustable
- + Single beds in the rear
- + Large rear garage
- + Rear bathroom with separate shower
- + Wardrobe pull-out
- + Washroom as separate dressing room variably closable on both sides with doors
- + Ergonomically designed corner kitchen with 177-litre refrigerator in individual arrangement
- + Kitchen with retractable tap and foldable worktop extension

C 766 EB

C 766 EF

Base vehicle

MB Sprinter 415 CDI

MB Sprinter 415 CDI

Engine model, Euro VI	103 kW (150 HP)	103 kW (150 HP)
Engine models (optional)	125 kW (170 HP)	125 kW (170 HP)
Chassis	AL-KO chassis	AL-KO chassis
Fuel tank	65 L diesel + 22 L AdBlue	65 L diesel + 22 L AdBlue

Dimensions and weights

Double floor height	cm	19.5	19.5
Load volume in the rear storage area	l	3,000	3,000
Size of storage door at the rear	cm	2 x 85 x 115	2 x 85 x 115
Wheelbase	m	4.45	4.45
Tyres		225/75 R16C	225/75 R16C
Technically permissible overall weight ¹⁾	kg	4,500	4,500
Weight in ready-to-drive state ²⁾	kg	3,430 (3,259 - 3,602)	3,334 (3,167 - 3,501)
Maximum weights for packages and special equipment ⁴⁾	kg	675	772
Trailer load, braked*	kg	2,000	2,000
Total length	m	7.84	7.84
Total width	m	2.32	2.32
Overall height	m	2.92	2.92
Standing height	m	1.98	1.98
Dimensions of front side seating group	cm	115 x 105	100 x 65
Bed conversion of the seating group**	cm	100 x 190	90 x 200
Dimensions of rear bed(s)	cm	195 x 80 / 200 x 80	195 x 80 / 200 x 80
Dimension of longitudinal bench	cm	62 x 65	100 x 65
Sleeping areas		2 (4)	2 (4)
Permitted number of people with 3-point belts ³⁾		4	4
Number of Isofix		-	2
Framed window with mosquito screen		3	3
Number of service flaps		4	4
Wall thickness of walls, roof, floor	mm	30 / 30 / 38	30 / 30 / 38
Fresh water / waste water tank ⁵⁾	l	140/88	138/88
Fresh water tank in the drive position ⁵⁾	l	10	10
Battery capacity	Ah	80 Gel	80 Gel
Refrigerator	l	177	177

* Note the weight of the vehicle/trailer combination

** Not in combination with 6430 table with chrome-plated table base

Contura – Feature packages

Optional feature packages

Luminary package

Optional for the: CONTURA

Bumpers & attachment parts in vehicle colour	Inductive charging station
Electric exterior mirrors	Traffic sign assistant
17" aluminium rims	Distronic active distance assistant
Driver's cab comfort seats (Contura)	Adjustable panoramic roof hood
Chrome-plated radiator grille	Exterior paintwork obsidian black
170 HP engine (surcharge compared to 150 HP)	Body door with 2-point locking and central locking system
92-litre tank	Starlight dome
Heat-insulating glass with band filter	Electric roof fan
Carbon exterior design	Manual dimming system for driver's cab
Hinged lids for storage compartments	Door mosquito screen
Climatronic automatic air conditioning	Pre-cabling for solar power system
Dashboard charging package	Extractor hood
Leather steering wheel	Smartphone integration

Luminary Plus package (only in combination with Luminary package)

Optional for the: CONTURA

Carpet in the driver's cab	Insulated curtain
Multi-function exterior socket	Lithium battery
External shower (cold/warm)	Truma DuoControl with remote display incl. de-icer and crash sensor
External gas socket on passenger side	Canopy

Driving Assistance package

Optional for the: CONTURA

High beam assistant
Fog lights
LED high performance headlights

¹Technically permissible overall weight (kg) The technically permissible overall weight in a laden state refers to the overall weight defined by the manufacturer that the vehicle may not exceed when in drive mode.

²The weight in the ready-to-drive state (kg) The weight in the ready-to-drive state refers to the weight of the vehicle (with standard features according to the manufacturer's specifications) with its fuel tank filled to at least 90% of capacity and includes the weight of the driver (which is calculated at a nominal value of 75 kg), the weight of the fuel and fluids, the weight of the superstructure and the driver's cab, and the weight of the towing hitch and the tyre repair kit (to the extent these are present). This represents a calculated value that is subject to legally permissible fluctuations of up to ± 5% (see additional text in brackets). Since these legally permissible fluctuations impact the vehicle's payload and therefore also the weights of the packages and special equipment that can be ordered, the occurrence of such fluctuations must be factored into the configuration process and the choice of packages and special equipment.

³Permitted number of people with 3-point belts The weight of the passengers is calculated at a nominal 75 kg per seat, whereas the weight of the driver, which was already taken into account in the weight in the ready-to-drive state, must be deducted. In the case of a vehicle with four belt-restrained seats, the weight of the passengers is therefore 225 kg (3 x 75 kg).

⁴Maximum weights for packages and special equipment The maximum weights for packages and special equipment represent a value calculated for each floor plan with which we have restricted the weights for the packages and special equipment that can be ordered from the factory. This is intended to ensure that the legally prescribed minimum payload is complied with after the vehicle is shipped from the factory. If the configuration process leads to the upper limit for this defined by the manufacturer being exceeded as a result of the choice of packages and special equipment, you can only continue with the configuration process if you de-select packages, special equipment or belt-restrained seats or choose to increase the vehicle's load capacity. Otherwise, you will not be able to continue the configuration or order the configured vehicle. Please note that the calculation of the maximum weights for packages and special equipment also takes into account the special equipment features of the selected country variation / the selected special model.

⁵Fresh water tank size (l) Please note that the capacity of the fresh water tank is significantly reduced in the drive position. If the payload of the individual vehicle is sufficient, it can be filled to its full capacity.

Low-profile – Standard features

	PROFILA T	PROFILA RS	PROFILA T MERCEDES	PROFILA T "FREESTYLE"	CONTURA
CHASSIS					
140 HP engine, Euro 6E, AE	S	S	-	-	-
150 HP engine, Euro VI	-	-	S	170 HP	S
CCS wide track low-slung frame (1,980 mm gauge)	S	S	-	-	-
ALKO low-slung frame chassis	-	-	S	S	S
ABS	S	S	S	S	S
Manual air conditioning	S	S	S	S	S
Frame extension	S	S	S	S	S
Driver / passenger airbag	S	S	S	S	S
Electric window lifters, driver's cab central locking system	S	S	S	S	S
Fix & Go breakdown kit	S	S	S	S	S
Daytime running lights	S	S	S	S	S
16" wheels	S	S	S	S	S
ESP including Traction+ and hill descent control	S	S	-	-	-
ASR, EBD and ESP	-	-	S	S	S
Electric parking brake	S	S	S	S	S
MBUX (without navigation)	-	-	S	S	S
Automatic transmission	-	-	S	S	S
DRIVER'S CAB					
GRP hood, insulated, with large storage compartments	S	S	S	S	S
Stylish fenders, wide designs	S	S	S	S	S
Protective covers in the superstructure – upholstery for the driver and passenger seat	S	S	S	S	S
Storage closets in the driver's cab, visually integrated into the living area	-	-	-	-	S
Curved roof with elegant transition to the superstructure	-	S	-	-	-
GRP roof compartment with integrated lift-up bed	-	S	-	-	-
SUPERSTRUCTURE					
Lightweight construction double floor throughout, insulated and heated	S	S	S	S	S
Aluminium profile without cold bridges for floor-wall joint	S	S	S	S	S
Floor hatches with folding handle	S	S	S	S	S
Lightweight construction floor panel with aluminium inlay	S	S	S	S	S
Wood-free GRP walls	S	S	S	S	S
GRP double floor	S	S	S	S	S
PVC floor covering with footstep sound insulation	S	S	S	S	S
Roof edge profile made from powder-coated aluminium with joint sealing	S	S	S	S	S
Mini Heki skylight roof hood over front section	S	S	S	S	S
Sturdy chassis side skirts made from powder-coated aluminium	S	S	S	S	S
Roof, wall, flooring made from GRP, fully insulated	S	S	S	S	S
Wall thickness of walls/roof/floor: 30/30/38mm	S	S	S	S	S

	PROFILA T	PROFILA RS	PROFILA T MERCEDES	PROFILA T "FREESTYLE"	CONTURA
Isofix, 2 x in driving direction	S (EF/QF models only)	S (EF/QF models only)	S (EF/QF models only)	S (EF/QF models only)	S (EF models only)
Isofix, 1 x in driving direction	S (675 SB, 695 EB, 720 EB)	S (675 SB, 695 EB, 720 EB)	S (726 EB, 696 EB)	-	EB only
Integrated double access step, insulated	S	S	-	-	-
Anti-slip surface on garage floor	S	S	S	-	S
Electric access step	-	-	S	S	S
Trumatic Combi 4 heating (for vehicles up to 7 metres in length)	S/-	S/-	-	-	-
Alde hot water heating for models from 7.01m length	S/-	S/-	S	S	S
Seitz framed window with mosquito screen flush with the external wall	S	S	S	S	S
Service flaps with double seal, insulated inlay and rotary-knob locks	S	S	S	S	S
Single key for entire superstructure	S	S	S	S	S
Noise insulation for wall unit doors	S	S	S	S	S
Large LED tail lights in Integra design	S	S	S	S	-
Big LED tail lights with dynamic turn signals with direction indicators	-	-	-	-	S
Fully moulded rear made of GRP	-	-	-	-	S
Diffuser elements in black gel coat integrated into single-piece rear section	-	-	-	-	S
Additional, lowered side and floor storage compartments (depending on floor plan)	-	-	S	S	S
Compartment shelves in the upper floor with access from the interior	S	S	S	S	-
Exterior lighting over the body door	S	S	S	S	S
Extra-wide body door with window and waste bin	S	S	S	S	S
Roof compartment for ceiling-flush lift-up bed	-	S	-	-	-
Lightweight upper floor	S	S	S	S	S
Double-moulded GRP sandwich roof	S	S	S	S	S
Garage lowering system with insulated well	S	S	S	S	S
LIVING AREA					
"Chalet Rustico" interior	S	S	S	S	-
"Natural Heritage" interior	-	-	O	-	-
"Navarra" interior	-	-	-	-	S
Upholstered fabric: Como or Dara	S	S	S	S	S
Spacious sofa with longitudinal seat on passenger side	S	S	S	S	S
Table with 360° turning and sliding fixture	S	S	S	S	S
Two-tone furniture décor	S	S	S	S	S
Wall unit doors with solid spring closures	S	S	S	S	S
Wall units with aluminium profile reinforcements	-	-	-	-	S
Wall units with high-gloss coating and chrome appliques	-	-	-	-	S

Low-profile – Standard features

S = Standard **P** = Package content
O = Optional **-** = Not possible

	PROFILA T	PROFILA RS	PROFILA T MERCEDES	PROFILA T "FREESTYLE"	CONTURA
Wall units with storage compartments, indirect illumination and rear ventilation	-	-	-	-	S
Entrance area with illuminated handle and handy storage compartments	S	S	S	S	S
Rear storage spaces with anchor bars, straps and storage boxes	-	-	-	-	S
Ambient lighting	S	S	S	S	S
Living environment with decorative elements	S	S	S	S	S
Mechanical lift-up bed, integrated into the ceiling	-	S	S	S	-
Mini Heki skylight over rear bed	S	S	S	S	S
Mini Heki skylight over lift-up bed	-	S	-	-	-
Lounge sofa with back cushions and seat chest trim	-	-	-	-	S
High-quality multi-zone upholstery for living area seats	-	-	-	-	S
Bed headboard with chrome appliques and ambient lighting	-	-	-	-	S

KITCHEN

Flow-Line design kitchen with ergonomically shaped worktop	-	-	-	-	S
Flowing transition from the kitchen front to the sofa on models with corner kitchen	S	S	S	S	S
Curved kitchen front	-	-	-	-	S
140 l to 160 l refrigerator (depending on floor plan)	S	S	S	S	S
Hob with electric ignition, glass cover and large work surface, number of burners	2	2	2	2	3
Pull-outs with self-closing mechanism and soft stop, metal roller runners	S	S	S	S	S
Divided deep wall units with slide guards	S	S	S	S	S
Colour-accentuated wall units	S	S	S	S	S
Extra-wide drawer	S	S	S	S	S
Chrome-plated tap	-	-	-	-	S
Water tap with swivel non-drip outlet (EF/QF models with retractable water tap)	S	S	S	S	S
Worktop with indirect illumination for pull-outs	-	-	-	-	S
Mineral sink with two-part chopping board as sink cover	-	-	-	-	S
Door with reed grass inlay (depending on floor plan)	-	-	-	-	S

WASHROOM

Centre washroom w. integr. shower room (660 EB, 696 EB)	S	S	S	-	-
Rear washroom with integrated shower cubicle (675 SB)	S	S	-	-	-
Separate shower (720, 726, 766)	S	S	S	S	S
Storage closet and mirror	S	S	S	S	S
Large roller-mounted tank for cassette WC	S	S	S	S	S
230V power socket	S	S	S	S	S

	PROFILA T	PROFILA RS	PROFILA T MERCEDES	PROFILA T "FREESTYLE"	CONTURA
Bench toilet with folding wooden bench (depending on floor plan)	S	S	S	S	S
Bathroom with separate shower (C 766 EB/EF/QB, PT/PRS 720 EB/EF/QF, 726 EB/EF, QF)	S	S	S	S	S
Shower wall in slate look, with wall heating and reed grass inlay (C 766 EB/EF/QB, PT/PRS 720 EB/EF)	S	S	S	S	S
Washbasin made from mineral material	-	-	-	-	S

WATER INSTALLATION

Fresh water system made from Hartflex plastic	S	S	S	S	S
Fixed pipe system for waste water	S	S	S	S	S
140 l insulated and heated fresh water tank in the double floor	S	S	-	-	-
Insulated and heated fresh and waste water tanks in the double floor*	-	-	S	S	S
Central service compartment with access to the water drainage taps	S (EF only)	S (EF only)	S (EF only)	S (EF only)	S
100 l waste water tank in insulated and heated floor trough	S	S	-	-	-
Electrically operated waste water tank emptying at the push of a button	S	S	S	S	S
Fittings with ceramic cartridges	S	S	S	S	S
Siphons to prevent odours	S	S	S	S	S
Pressurised water pump	S	S	S	S	S
2 drainage valves for fresh water system	S	S	S	S	S
Drain valves insulated and heated	S	S	S	S	S

ELECTRICAL INSTALLATION

Electrical distributor panel easily accessible under the passenger seat	S	S	-	-	-
80 Ah gel battery	S	S	S	Lithium	S
On-board control panel with separate displays for water, battery and charging voltage	S	S	S	S	S
LED reading spotlights	S	-	S	S	S
Light switch system with household logic system	S	S	S	S	S
Ceiling lights with double function light and/or LED ambience	S	S	S	S	-
Number of 230 V power sockets: 3	S	S	S	S	S
Number of 12 V power sockets: 1	S	S	S	S	S
Number of USB ports: 3	S	S	S	S	S
21 A charger	S	S	S	S	S
LED ambient lighting, dimmable and programmable	-	-	-	-	S
LED function lights in the centre of the ceiling and in the lateral ceiling struts	-	-	-	-	S

Low-profile – Special features

		PROFILA T						PROFILA RS						PROFILA T MERCEDES				PROFILA T FREESTYLE		CONTURA MERCEDES		Weight difference in kg	"RRP price (€) incl. 19% VAT"
		PT 660 EB	PT 675 SB	PT 695 EB	PT 720 EB	PT 720 EF	PT 720 QF	PRS 675 SB	PRS 695 EB	PRS 695 HB	PRS 720 EB	PRS 720 EF	PRS 720 QF	PT 696 EB	PT 726 EB	PT 726 EF	PT 726 QF	PT 726 EF FREE	PT 726 QF FREE	C 766 EB	C 766 EF		
PACKAGES – FEATURE PACKAGES																							
PSM01-26	Profila T Fiat Mondial package	0	0	0	0	0	0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	63	3,590
PSM02-26	Profila RS Mondial package	-	-	-	-	-	-	0	0	0	0	0	0	-	-	-	-	-	-	-	-	40	3,590
PSM03-26	PT Truma Mondial Plus package	0	0	0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	0	5,000
PSM04-26	PT Alde Mondial Plus package	-	-	-	0	0	0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-1	5,000
PSM05-26	PRS Truma Mondial Plus package	-	-	-	-	-	-	0	0	0	-	-	-	-	-	-	-	-	-	-	-	0	5,000
PSM06-26	PRS Alde Mondial Plus package	-	-	-	-	-	-	-	-	-	0	0	0	-	-	-	-	-	-	-	-	-1	5,000
PSM17-26	Profila T Mercedes-Benz GSR2 Mondial package	-	-	-	-	-	-	-	-	-	-	-	-	0	0	0	0	-	-	-	-	71	4,990
PSM18-26	Profila T Mercedes-Benz GSR2 Mondial Plus package	-	-	-	-	-	-	-	-	-	-	-	-	0	0	0	0	-	-	-	-	-8	9,990
PSM19-26	Profila T Mercedes-Benz 696 GSR2 Mondial S package	-	-	-	-	-	-	-	-	-	-	-	-	0	-	-	-	-	-	-	-	71	4,890
PSM20-26	Profila T Mercedes-Benz 726 GSR2 Mondial S package	-	-	-	-	-	-	-	-	-	-	-	-	-	0	0	0	-	-	-	-	74	4,890
PSM15-26	Freestyle package	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	0	0	-	-	64	6,490
PSM16-26	Freestyle Plus package	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	0	0	-	-	4	1,390
2871-26	Mercedes-Benz Driving Assistance package	-	-	-	-	-	-	-	-	-	-	-	-	0	0	0	0	0	0	0	0	0	1,990
2870-26	Fiat Driving Assistance package	0	0	0	0	0	0	0	0	0	0	0	0	-	-	-	-	-	-	-	-	0	2,790
CHASSIS OPTION – ENGINE																							
2112-26	180 HP Fiat engine (AP 140)	0	0	0	0	0	0	0	0	0	0	0	0	-	-	-	-	-	-	-	-	0	3,510
2121-26	170 HP Mercedes-Benz engine	-	-	-	-	-	-	-	-	-	-	-	-	0	0	0	0	S	S	0	0	0	2,700
2123-26	150 HP Mercedes-Benz engine	-	-	-	-	-	-	-	-	-	-	-	-	S	S	S	S	-	-	S	S	0	0
2160-26	140 HP Fiat engine	S	S	S	S	S	S	S	S	S	S	S	S	-	-	-	-	-	-	-	-	0	0
CHASSIS OPTION – SUPERIMPOSED LOAD																							
2324-26	Increase of tot. mass to 3.65t	0	0	0	0	0	0	0	0	0	0	0	0	-	-	-	-	-	-	-	-	0	460
2329-26	Increase of tot. mass to 4.5t	-	-	-	-	-	-	-	-	-	-	-	-	0	0	0	0	-	-	-	-	15	990
2330-26	Red of tot. mass to 3.5 t	0	0	0	0	0	0	0	0	0	0	0	0	-	-	-	-	-	-	-	-	0	460
2358-26	Reinforced front axle springs	0	0	0	0	0	0	0	0	0	0	0	0	-	-	-	-	-	-	-	-	0	990
CHASSIS OPTION – OTHER OPTIONS																							
2132-26	9G-Tronic automatic transmission Mercedes-Benz	-	-	-	-	-	-	-	-	-	-	-	-	S	S	S	S	S	S	S	S	0	0
2133-26	Fiat automatic transmission in combination with a light chassis	0	0	0	0	0	0	0	0	0	0	0	0	-	-	-	-	-	-	-	-	60	3,690
2136-26	Fiat automatic transmission in combination with a Maxi chassis	0	0	0	0	0	0	0	0	0	0	0	0	-	-	-	-	-	-	-	-	20	3,690
2311-26	Maxi chassis 4.25t	0	0	0	0	0	-	0	0	0	0	0	0	-	-	-	-	-	-	-	-	40	1,990
2313-26	Maxi chassis 4.4t	0	0	0	0	0	0	0	0	0	0	0	0	-	-	-	-	-	-	-	-	40	1,990
2372-26	Fuel tank, 92 litre	-	-	-	-	-	-	-	-	-	-	-	-	0	0	0	0	-	-	0	0	22	620
2373-26	Fuel tank, 60 litre	S	S	S	S	S	S	S	S	S	S	S	S	-	-	-	-	-	-	-	-	0	0
2374-26	90-litre fuel tank (Fiat 2 series)	0	0	0	0	0	0	0	0	0	0	0	0	-	-	-	-	-	-	-	-	25	290
2890-26	Right-hand drive chassis	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	3,790
EXTERIOR DESIGN – PAINTWORK																							
2421-26	Paintwork obsidian black	-	-	-	-	-	-	-	-	-	-	-	-	0	0	0	0	0	0	0	0	0	2,090
2424-26	Uni black paintwork MB	-	-	-	-	-	-	-	-	-	-	-	-	0	0	0	0	0	0	-	-	0	1,200
5451-26	Carbon external décor	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	0	0	2	1,190
5452-26	"Freestyle" external décor	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	0	0	-	-	0	590

Low-profile – Special features

		PROFILA T						PROFILA RS						PROFILA T MERCEDES				PROFILA T FREESTYLE		CONTURA MERCEDES		Weight difference in kg	"RRP price (€) incl. 19% VAT"
		PT 660 EB	PT 675 SB	PT 695 EB	PT 720 EB	PT 720 EF	PT 720 QF	PRS 675 SB	PRS 695 EB	PRS 695 HB	PRS 720 EB	PRS 720 EF	PRS 720 QF	PT 696 EB	PT 726 EB	PT 726 EF	PT 726 QF	PT 726 EF FREE	PT 726 QF FREE	C 766 EB	C 766 EF		
SUPERSTRUCTURE OPTION – EXTERIOR																							
2581-26	Superstructure door with central locking	O	O	O	O	O	O	O	O	O	O	O	O	S	S	S	S	S	S	S	S	2	520
2834-26	Exclusive rear design	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	0	1,190
5111-26	Rear comfort supports	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	-	-	O	O	8	690
5122-26	Trailer tow hitch	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	-	-	O	O	35	2,490
5412-26	Multi-function socket	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	2	390
5423-26	Underfloor camera for electrical tank emptying	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	O	O	1	1,230
5441-26	External shower (cold/warm)	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	1	350
5512-26	Window in toilet room	-	O	-	S	S	S	O	-	-	S	S	S	-	S	S	S	S	S	S	S	4	410
5521-26	"Sunroof" panoramic glass roof	O	O	O	O	O	O	O	O	O	O	O	O	-	-	-	-	-	-	-	-	25	1,490
5522-26	Starlight Dome panor.ma roof w. smart lift & soft close functions	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	S	S	30	2,520
5523-26	Adjustable roof hood	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	S	S	0	0
5524-26	"Sun Roof" panoramic roof window, insulated and adjustable	-	-	-	-	-	-	-	-	-	-	-	-	O	O	O	O	O	O	-	-	7	1,350
5534-26	Electric roof fan	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	S	S	6	350
5535-26	Tilting skylight roof hood (Heki)	O	O	O	O	O	O	-	-	-	-	-	-	O	O	O	O	-	-	-	-	23	1,420
5576-26	Mosquito screen for the body door	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	S	S	5	440
6656-26	Garage door service flap	S	-	S	S	S	S	-	S	S	S	S	S	S	S	S	S	S	S	S	S	4	690
SUPERSTRUCTURE OPTION – INTERIOR																							
3541-26	Comfort seats	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	O	O	14	1,690
3613-26	All-round insulation in the driver's cab	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	-	-	O	O	5	620
3671-26	Carpet in the driver's cab	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	-	-	O	O	2	150
3680-26	Driver's cab dimming system	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	-	-	O	O	7	790
3884-26	Integra/Contura on SB bedspread	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	O	O	2	550
3885-26	Bedspread on QB/DB	-	O	-	-	-	O	O	-	O	-	-	O	-	-	-	O	-	-	-	-	2	550
3886-26	EB bedspread	O	-	O	O	O	-	-	O	-	O	O	-	O	O	O	-	-	-	-	-	2	550
6213-26	Rear mattress removed	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	-	-	O	O	0	0
6224-26	Additional bed for 2 people (conversion of seating group)	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	11	770
6225-26	Child's bed in the cab	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	-	-	O	O	10	290
6236-26	Electr. adjust. lift-up bed for 2 people	-	-	-	-	-	-	O	O	O	O	O	O	-	-	-	-	-	-	-	-	8	990
6237-26	Manually adjustable lift-up bed	-	-	-	-	-	-	S	S	S	S	S	S	O	O	O	O	-	-	-	-	39	990
6354-26	Seat: Fifth seat	-	O	O	O	-	-	O	O	O	O	-	-	-	-	-	-	-	-	-	-	13	990
6356-26	4th seat on driver's side	-	-	-	-	-	-	-	-	-	-	-	-	-	-	O	O	S	S	-	-	26	990
6357-26	Additional seat opposite the direction of travel	-	O	O	O	-	-	O	O	O	O	-	-	-	-	-	-	-	-	-	-	0	990
6430-26	Table with chrome-plated table base	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	S	S	2	420
6432-26	Table with lowerable table base	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	O	O	-	-	0	490
7812-26	Ambient lighting	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	8	620
SUPERSTRUCTURE OPTION – BIKE CARRIER																							
5143-26	Bicycle carrier for 2 bicycles or 2 E-bikes (up to 60kg)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	O	O	9	650
5146-26	Bike carrier extension kit 4-way	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	-	-	O	O	2	170
5147-26	Bike carrier for 2 bikes	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	-	-	-	-	13	650
5148-26	Lowerable E-bike carrier	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	-	-	-	-	16	1,860

S = Standard feature

O = Optional feature at extra charge

P = Optional package feature

- = Not possible

Low-profile – Special features

		PROFILA T						PROFILA RS						PROFILA T MERCEDES				PROFILA T FREESTYLE		CONTURA MERCEDES		Weight difference in kg	"RRP price (€) incl. 19% VAT"
		PT 660 EB	PT 675 SB	PT 695 EB	PT 720 EB	PT 720 EF	PT 720 QF	PRS 675 SB	PRS 695 EB	PRS 695 HB	PRS 720 EB	PRS 720 EF	PRS 720 QF	PT 696 EB	PT 726 EB	PT 726 EF	PT 726 QF	PT 726 EF FREE	PT 726 QF FREE	C 766 EB	C 766 EF		
SUPERSTRUCTURE OPTION – CANOPIES																							
5243-26	4 m canopy	O	O	O	-	-	-	O	O	O	-	-	-	O	-	-	-	-	-	-	-	33	1,670
5244-26	4.5 m canopy	-	-	-	O	O	O	-	-	-	O	O	O	-	O	O	O	-	-	-	-	36	1,910
5245-26	5 m canopy	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	O	O	42	2,090
SUPERSTRUCTURE OPTION – HEATING																							
3617-26	Driver's cab underfloor heating (heated floor mat/Alde htg.)	-	-	-	O	O	O	-	-	-	O	O	O	O	O	O	O	-	-	O	O	4	1,190
7220-26	Warm air heating	S	S	S	-	-	-	S	S	S	-	-	-	-	-	-	-	-	-	-	-	0	0
7227-26	Hot water heating - Alde	-	-	-	S	S	S	-	-	-	S	S	S	S	S	S	S	S	S	S	S	0	0
7228-26	Combi 6 E heating	O	O	O	-	-	-	O	O	O	-	-	-	-	-	-	-	-	-	-	-	1	790
7510-26	Autonomous E-bike charger	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	-	-	O	O	3	3,730
SUPERSTRUCTURE OPTION – KITCHEN																							
7230-26	Extractor hood	O	O	O	O	O	O	O	O	O	O	-	-	O	O	O	O	-	-	S	S	3	580
7238-26	Oven	-	O	-	O	O	O	O	-	O	O	O	O	-	O	O	O	-	-	O	O	15	1,400
7255-26	Large refrigerator	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	18	1,400
SUPERSTRUCTURE OPTION – TECHNICAL SERVICES																							
5221-26	Roof-mounted air-conditioning system, 230 V	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	-	-	O	O	35	3,290
5223-26	Roof-mounted aircon system 230 V (surch. comp. to Mondial)	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	-	-	-	-	35	3,290
7321-26	Lithium battery (1x)	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	S	S	O	O	-13	3,300
7324-26	Lithium battery (2x)	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	-	-	O	O	18	2,990
7327-26	2nd gel battery - 80 Ah	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	-	-	O	O	27	600
7341-26	Pre-cabing for solar power system	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	2	350
7512-26	External gas socket	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	1	330
7516-26	Dual-control CS with de-icer	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	-	-	S	S	11	570
7655-26	Waste water tank, insulated and heated	S	S	S	S	S	S	S	S	S	S	S	S	-	-	-	-	-	-	-	-	9	870
SUPERSTRUCTURE OPTION – FABRICS																							
6111-26	Protective covers in structured upholstery fabric for the driver and passenger seat	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	4	410
6113-26	"Milano" upholstery fabric	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	0	590
6129-26	"Glendale" upholstery	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	-	0	990
6132-26	"Dara" upholstery fabric	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O		
6135-26	"Bergamo" upholstery fabric	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	-	-	0	590
6136-26	"Pisa" upholstery fabric	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	0	590
6137-26	"Leather beige" upholstery fabric	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	O	O	2	2,900
6138-26	"Leather grey" upholstery fabric	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	O	O	2	2,900
6153-26	"Como" upholstery fabric	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	0	0
6192-26	"Maka" décor	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	0	0
6193-26	"Lasca" décor	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	0	0
6194-26	"Rana" décor	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	0	0
6195-26	"Evono" décor	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	O	-	-	0	0

S = Standard feature

O = Optional feature at extra charge

P = Optional package feature

- = Not possible

Low-profile – Special features

		PROFILA T						PROFILA RS						PROFILA T MERCEDES				PROFILA T FREESTYLE				CONTURA MERCEDES		Weight difference in kg	"RRP price (€) incl. 19% VAT"
		PT 660 EB	PT 675 SB	PT 695 EB	PT 720 EB	PT 720 EF	PT 720 QF	PRS 675 SB	PRS 695 EB	PRS 695 HB	PRS 720 EB	PRS 720 EF	PRS 720 QF	PT 696 EB	PT 726 EB	PT 726 EF	PT 726 QF	PT 726 EF FREE	PT 726 QF FREE	C 766 EB	C 766 EF				
SUPERSTRUCTURE OPTION – MULTIMEDIA																									
3215-26	Loudspeakers (2) in the superstructure	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	-	-	-	-	4	490		
3237-26	Moniceiver with rear-view camera	0	0	0	0	0	0	0	0	0	0	0	0	-	-	-	-	-	-	-	-	1	1,490		
3238-26	Naviceiver w. rear-view camera	0	0	0	0	0	0	0	0	0	0	0	0	-	-	-	-	-	-	-	-	1	2,630		
3241-26	Sound system	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	0	0	5	1,260		
3439-26	Flat screen wall bracket in front area	-	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	750		
3441-26	Flat screen wall bracket in rear area	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	0	-	1	750		
3460-26	Flat screen pull-out in front area	0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	4	750		
SUPERSTRUCTURE OPTION – FURNITURE DÉCOR																									
6475-26	"Chalet" furniture décor	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	S	-	-	0	0		
6480-26	"Navarra" furniture décor	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	S	S	0	0		
6481-26	"Natural Vintage" furniture décor	-	-	-	-	-	-	-	-	-	-	-	-	0	0	0	0	-	-	-	-	0	0		
SUPERSTRUCTURE OPTIONS – OTHER																									
9813-26	Reduction of permit by 1 person	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	-	-	0	0	0	0		
9814-26	Reduction of permit by 2 persons	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	-	-	0	0	0	0		
9815-26	Reduction of permit by 3 persons	-	0	0	0	-	-	0	0	0	0	-	-	-	-	-	-	-	-	0	0	0	0		
9816-26	Reduction of permit by 4 persons	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	0	0	0	0		
MANDATORY																									
9009	Gas safety certificate, COC documents or vehicle paperwork, TÜV approval and pre-carriage	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	490		
A 80	Transfer costs	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1.690		

Try out and configure

Suitable for every taste.

Which upholstery colour, which interior and which features meet your needs? Take a look around and configure your personal motorhome directly online.



All information at a glance

Click here for more information on features, upholstery, interiors and more.



Motorhome configurator

Click here to choose one of our models and customise it in line with your personal preferences.



Xtura

Feature highlights

- Mercedes Sprinter with all-wheel drive
- Superstructure concept for long-distance travel and slopes
- Off-road and long-distance travel equipment
- All-season performance
- Electrical self-sufficiency for up to 30 days (depending on use)
- Body with raised floor clearance and optimised slope angle
- Modern interior offering superb travel comfort
- Torsional stability and resistance to weathering and chemical influences
- Thermal insulation without cold bridges / long-lasting
- AT tyres and Delta wheels (optional)
- Roof rack system for cargo (optional)
- Exterior lighting (optional)
- ALDE heating technology for hot water and hot water underfloor heating
- "VICTRON" power supply system
- All on-board functions are integrated into the GARMIN EmpirBus™ system
- GARMIN Tread Overland (optional)
- Winter-proof according to EN 1646-2
- Wood-free walls with continuous insulation (rot-proof)
- Rear axle with 3cm additional spring
- New furniture architecture in "Chalet Rustico" design (3-year guarantee)
- Bonded and all-round-sealed body composite made of hail-protected glass-fibre reinforced plastic (GRP) featuring Eura Mobil Sealed Structure Technology
- 10-year leak guarantee (up to 150,000 km)
- Water tanks heated and insulated
- Electrically controlled waste water tank drainage
- Noise-insulated window roller blinds (Seitz comfort roller blinds)
- Ambient lighting
- Illuminated entrance area with space for a TV of up to 32"
- Kitchen base unit with double-latched pull-outs
- Worktop illuminated from underneath for illumination of the kitchen pull-outs
- Washroom with swivel wall for integrated shower room
- Single-bed floor plan with adjustable bed frame and pull-out for conversion into a double bed
- USB port for charging mobile devices
- Anchor rail for rear garage
- Seitz frame windows flush with the outer wall
- Body door with window and waste bin
- Mini-Heki skylight over rear bed
- LED exterior lighting over body door
- 230 V power socket in washroom
- Manual air conditioning system in the driver's cab



Gas/induction cooking



Felt pockets



Chassis slope angle

Go your own way!

With the new Xtura, you can discover practically endless possibilities for turning leisure time into mobile freedom. The vehicle's 4x4 drive system ensures reliable acceleration, even in adverse road conditions. With its optional all-road tyres with an excellent grip, as well as a torsion-resistant superstructure, the Xtura is also able to conquer difficult terrain off the beaten track.

”

Inside the Xtura, you take your own world with you on your journey.



Xtura – Floor plan

XT 686 EF

Total length:	6.88 m
Total width:	2.20 m
Weight class:	4.1 t
Number of seats:	3
Sleeping areas:	2 (4)

- + Single beds in the rear
- + Large rear garage
- + Face-to-face seating group
- + Gas/induction hob
- + Kitchen base unit with double-latched pull-outs
- + Centre washroom with swivel wall for integrated shower room
- + Underfloor heating
- + Bus-controlled on-board systems



Xtura – Technical specifications

XT 686 EF

Base vehicle

MB Sprinter 419 CDI

Engine model, Euro VI	140 kW (190 HP)
Chassis	Mercedes Sprinter 4x4
Fuel tank	65 L diesel + 22 L AdBlue

Dimensions and weights

Load volume in the rear storage area	l	2,700
Size of storage door at the rear	cm	80 x 105
Wheelbase	m	3665
Tyres		225/75 R16C (265/60 R18C)
Technically permissible overall weight ¹⁾	kg	4,100 kg
Weight in ready-to-drive state ²⁾	kg	3,336 (3,169 – 3,503)
Maximum weights for packages and special equipment ⁴⁾	kg	465
Trailer load, braked*	kg	2,000
Total length	m	6.88
Total width	m	2.20
Overall height	m	3.05
Standing height	m	1.98
Dimensions of front side seating group	cm	83 x 60
Bed conversion of the seating group	cm	Not specified
Dimensions of rear bed(s)	cm	196 x 80 / 195 x 80
Dimension of longitudinal bench	cm	40 x 60
Sleeping areas		2 (3) optional
Permitted number of people with 3-point belts ³⁾		3
Framed window with mosquito screen		4
Number of service flaps		3
Wall thickness of walls, roof, floor	mm	30 / 30 / 85
Fresh water / waste water tank ⁵⁾	l	145/105
Fresh water tank in the drive position ⁵⁾	l	10
Battery capacity	Ah	330 (lithium)
Refrigerator	l	146

* Note the weight of the vehicle/trailer combination

Xtura – Feature packages

Optional feature packages

Xperience line

Optional for: XTURA

Fuel tank, 92 litre
Electric roof fan
Midi-Heki
Mosquito screen for the body door
Pre-cabing for solar power system
Smartphone charging cradle
Distronic
Automatic air conditioning
Traffic sign assistant
Electric external mirrors
Smartphone integration
Hinged lids for storage compartments
BWS + B2 + seat heating
Heated windscreen
Seat heating

Overland line**

Optional for: XTURA

Tyres Delta rims + all-terrain tyres
Roof rack with solar panels
Rear wall support plate

Adventure line***

Optional for: XTURA

Garmin Tread all-terrain satnav
Folding solar module
Driver's cab underfloor heating

Driving Assistance package*

Optional for: XTURA

High beam assistant
Fog lights
LED headlights

* in conjunction with Xperience line

** in addition to Xperience line

*** in addition to Overland Line or Xperience Line

¹Technically permissible overall weight (kg) The technically permissible overall weight in a laden state refers to the overall weight defined by the manufacturer that the vehicle may not exceed when in drive mode.

²The weight in the ready-to-drive state (kg) The weight in the ready-to-drive state refers to the weight of the vehicle (with standard features according to the manufacturer's specifications) with its fuel tank filled to at least 90% of capacity and includes the weight of the driver (which is calculated at a nominal value of 75 kg), the weight of the fuel and fluids, the weight of the superstructure and the driver's cab, and the weight of the towing hitch and the tyre repair kit (to the extent these are present). This represents a calculated value that is subject to legally permissible fluctuations of up to $\pm 5\%$ (see additional text in brackets). Since these legally permissible fluctuations impact the vehicle's payload and therefore also the weights of the packages and special equipment that can be ordered, the occurrence of such fluctuations must be factored into the configuration process and the choice of packages and special equipment.

³Permitted number of people with 3-point belts The weight of the passengers is calculated at a nominal 75 kg per seat, whereas the weight of the driver, which was already taken into account in the weight in the ready-to-drive state, must be deducted. In the case of a vehicle with four belt-restrained seats, the weight of the passengers is therefore 225 kg (3 x 75 kg).

⁴Maximum weights for packages and special equipment The maximum weights for packages and special equipment represent a value calculated for each floor plan with which we have restricted the weights for the packages and special equipment that can be ordered from the factory. This is intended to ensure that the legally prescribed minimum payload is complied with after the vehicle is shipped from the factory. If the configuration process leads to the upper limit for this defined by the manufacturer being exceeded as a result of the choice of packages and special equipment, you can only continue with the configuration process if you de-select packages, special equipment or belt-restrained seats or choose to increase the vehicle's load capacity. Otherwise, you will not be able to continue the configuration or order the configured vehicle. Please note that the calculation of the maximum weights for packages and special equipment also takes into account the special equipment features of the selected country variation / the selected special model.

⁵Fresh water tank size (l) Please note that the capacity of the fresh water tank is significantly reduced in the drive position. If the payload of the individual vehicle is sufficient, it can be filled to its full capacity.



ORIGINAL ACCESSORIES FOR EURA MOBIL XTURA



Application example

Base plate with spare wheel holder and spare wheel in combination with a rear ladder on the rail and a canopy

In cooperation with various manufacturers of accessories, we have put together a programme of accessories for our Xtura all-rounder that can be used to accommodate your personal preferences and whose components can be installed by your authorised dealer.

The foundation for the various possibilities here are the base plate at the rear of the Xtura and the roof rail that are installed at the factory. Different types of equipment components can be mounted on the base plate and also removed and replaced as desired.

THE FACTORY INSTALLED COMPONENTS



Base plate (rear)

Various types of mounting holes in numerous locations make it possible to attach different transport carriers and holders to the base plate.



Roof rail,

shown here in combination with solar panels, a roof air conditioning system and a roof rack.

THE ACCESSORY COMPONENTS



2 roof storage boxes, mounted on the roof rack: The lockable and robust metal boxes with a moisture protection feature offer additional storage space outside the vehicle and can be accessed quickly using the rear ladder.



Base plate with **bike carrier** and rear ladder on the rail / back wall for up to three bikes.



Universal mount (here for levelling ramp) and **spare wheel holder.** Two stable bar supports and a central screw thread fastener reliably keep the spare wheel secure even when travelling on bumpy surfaces. Boxes, canisters and similar containers can be securely fastened to the universal mount.



Large rear storage box on a mount on the base plate in combination with a rear ladder and rail – waterproof and lockable.



Folding rear ladder, lockable (shown here with a Delta spare wheel mounted on a lockable spare wheel holder)



Surfboard holder with variable adjustment options on a universal carrier

Xtura – Standard features

	Xtura MERCEDES
CHASSIS	
Mercedes Sprinter, 190 HP	S
MB 9G-Tronic automatic transmission	S
Sequential all-wheel drive	S
ABS	S
Manual air conditioning	S
Frame extension	S
Driver / passenger airbag	S
Electric window lifters, driver's cab central locking system	S
Fix & Go breakdown kit	S
Daytime running lights	S
16" wheels	S
ASR, EBD and ESP	S
DRIVER'S CAB	
GRP hood, insulated, with large storage compartments	S
Stylish fenders, wide designs	S
Protective covers in the superstructure – upholstery for the driver and passenger seat	S
SUPERSTRUCTURE	
Floor throughout, insulated and heated	S
Aluminium profile without cold bridges for floor-wall joint	S
Floor panel with aluminium inlay	S
Wood-free GRP walls	S
PVC floor covering with footstep sound insulation	S
Roof edge profile made from powder-coated aluminium with joint sealing	S
Mini Heki skylight roof hood over front section	S
Roof, wall, flooring made from GRP, fully insulated	S
Sloping rear wall for optimised slope angle	S
Wall thickness of walls/roof/floor: 30/30/85mm	S
Isofix, 1 x in driving direction	S
Garage floor with chequer plate	S
Electric access step	S
Alde hot water heating	S
Seitz framed window with mosquito screen flush with the external wall	S
Service flaps with double seal, insulated inlay and rotary-knob locks	S
Single key for entire superstructure	S
Large LED tail lights in Integra line design	S
Additional, lowered side and floor storage compartments (depending on floor plan)	S
Exterior lighting over the body door	S
Extra-wide body door with window and waste bin	S
Double-moulded GRP sandwich roof	S
Garage lowering system with insulated well	S
LIVING ENVIRONMENT	
"Chalet Rustico" interior	S
Upholstery design: Trail	S
Sofa with longitudinal seat on passenger side	S
Table with 360° turning and sliding fixture, folding	S
Two-tone furniture décor	S
Wall unit doors with solid spring closures	S
Entrance area with illuminated handle	S
Rear storage compartments with anchor rails	S
Single beds	S
Swan neck lamps with USB ports in the sleeping area	S

	Xtura MERCEDES
Living environment with decorative elements	S
Mini Heki skylight over rear bed	S
Felt wall pockets	S
Felt-look window shades	S
Headboard with shelf	S
KITCHEN	
Kitchen with ergonomically shaped worktop	S
Refrigerator 146 l	S
Cooker with electric ignition, large work surface, number of gas/induction hobs	2/1
Pull-outs with self-closing mechanism and soft stop, metal roller runners	S
Base unit with double-latched pull-outs	S
Divided deep wall units with slide guards	S
Colour-accentuated wall units	S
Extra-wide drawer	S
Spice board	S
Compressor refrigerator	S
Water tap with swivel non-drip outlet	S
Worktop with indirect illumination for pull-outs	S
WASHROOM	
Centre washroom with swivel wall for integrated shower room	S
Storage closet and mirror	S
Large roller-mounted tank for cassette WC	S
230V power socket	S
Bench toilet	S
Swivel washbasin	S
WATER INSTALLATION	
Fresh water system made from Hartflex plastic	S
Fixed pipe system for waste water	S
145 l insulated and heated fresh water tank	S
Central service compartment with access to the water drainage taps	S
105 l waste water tank in insulated and heated floor trough	S
Electrically operated waste water tank emptying at the push of a button	S
Fittings with ceramic cartridges	S
Siphons to prevent odours	S
Pressurised water pump	S
2 drainage valves for fresh water system	S
Drain valves insulated and heated	S
ELECTRICAL INSTALLATION	
Easily accessible electrical distributor panel in the garage	S
330 Ah lithium battery	S
On-board control panel with separate displays for water, battery and charging voltage	S
LED reading spotlights	S
Light switch system with household logic system	S
Number of 230 V power sockets: 3	S
Number of 12 V power sockets: 1	S
Number of USB ports: 3	S
120 A charger	S
LED ambient lighting	S

S = Standard feature
O = Optional feature at extra charge
P = Optional package feature
– = Not possible

Xtura – Special features

			Weight difference in kg	RRP price (€) incl. 19% VAT				Weight difference in kg	RRP price (€) incl. 19% VAT
PACKAGES – FEATURE PACKAGES					7341-26	Pre-cabling for solar power system	O	2	350
PAD02-26	Adventure package	O	17	2,990	7512-26	External gas socket	O	1	330
POL01-26	Overland package	O	124	9,590	7516-26	Dual-control CS with de-icer	O	11	570
PXP03-26	Xperience package	O	57	7,290	7655-26	Waste water tank, insulated and heated	S	9	870
2871-26	Driving Assistance package MB XT	O	0	1,990					
CHASSIS OPTION – ENGINE					SUPERSTRUCTURE OPTION – TEXTILE FEATURES				
2124-26	190 HP Mercedes-Benz engine	S			6111-26	Protective covers in structured upholstery fabric for the driver and passenger seat	S	4	410
CHASSIS OPTION – OTHER OPTIONS					6130-26	"Trail" upholstery	S	0	0
2132-26	9G-Tronic automatic transmission Mercedes-Benz	S	0	0	6131-26	"Trail leather grey" upholstery	O	2	2,900
2372-26	Fuel tank, 92 litre	O	22	620	6133-26	"Trail leather beige" upholstery	O	2	2,900
2890-26	Right-hand drive chassis	O	0	3,790	6134-26	"Trail Glendale" upholstery	O	0	990
EXTERIOR DESIGN - PAINTING					6195-26	"Evono" décor	O	0	0
2901-26	Underbody protection plate – front and rear, level 1	O	N/A	N/A	SUPERSTRUCTURE OPTION - MULTIMEDIA				
2902-26	Underbody protection plate, level 2	O	N/A	N/A	3215-26	Loudspeakers (2) in the superstructure	O	4	490
EXTERIOR DESIGN - RIMS					3232-26	Garmin Tread Overland all-terrain satnav	O	3	1,990
2225-26	Tyres steel rims + BFG all-terrain tyres	O	N/A	N/A	3239-26	MBUX	S	0	0
2226-26	Tyres Delta rims + BFG all-terrain tyres	O	40	7,990	3439-26	Flat screen wall bracket in front area	O	1	750
SUPERSTRUCTURE OPTION – EXTERIOR					SUPERSTRUCTURE OPTION - FURTHER OPTIONS				
2581-26	Superstructure door with central locking	S	2	520	7270-26	Folding solar module	O	9	990
5111-26	Rear comfort supports	O	8	690	MANDATORY				
5122-26	Trailer tow hitch	O	35	2,490	9009	Gas safety certificate, COC document or vehicle paperwork, TÜV approval and pre-carriage	O	0	
5237-26	Left rear wall support plate incl. mounted ladder	O	0	2,150	A 80	Transfer costs	O	0	
5324-26	Roof rack with solar panels and work light	O	64	3,690					
5412-26	Multi-function socket	O	2	390	Xtura INDIVIDUAL ACCESSORIES				
5441-26	External shower (cold/warm)	O	1	350	– Installation at authorised dealer – Prices excluding installation				
5524-26	"Sun Roof" panoramic roof window, insulated and adjustable	S	7	1,350	Product description				
5534-26	Electric roof fan	O	6	350	Item no.				
5536-26	Midi-Heki	O	3	590	RRP/gross				
5576-26	Mosquito screen for the body door	O	5	440	Xtura Multi-Panel Rear Left (Base plate rear right)	E-2663633ET	2,150		
6656-26	Garage door service flap	S	4	690	Xtura Multi-Panel Rear Right (Base plate rear left)	E-2666396ET (Prod.: E-2666395) is only the plate. From model 2026 on, the inserts will be in all models.	2,150		
SUPERSTRUCTURE OPTION – INTERIOR					Xtura Multi-Panel Roof (Roof rack)	E-2663632ET	2,150		
3613-26	All-round insulation in the driver's cab	O	5	620	Xtura Roofbox S	75-12-010	1090		
3671-26	Carpet in the driver's cab	O	2	150	Xtura Cargo box S hinge left	75-12-011	1,190		
3680-26	Driver's cab dimming system	S	7	790	Xtura Cargo box S hinge right	75-12-019	1,190		
6213-26	Rear mattress removed	O	0	0	Xtura Cargo box M hinge left	75-12-012	1,690		
6220-26	Additional bed for 1 person (conversion of seating group)	O	6	650	Xtura Cargo box M hinge right	75-12-020	1,690		
6225-26	Child's bed in the cab	O	10	290	Xtura spare wheel carrier	E-2663603	690		
6357-26	Additional seat opposite the direction of travel	O	0	990	Xtura Bike Rack 2	75-12-013	2,490		
7812-26	Ambient lighting	S	8	620	Xtura Bike Rack Extension +1	75-12-015	1,190		
SUPERSTRUCTURE OPTION – CANOPIES					Universal carrier basket (basket + plate...)	75-12-017	900		
5243-26	4 m canopy	O	33	1,670	Universal carrier (SKI, boards, etc ...)	75-12-016	1,390		
SUPERSTRUCTURE OPTION – HEATING					Levelling ramp box incl. ARB levelling ramp	75-12-018	699		
3617-26	Driver's cab underfloor heating (heated floor mat/Alde htg.)	O	4	1,190	BG aluminium wheel – Xtura (mount is E-2663603)	E-2660764	1,590		
7226-26	Hot water heating – diesel	O	0	4,490	Set: Rear skid plate protection	N/A	599		
7227-26	Hot water heating – Alde	S	15	2,700	Set: Skid plate protection + additional lights	N/A	699		
SUPERSTRUCTURE OPTION – KITCHEN					Set: Engine protector	N/A	990		
7230-26	Extractor hood	O	3	580	Set: Protectors for trans. + diff. + tanks	N/A	1,890		
7238-26	Oven	O	15	1,400	Set: Rescue	N/A	2,790		
7255-26	Large refrigerator	S	18	1,400	Set: Recovery	N/A	3,490		
SUPERSTRUCTURE OPTION – TECHNICAL SERVICES									
5221-26	Roof-mounted air-conditioning system, 230 V	O	35	3,290					



Integra Line

Feature highlights

- Automotive design
- "Short Cabin" visibility concept with short front section for extra-wide field of vision
- Powerful LED main headlights (optional depending on equipment)
- LED tail lights
- Pilot's seats with arm rests and integrated seatbelts
- Electrically adjustable bus mirrors, heated
- Lift-up bed 193x 150 cm in the driver's cab with 78 cm headroom
- 11cm-high heated double floor with floor storage compartments
- Convenient bed access thanks to wide, lowerable lift-up bed
- Large rear garages thanks to rear lowering with fully insulated underbody trough
- Winter-proof according to EN 1646-2
- Wood-free walls with continuous insulation (rot-proof)
- Robust furniture with aluminium profile reinforcements (3-year guarantee)
- Bonded and all-round-sealed body composite made of hail-protected glass-fibre reinforced plastic (GRP) featuring Eura Mobil Sealed Structure Technology
- 10-year leak guarantee (up to 150,000 km)
- Water tanks heated and insulated in the double floor or in heated trough
- Electrically controlled waste water tank drainage
- Central technology compartment
- ALDE hot water heating
- Dashboard and door trims in carbon look
- Ambient lighting
- 16" wheels
- ESP
- Mini Heki skylight over front section and rear bed
- Reading lights and orientation light in the driver's cab
- Noise-insulated window roller blinds
- Illuminated entrance area with storage facilities
- Kitchen base unit with pull-outs
- Worktop illuminated from underneath for illumination of the kitchen pull-outs
- Sink cover with 2-part chopping board (depending on floor plan)
- Comfort rain shower with back-lit shower column (depending on floor plan)
- Shower grate in the washroom
- Single-bed floor plans with adjustable bed frame and pull-out for conversion into a double bed
- USB ports for charging mobile devices
- Anchor rail for rear garage
- Seitz frame windows flush with the outer wall



Rear garage

There's plenty of room for bulky luggage or bicycles underneath the bed in the lowered rear garage.



Practical box

On the passenger side in the driver's cab is a practical storage box for travel literature, chargers or other small items at hand. Naturally featuring Eura Mobil's typically stylish and stable characteristics in oak chalet finish.

The perfect choice!

The Integra Line represents the ideal combination of modern technology, attractive design and comfortable features. With its versatile range of layouts in the 7m class, it embodies a tailor-made premium motorhome with an excellent price-performance ratio, especially among the mid-size A-Class models.

”

In the living area, the fantastic spatial effect is inspirational.



▼ Example floor plan: IL 720 EF



The plus points in the interior include: A fantastic feeling of space despite a compact length, bathroom with huge, variable wardrobe, kitchen with hinged cover and retractable tap, swivel driver's cab seats with integrated seatbelt and arm rest.

Integra Line – Floor plans



IL 720 EB

Total length:	7.41 m
Total width:	2.32 m
Weight class:	3.5 t
Seats:	3 (4) (5) (optional)
Sleeping areas:	4 (6) (optional)

- + Single beds in the rear
- + Large rear garage
- + Rear bathroom with separate shower
- + Washroom as separate dressing room variably closable on both sides with sliding doors
- + Ergonomically designed corner kitchen with 142-litre refrigerator in individual arrangement
- + Comfortable L-shaped seat bench with single seat on the passenger side



IL 720 EF

Total length:	7.41 m
Total width:	2.32 m
Weight class:	3.5 t
Seats:	2 (4) (optional)
Sleeping areas:	4 (6) (optional)

- + Comfort seating group with two-person sofas positioned opposite each other
- + Table with folding top, height adjustable
- + Single beds in the rear
- + Large rear garage
- + Rear bathroom with separate shower
- + Washroom as separate dressing room variably closable on both sides with sliding doors
- + Kitchen with retractable tap and foldable worktop extension



IL 720 QF

Total length:	7.57 m
Total width:	2.32 m
Weight class:	3.5 t
Seats:	2 (4) (optional)
Sleeping areas:	4 (6) (optional)

- + Comfort seating group with two-person sofas positioned opposite each other
- + Table with folding top, height adjustable
- + Central queen bed in the rear
- + Bed with sliding slatted frame, adjustable headboard and linen compartment
- + 2 wardrobes
- + Large rear garage thanks to height-adjustable bed
- + Rear bathroom with separate shower
- + Washroom variably closable on both sides with sliding doors



IL 730 EF

Total length:	7.57 m
Total width:	2.32 m
Weight class:	3.5 t
Seats:	2 (4) (optional)
Sleeping areas:	4 (6) (optional)

- + Single beds with low entry height
- + Large storage spaces under the beds
- + Rear washroom across the entire width of the vehicle with separate shower
- + Bedroom and dressing room separated from living area with sliding door
- + Comfort seating group with two-person sofas positioned opposite each other
- + Table with folding top
- + Kitchen with retractable tap and foldable worktop extension

Integra Line – Packages

Optional feature packages

Mondial package

Optional for the: INTEGRA LINE

Electric parking brake	Manual blackout system
Steering wheel controls	Heki skylight roof hood
16" aluminium rims	Body door with 2-point locking and central locking system
Leather steering wheel and gearshift knob	Electric roof fan
Dashboard with chrome-plated air vents	Door mosquito screen
Moniceiver with rear-view camera	Pre-cabing for solar power system
Integra Line comfort seats incl. height adjustment and lumbar support	

Mondial Plus package (only in combination with Mondial package)

Optional for the: INTEGRA LINE

Automatic transmission	Carpet in the driver's cab
Chassis – Maxi 4.4t instead of 3.5t + (surcharge)	Multi-function exterior socket
180 HP engine	External shower (cold/warm)
90-litre fuel tank add-on	External gas socket on passenger side
Automatic air conditioning	Heat-insulating double glazing in the side windows
Inductive charging station	Elect. front blind blinds for windscreen
7" digital instrument panel	Lithium battery
Naviceiver w. rear-view camera	

Integra Line – Technical specifications



		IL 720 EB	IL 720 EF	IL 720 QF
Base vehicle		Fiat Ducato 16" / 3.5 t	Fiat Ducato 16" / 3.5 t	Fiat Ducato 16" / 3.5 t
Engine model, Euro 6d Final		103 kW (140 HP)	103 kW (140 HP)	103 kW (140 HP)
Engine models (optional)		130 kW (180 HP)	130 kW (180 HP)	130 kW (180 HP)
Chassis		Fiat CCS low-slung frame	Fiat CCS low-slung frame	Fiat CCS low-slung frame
Fuel tank	l	60 L diesel + 19 L Ad Blue	60 L diesel + 19 L Ad Blue	60 L diesel + 19 L Ad Blue
Dimensions and weights				
Double floor height	cm	11	11	11
Load volume in the rear storage area	l	3,000	3,000	1,500
Size of storage door at the rear	cm	80 x 115	80 x 115	80 x 115
Wheelbase	m	4.04	4.04	4.04
Tyres		225/75 R16C	225/75 R16C	225/75 R16C
Technically permissible overall weight ¹⁾	kg	3,500 // 4,250//4,400 (optional)	3,500 // 4,250//4,400 (optional)	3,500 // 4,250//4,400 (optional)
Weight in ready-to-drive state ²⁾	kg	3,193 (3,033 – 3,352)	3,227 (3,066 – 3,385)	3,263 (3,099 – 3,426)
Maximum weights for packages and special equipment ⁴⁾	kg	5	55	18
Trailer load, braked [*]	kg	2,000 // 1,800 // 1,750 (optional)	2,000 // 1,800 // 1,750 (optional)	2,000 // 1,800 // 1,750 (optional)
Total length	m	7.41	7.41	7.57
Total width	m	2.32	2.32	2.32
Overall height	m	2.88	2.88	2.88
Interior width	m	2.17	2.17	2.17
Standing height	m	1.98	1.98	1.98
Height above lift-up bed	cm	78	78	78
Dimensions of front side seating group	cm	115 x 105	100 x 65	100 x 65
Bed conversion of the seating group**	cm	200 x 115	200 x 100	200 x 100
Dimensions of rear bed	cm	2 x 203 x 84	2 x 203 x 83	190 x 147
Dimensions of lift-up bed	cm	193 x 150	193 x 150	193 x 150
Dimensions of longitudinal bench or rear seating group	cm	55 x 65	100 x 65	100 x 65
Sleeping areas		4 (6) optional	4 (6) optional	4 (6) optional
Permitted number of people with 3-point belts ³⁾		3 (4) (5) optional***	2 (4) optional***	2 (4) optional***
Number of Isofix		1	2	2
Framed window with mosquito screen		4	4	4
Number of service flaps		2	2	2
Wall thickness of walls, roof, floor	mm	30 / 30 / 38	30 / 30 / 38	30 / 30 / 38
Fresh water / waste water tank ⁵⁾	l	140/100	138/100	138/100
Fresh water tank in the drive position ⁵⁾	l	10	10	10
Battery capacity	Ah	80 Gel	80 Gel	80 Gel
Refrigerator	l	142	142	142

¹⁾Technically permissible overall weight (kg) The technically permissible overall weight in a laden state refers to the overall weight defined by the manufacturer that the vehicle may not exceed when in drive mode.

²⁾The weight in the ready-to-drive state (kg) The weight in the ready-to-drive state refers to the weight of the vehicle (with standard features according to the manufacturer's specifications) with its fuel tank filled to at least 90% of capacity and includes the weight of the driver (which is calculated at a nominal value of 75 kg), the weight of the fuel and fluids, the weight of the superstructure and the driver's cab, and the weight of the towing hitch and the tyre repair kit (to the extent these are present). This represents a calculated value that is subject to legally permissible fluctuations of up to ± 5% (see additional text in brackets). Since these legally permissible fluctuations impact the vehicle's payload and therefore also the weights of the packages and special equipment that can be ordered, the occurrence of such fluctuations must be factored into the configuration process and the choice of packages and special equipment.

³⁾Permitted number of people with 3-point belts The weight of the passengers is calculated at a nominal 75 kg per seat, whereas the weight of the driver, which was already taken into account in the weight in the ready-to-drive state, must be deducted. In the case of a vehicle with four belt-restrained seats, the weight of the passengers is therefore 225 kg (3 x 75 kg).

⁴⁾Maximum weights for packages and special equipment The maximum weights for packages and special equipment represent a value calculated for each floor plan with which we have

Integra Line – Technical specifications



IL 730 EF

Fiat Ducato 16" / 3.5 t

103 kW (140 HP)

130 kW (180 HP)

Fiat CCS low-slung frame

60 L diesel + 19 L Ad Blue

11

1,700

85 x 55

4.04

225/75 R16C

3,500 // 4,250//4,400 (optional)

3,239 (3,077 – 3,401)

42

2,000 // 1,800 // 1,750 (optional)

7.57

2.32

2.88

2.17

1.98

78

100 x 65

200 x 100

200 x 75, 197 x 75

193 x 150

100 x 65

4 (6) optional

2 (4) optional***

2

4

2

30 / 30 / 38

138/100

10

80 Gel

142



Find a Eura Mobil
dealer near you here!



* Note the weight of the vehicle/trailer combination

** Not in combination with 6430 table with chrome-plated table base

*** **Numbers in brackets only in combination with 2324

superimposed load to 3.65t or 2311/2313 Maxi chassis



More information

Click here for more information on floor plans, upholstery, interiors and more.



restricted the weights for the packages and special equipment that can be ordered from the factory. This is intended to ensure that the legally prescribed minimum payload is complied with after the vehicle is shipped from the factory. If the configuration process leads to the upper limit for this defined by the manufacturer being exceeded as a result of the choice of packages and special equipment, you can only continue with the configuration process if you de-select packages, special equipment or belt-restrained seats or choose to increase the vehicle's load capacity. Otherwise, you will not be able to continue the configuration or order the configured vehicle. Please note that the calculation of the maximum weights for packages and special equipment also takes into account the special equipment features of the selected country variation / the selected special model.

⁵Fresh water tank size (l) Please note that the capacity of the fresh water tank is significantly reduced in the drive position. If the payload of the individual vehicle is sufficient, it can be filled to its full capacity.



Integra Line **GT**

Feature highlights

- Mercedes Sprinter 415 CDI chassis
- Innovative cab geometry in accordance with the new GSR 2 standard
- Extensive safety and assistance system equipment
- Cameras for the latest assistance systems integrated into the windscreen and dashboard
- Sporty high-end RIM front section with dynamic highlighting of light brackets and air inlets
- Radiator with elegant matt metallic frame
- Body with mineral grey gel coat coating
- Bonnet and front mask with muscular bulges
- Extra deep special low frame for safe handling and maximum load volume
- 30cm high, heated double floor with floor storage compartments
- Standing height of 2.05m, external height only 2.98m
- Moisture-protected storage tray accessible from both sides and from above
- Liner storage flaps that open upwards
- Automotive design
- "Short Cabin" visibility concept with short front section for extra-wide field of vision
- Powerful LED double headlights
- LED tail lights
- Pilot's seats with arm rests and integrated seatbelts
- Electrically adjustable bus mirrors, heated
- Lift-up bed 193 x 150cm in the driver's cab with 78cm headroom
- Convenient bed access thanks to wide, lowerable lift-up bed
- Large rear garages thanks to rear lowering with fully insulated underbody trough
- Winter-proof according to EN 1646-2
- Wood-free walls with continuous insulation (rot-proof)
- Robust furniture with aluminium profile reinforcements (3-year guarantee)
- Bonded and all-round-sealed body composite made of hail-protected glass-fibre reinforced plastic (GRP) featuring Eura Mobil Sealed Structure Technology
- Water tanks heated and insulated in the double floor
- Electrically controlled waste water tank drainage
- Central technology compartment
- ALDE hot water heating
- Dashboard and door trims in carbon look
- Noise-insulated window roller blinds
- Illuminated entrance area with storage facilities
- Kitchen base unit with pull-outs
- Worktop illuminated from underneath for illumination of the kitchen pull-outs
- Comfort rain shower with back-lit shower column
- Single-bed floor plans with adjustable bed frame and pull-out for conversion into a double bed
- Anchor rail for rear garage

More compact than a liner ...

The new Integra Line GT defines its very own class in the A-Class segment. With a decidedly sporty design, and offering significant performance advantages over conventional premium A-Class vehicles on the one hand and significantly more compact dimensions compared to liners on the other hand, the GT sets its own individual standard of luxury and dynamic performance.

” The Gran Turismo in the premier class



Pure dynamism on the outside – noblesse inspired by nature on the inside.

... more than just an A-Class.

The dynamic, elegant design presents itself as the striking face of an athletic Gran Turismo, with an AL-KO STC special low frame that sets new performance attribute standards with a 30cm double floor, 2.05m standing height and an exclusive interior. With vehicle lengths at around the 7.50 metre mark, the GT offers handling that is as simple as it is superior, and in this manner it remains decidedly light-footed as compared to other A-Class vehicles.



More than just a highlight ahead of the rest



Storage tray is accessible from both sides and from the interior. For loading the integrated Euro boxes or the moisture-protected floor trough.



High-performance LED headlights illuminate the night.



Radiator grille with elegant metallic frame.



Liner storage flaps that open upwards for convenient loading and unloading.



Extra deep **special low frame** for safe handling and maximum load volume.



Modern **assistance and safety systems** for more comfort and safety.



Floor hatches allow access to the storage area in the double floor from the inside as well.



High-end RIM front section with dynamic highlighting of light brackets and air inlets.



Particularly large **load volume** thanks to double floor height of 30 cm.

Integra Line GT- Technical specifications

- + Comfort seating group with two-person sofas positioned opposite each other
- + Table with folding top, height adjustable
- + Single beds in the rear
- + Large rear garage
- + Rear bathroom with separate shower
- + Washroom as separate dressing room variably closable on both sides with sliding doors
- + Kitchen with retractable tap and foldable worktop extension



- + Comfort seating group with two-person sofas positioned opposite each other
- + Table with folding top, height adjustable
- + Central queen bed in the rear
- + Bed with sliding slatted frame, adjustable headboard and linen compartment
- + 2 wardrobes
- + Large rear garage thanks to height-adjustable bed
- + Rear bathroom with separate shower
- + Washroom variably closable on both sides with sliding doors



IL GT 726 EF

IL GT 726 QF

Base vehicle		MB Sprinter 415 CDI	MB Sprinter 415 CDI
Engine model, Euro VI		110 kW (150 HP)	110 kW (150 HP)
Engine models (optional)		125 kW (170 HP)	125 kW (170 HP)
Chassis		AL-KO STC special low frame chassis	AL-KO STC special low frame chassis
Fuel tank	l	60 L diesel + 22 L AdBlue	60 L diesel + 22 L AdBlue
Dimensions and weights			
Double floor height	cm	29.5	29.5
Load volume in the rear storage area	l	3,000	1,500
Size of storage door at the rear	cm	85 x 115	85 x 115
Wheelbase	m	4.11	4.11
Tyres		225/75 R16C	225/75 R16C
Technically permissible overall weight ¹⁾	kg	4,500	4,500
Weight in ready-to-drive state ²⁾	kg	3,391 (3,221- 3,561)	3,341 (3,174- 3,508)
Maximum weights for packages and special equipment ⁴⁾	kg	802	853
Trailer load, braked*	kg	2,000	2,000
Total length	m	7.47	7.65
Total width	m	2.32	2.32
Overall height	m	2.98	2.98
Standing height	m	2.05	2.05
Dimensions of front side seating group	cm	85 x 60	85 x 60
Bed conversion of the seating group	cm	200 x 86	200 x 86
Dimensions of rear bed(s)	cm	2 x 196 x 84	195 x 147
Dimensions of lift-up bed	cm	193 x 150	193 x 150
Dimension of longitudinal bench	cm	85 x 60	85 x 60
Sleeping areas		4	4
Permitted number of people with 3-point belts ³⁾		3 (4) optional	3 (4) optional
Framed window with mosquito screen		4	4
Number of service flaps		2	2
Wall thickness of walls, roof, floor	mm	30 / 30 / 38	30 / 30 / 38
Fresh water / waste water tank ⁵⁾	l	150/100	150/100
Fresh water tank in the drive position ⁵⁾	l	10	10
Battery capacity	Ah	80 Gel	80 Gel
Refrigerator	l	142	142

* Observe the permissible gross train weight

¹⁾Technically permissible overall weight (kg) The technically permissible overall weight in a laden state refers to the overall weight defined by the manufacturer that the vehicle may not exceed when in drive mode.

²⁾The weight in the ready-to-drive state (kg) The weight in the ready-to-drive state refers to the weight of the vehicle (with standard features according to the manufacturer's specifications) with its fuel tank filled to at least 90% of capacity and includes the weight of the driver (which is calculated at a nominal value of 75 kg), the weight of the fuel and fluids, the weight of the superstructure and the driver's cab, and the weight of the towing hitch and the tyre repair kit (to the extent these are present). This represents a calculated value that is subject to legally permissible fluctuations of up to ± 5% (see additional text in brackets). Since these legally permissible fluctuations impact the vehicle's payload and therefore also the weights of the packages and special equipment that can be ordered, the occurrence of such fluctuations must be factored into the configuration process and the choice of packages and special equipment.

³⁾Permitted number of people with 3-point belts The weight of the passengers is calculated at a nominal 75 kg per seat, whereas the weight of the driver, which was already taken into account in the weight in the ready-to-drive state, must be deducted. In the case of a vehicle with four belt-restrained seats, the weight of the passengers is therefore 225 kg (3 x 75 kg).

Integra Line GT– Packages

IL GT Mondial package

Optional for the: INTEGRA LINE GT

Leather steering wheel
 Smartphone integration
 17" aluminium rims
 170 HP engine
 DISTRONIC active distance assistant
 Dashboard charging package
 Storage for smartphones incl. wireless charging
 92-litre tank
 Electric bus mirrors, heated
 Integra Line GT comfort seats with seat heating
 Rear-view camera
 Body door with 2-point locking and central locking system
 LED upgrade for front lighting
 Electric roof fan
 Heki skylight roof hood
 Door mosquito screen
 Pre-cabling for solar power system

IL GT Mondial Plus package (only in combination with Mondial package)

Optional for the: INTEGRA LINE GT

Navigation software for MBUX
 Thermotronic automatic air conditioning
 Traffic sign assistant
 Heat-insulating double glazing (cab side windows)
 Electrically controlled front pleated blinds
 Carpet in the driver's cab
 Multi-function exterior socket
 External shower (cold/warm)
 External gas socket
 Lithium battery



⁴Maximum weights for packages and special equipment The maximum weights for packages and special equipment represent a value calculated for each floor plan with which we have restricted the weights for the packages and special equipment that can be ordered from the factory. This is intended to ensure that the legally prescribed minimum payload is complied with after the vehicle is shipped from the factory. If the configuration process leads to the upper limit for this defined by the manufacturer being exceeded as a result of the choice of packages and special equipment, you can only continue with the configuration process if you de-select packages, special equipment or belt-restrained seats or choose to increase the vehicle's load capacity. Otherwise, you will not be able to continue the configuration or order the configured vehicle. Please note that the calculation of the maximum weights for packages and special equipment also takes into account the special equipment features of the selected country variation / the selected special model.

⁵Fresh water tank size (l) Please note that the capacity of the fresh water tank is significantly reduced in the drive position. If the payload of the individual vehicle is sufficient, it can be filled to its full capacity.



Integra

Feature highlights

- Full LED headlights
- LED direction-indicating dynamic turn signals (rear)
- Single-piece fully moulded rear
- LED tail lights
- Automotive design with RIM components and galvanic chrome-plated elements
- Professional kitchen, with 9 drawers, ergonomically shaped with full features
- Spacious bathroom with rain shower and spa atmosphere
- Shower wall with slate look, wall heating and illuminated reed grass inlay
- Luxury bedroom with illuminated ceiling and chrome appliques
- Living area features exclusive lounge ambience
- Electrically controlled front blind
- Electrically controlled lift-up bed
- 19.5-cm high heated double floor
- Storage space expansion through floor compartments and lowered side storage compartments (depending on floor plan)
- AL-KO low-frame chassis with up to 5.5 t permissible total weight
- ALDE hot water heating
- Lounge sofa with back cushions, bolster and seat box cover
- 153-litre refrigerator with 29-litre freezer compartment
- Kitchen surface made of mineral material with two-part chopping board as sink cover
- Electric lift for coffee maker in lowerable glass display case
- Fresh and waste water tank frost-protected in heated double floor
- Drainage valves, insulated and heated in the central service compartment
- Electrically controlled waste water tank drainage
- Large rear garages thanks to rear lowering with fully insulated underbody trough
- Winter-proof according to EN 1646-2
- Wood-free walls with continuous insulation (rot-proof)
- Robust furniture with aluminium profile reinforcements (3-year guarantee)
- Bonded and all-round-sealed body composite made of hail-protected glass-fibre reinforced plastic (GRP) featuring Eura Mobil Sealed Structure Technology
- 10-year leak guarantee (up to 150,000 km)
- Body door with window and waste bin
- Mini-Heki skylight over rear bed
- Dashboard and door trims in carbon look
- Electrically adjustable bus mirrors, heated
- Ambient lighting



A shining example

LED headlights make a thrilling impression by creating a daylight-like atmosphere as they illuminate the road ahead. The static cornering lights provide support here in turns and curves.



Cargo capacity in line with your needs

The Integra 760 is available in an AL-KO two-axle or three-axle version. Those who are looking for easier handling should go with the two-axle configuration – but if you need to transport a lot of cargo, you should opt for the three-axle version.



Nice and easy

All you need to do is push a button to lower the electrically controlled lift-up bed (which can be reached easily via the seats) to a comfortable entry height.

A statement for more beautiful living.

The Integra is the luxury A-Class model with modern comfort and safety features that meet the highest demands with regard to interior ambience and functionality. Long-term travellers and globetrotters in particular will find the Integra, with its excellent year-round features, the perfect mobile home.

”

On the road with the Integra ... you certainly lead the way.



▼ Example floor plan: I 760 QF



The plus points in the interior include: Thrilling spaciousness and additional storage space with optional storage cabinets (instead of lift-up bed), lounge seating group with TV pull-out on the passenger side, pilot's seat with lumbar support, large table with divided top for easy passage through the room (I 760 EF/QF).

Integra – Floor plans



I 760 EF

Total length:	7.89 m
Total width:	2.32 m
Weight class:	4.5 / 5.5 t
Number of seats:	4
Sleeping areas:	4

- + Comfort seating group with two-person sofas positioned opposite each other
- + Table with folding top, height adjustable
- + Single beds in the rear with slatted frame and pull-out for conversion to a double bed
- + Large rear garage with anchor rail
- + Rear bathroom with separate shower
- + Wardrobe pull-out
- + Washroom as separate dressing room variably closable on both sides with doors
- + Ergonomically designed corner kitchen with 177-litre refrigerator in individual arrangement
- + Kitchen with retractable water tap and foldable worktop extension
- + Glass showcase in the entrance area
- + TV pull-out behind the seat bench



I 760 QF

Total length:	7.89 m
Total width:	2.32 m
Weight class:	4.5 / 5.5 t
Number of seats:	4
Sleeping areas:	4

- + Comfort seating group with two-person sofas positioned opposite each other
- + Table with folding top, height adjustable
- + Centrally positioned queen bed in the rear with linen compartment
- + Sliding bed slatted frame with adjustable headboard
- + Two wardrobes
- + Large rear garage thanks to bed height adjustment
- + Rear bathroom with separate shower
- + Washroom as separate dressing room variably closable on both sides with doors
- + Kitchen with retractable tap and foldable worktop extension
- + Glass showcase in the entrance area
- + TV pull-out behind the seat bench



I 890 EB

Total length:	8.99 m
Total width:	2.32 m
Weight class:	5.5 t
Seats:	4 (5) (optional)
Sleeping areas:	4 (6) (optional)

- + AL-KO 3-axle chassis
- + Spacious lounge seating group for up to 7 people
- + Single beds in the rear with slatted frame and pull-out for conversion to a double bed
- + Large rear garage with anchor rail
- + Rear bathroom with separate shower
- + Tall pull-out unit
- + Wardrobe pull-out
- + Washroom as separate dressing room variably closable on both sides with doors
- + Ergonomically designed professional kitchen with 153-litre refrigerator in individual arrangement
- + Comfortable L-shaped seat bench with sofa on the passenger side
- + Glass showcase in the entrance area
- + TV pull-out behind the seat bench



I 890 QB

Total length:	8.99 m
Total width:	2.32 m
Weight class:	5.5 t
Seats:	4 (5) (optional)
Sleeping areas:	4 (6) (optional)

- + AL-KO 3-axle chassis
- + Spacious lounge seating group for up to 7 people
- + Centrally positioned queen bed in the rear with linen compartment
- + Sliding bed slatted frame with adjustable headboard
- + Two wardrobes
- + Large rear garage thanks to bed height adjustment
- + Rear bathroom with separate shower
- + Tall pull-out unit
- + Washroom as separate dressing room variably closable on both sides with doors
- + Comfortable L-shaped seat bench with sofa on the passenger side
- + Glass showcase in the entrance area
- + TV pull-out behind the seat bench

Integra – Packages

Optional feature packages

Luminary package

Optional for the: INTEGRA

Steering wheel controls	Carpet in the driver's cab
16" aluminium rims	Carbon exterior design
Leather steering wheel and gearshift knob	Chrome elements at the front & rear
Automatic air conditioning	LED cornering lights
Inductive charging station	LED fog light
7" digital instrument panel	TV pull-out in the front
Driver's cab comfort seats (Integra)	TV wall bracket in the rear
Naviceiver w. rear-view camera	Organisation system for the rear garage
Pre-cabling for solar power system	Sound system

Luminary Plus package (only in combination with Luminary package)

Optional for the: INTEGRA

Multi-function exterior socket	Lithium battery
External shower (cold/warm)	6 m mechanical canopy
External gas socket on passenger side	Heatable windscreen
Heat-insulating double glazing in the side windows	Underfloor camera for electrical tank emptying




More information

Click here for more information on floor plans, upholstery, interiors and more.



Integra – Technical specifications

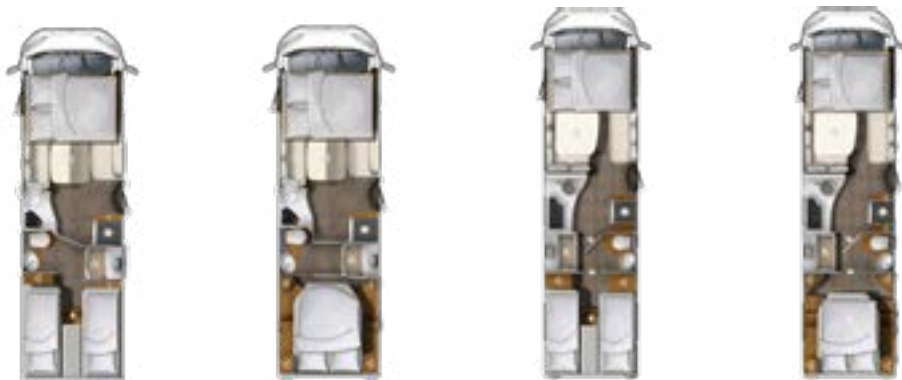

		I 760 EF	I 760 QF	I 890 EB	I 890 QB
Base vehicle		Fiat Ducato Maxi	Fiat Ducato Maxi	Fiat Ducato Maxi	Fiat Ducato Maxi
Engine models (optional)		130 kW (180 HP)	130 kW (180 HP)	130 kW (180 HP)	130 kW (180 HP)
Chassis		AL-KO low-frame chassis, 2-axle / 3-axle (optional)	AL-KO low-frame chassis, 2-axle / 3-axle (optional)	AL-KO low-frame chassis, 2-axle / 3-axle (optional)	AL-KO low-frame chassis, 2-axle / 3-axle (optional)
Fuel tank	l	90 L diesel + 19 L Ad Blue	90 L diesel + 19 L Ad Blue	90 L diesel + 19 L Ad Blue	90 L diesel + 19 L Ad Blue
Dimensions and weights					
Double floor height	cm	19.5	19.5	19.5	19.5
Load volume in the rear storage area	l	3,000	1,700	3,000	1,700
Size of storage door at the rear	cm	2 x 115 x 85	2 x 105 x 80	2 x 85 x 115	2 x 85 x 105
Wheelbase	m	4.45 // 4.04 + 0.8 (optional)	4.45 // 4.04 + 0.8 (optional)	4.5 + 0.8	4.5 + 0.8
Tyres		225/75 R16C	225/75 R16C	225/75 R16C	225/75 R16C
Technically permissible overall weight ¹⁾	kg	4,500 / 5,500 (optional)	4,500 / 5,500 (optional)	5,500	5,500
Weight in ready-to-drive state ²⁾	kg	3,664 (3,481- 3,848)	3,655 (3,472- 3,838)	4,106 (3,901- 4,312)	4,090 (3,885- 4,294)
Maximum weights for packages and special equipment ⁴⁾	kg	437	446	977	994
Trailer load, braked [*]	kg	1,890 / 1,600	1,890 / 1,600	1,600	1,600
Total length	m	7.89	7.89	8.99	8.99
Total width	m	2.32	2.32	2.32	2.32
Overall height	m	2.92	2.92	2.92	2.92
Standing height	m	1.98	1.98	1.98	1.98
Height above lift-up bed	cm	78	78	78	78
Dimensions of front side seating group	cm	115 x 65	115 x 65	160 x 105	160 x 105
Bed conversion of the seating group ^{**}	cm	190 x 100	190 x 100	130 x 200	130 x 200
Dimensions of rear bed(s)	cm	195 x 80 / 200 x 80	195 x 150	195 x 80 / 200 x 80	195 x 150
Dimensions of lift-up bed	cm	150 x 193	150 x 193	150 x 193	150 x 193
Dimensions of longitudinal bench or rear seating group	cm	100 x 60	100 x 60	135 x 65	135 x 65
Sleeping areas		4 (6) optional	4 (6) optional	4 (6) optional	4 (6) optional
Permitted number of people with 3-point belts ³⁾		4	4	4 (5) optional	4 (5) optional
Framed window with mosquito screen		4	4	4	4
Number of service flaps		4	4	4	4
Wall thickness of walls, roof, floor	mm	30 / 30 / 38	30 / 30 / 38	30 / 30 / 38	30 / 30 / 38
Fresh water / waste water tank ⁵⁾	l	140/100	140/100	140/100	140/100
Fresh water tank in the drive position ⁵⁾	l	10	10	10	10
Battery capacity	Ah	80 Gel	80 Gel	80 Gel	80 Gel
Refrigerator	l	177	177	153	153

* Note the weight of the vehicle/trailer combination

** Not in combination with 6430 table with chrome-plated table base

***2-axle

¹Technically permissible overall weight (kg) The technically permissible overall weight in a laden state refers to the overall weight defined by the manufacturer that the vehicle may not exceed when in drive mode.

²The weight in the ready-to-drive state (kg) The weight in the ready-to-drive state refers to the weight of the vehicle (with standard features according to the manufacturer's specifications) with its fuel tank filled to at least 90% of capacity and includes the weight of the driver (which is calculated at a nominal value of 75 kg), the weight of the fuel and fluids, the weight of the superstructure and the driver's cab, and the weight of the towing hitch and the tyre repair kit (to the extent these are present). This represents a calculated value that is subject to legally permissible fluctuations of up to ± 5% (see additional text in brackets). Since these legally permissible fluctuations impact the vehicle's payload and therefore also the weights of the packages and special equipment that can be ordered, the occurrence of such fluctuations must be factored into the configuration process and the choice of packages and special equipment.

³Permitted number of people with 3-point belts The weight of the passengers is calculated at a nominal 75 kg per seat, whereas the weight of the driver, which was already taken into account in the weight in the ready-to-drive state, must be deducted. In the case of a vehicle with four belt-restrained seats, the weight of the passengers is therefore 225 kg (3 x 75 kg).

⁴Maximum weights for packages and special equipment The maximum weights for packages and special equipment represent a value calculated for each floor plan with which we have

A-Class – Standard features

S = Standard **P** = Package content
O = Optional **-** = Not possible

	Integra Line	Integra Line GT	Integra
CHASSIS			
140 HP, Euro 6d final (150 hp)	S	S	-
180 HP engine, Euro VI (170 HP)	O	O	S
CCS wide track low-slung frame (1,980 mm gauge) with frame extension	S	S	-
AL-KO low-slung frame chassis	-	-	S
ABS	S	S	S
Driver / passenger airbag	S	S	S
Manual air conditioning	S	S	S
ESP including Traction+ and hill descent control	S	S	S
Cruise control	S	S	S
16" wheels	S	S	S
Fix & Go breakdown kit	S	S	S
Daytime running lights	S	S	-
LED daytime running lights	P	P	S
LED headlights	P	P	S
LED dipped beam	P	P	S
LED tail lights	S	S	S
LED direction-indicating dynamic turn signals (rear)	-	-	S
MBUX without navigation	S	S	S
Automatic transmission	S	S	S

DRIVER'S CAB

Protective covers in the superstructure – upholstery for the driver and passenger seat	S	S	S
Front mask made from moulded GRP piece	S	S	S
Exclusive lamp unit with integrated turn signal	S	S	S
Panoramic windscreen (for wide field of vision)	S	S	S
Eura Mobil "Short Cabin"	S	S	S
Short front section with integrated original Fiat crash protection	S	S	S
Short dashboard with wide viewing angle to the front	S	S	S
Wide-opening, narrow bonnet with direct access to windscreen wash and oil top-up nozzles	S	S	S
Electrically adjustable bus mirrors, heated	S	S	S
Dashboard and door trims in carbon look	-	-	S
Lift-up bed with 78 cm seat height	S	S	S
Electrically controlled lift-up bed	O	O	S
Storage closets under the lift-up bed	S	S	S
Ambient lighting below the lift-up bed	S	S	S
Mini Heki skylight over lift-up bed	S	S	S
Driver's door with large storage compartments	S	S	S
Electric control panel within easy reach in the covered compartment on the passenger side	S	S	-
Electric window raiser for the driver's door	S	S	S
Extensive noise insulation	S	S	S
Driver's cab with automotive design	S	S	S
GRP front mask with headlight housings in RIM technology	S	S	S
Navigation lights behind windscreen	-	-	S
Lowered radiator bridge for easy access to the engine compartment	S	S	S

	Integra Line	Integra Line GT	Integra
Seat heating	S	S	S
BWS	S	S	S
Bonnet with gas spring assistance	S	S	S
Diffuser elements in black gel coat integrated into single-piece front mask	-	-	S
Moulded parts under the lift-up bed for smooth optical transition to the living area	-	-	S
Pilot's seats with arm rests and integrated seatbelts	S	S	S
Driver's cab door with double locking and central remote locking	S	S	S
Sliding windows for passenger side	S	S	S
Concertina darkening system for driver's cab	O	O	S
Electrically controlled front pleated blinds	O	O	S
Sun visors with steplessly adjustable roller blinds, integrated into the headlining	-	-	S
Card compartment with handy hinged lid on the passenger side	S	S	S
Reading lights and orientation light in the driver's cab	S	S	S

SUPERSTRUCTURE

Lightweight construction double floor insulated and heated throughout	S	S	S
Aluminium profile without cold bridges for floor-wall joint	S	S	S
Lightweight construction floor panel with aluminium inlay	S	S	S
Insulated wheel arches	S	S	S
Wood-free GRP walls	S	S	S
Double floor GRP-coated	S	S	S
Roof, wall, flooring made from GRP, fully insulated	S	S	S
Wall thickness of walls/roof/floor: 30/30/38mm	S	S	S
Isobox, 2 x in driving direction	S (EF + QF models)	S (EF + QF models)	-
Isobox, 1 x in driving direction	S (except EF/QF models)	S (except EF/QF models)	S
Roof edge profile made from powder-coated aluminium with joint sealing	S	S	S
Sturdy chassis side skirts made from aluminium	S	S	S
Electrically actuated step	-	-	S
Integrated double access step, insulated	S	S	-
Alde hot water heating	S	S	S
Duo control with remote display, de-icer and crash sensor	O	O	S
Service flaps with double seal, insulated inlay and self-closing locks	S	S	S
Extra-wide body door with window and waste bin	S	S	S
Wall units with aluminium profile reinforcement	S	S	S
Warm air circulation in the double floor with underfloor heating effect	S	S	S
Exterior lighting over body door	S	S	S
Fresh and waste water tank in heated and insulated floor trough	S	S	-
Fresh and waste water tank in heated double floor	-	-	S
GRP rear wall with three-dimensional curving	S	S	S
Diffuser elements in black gel coat integrated into single-piece rear section	S	S	S

restricted the weights for the packages and special equipment that can be ordered from the factory. This is intended to ensure that the legally prescribed minimum payload is complied with after the vehicle is shipped from the factory. If the configuration process leads to the upper limit for this defined by the manufacturer being exceeded as a result of the choice of packages and special equipment, you can only continue with the configuration process if you de-select packages, special equipment or belt-restrained seats or choose to increase the vehicle's load capacity. Otherwise, you will not be able to continue the configuration or order the configured vehicle. Please note that the calculation of the maximum weights for packages and special equipment also takes into account the special equipment features of the selected country variation / the selected special model.

***Fresh water tank size (l)** Please note that the capacity of the fresh water tank is significantly reduced in the drive position. If the payload of the individual vehicle is sufficient, it can be filled to its full capacity.

A-Class – Standard features

S = Standard **P** = Package content
O = Optional **-** = Not possible

	Integra Line	Integra Line GT	Integra
Additional, lowered side and floor storage compartments (depending on floor plan)	S	S	S
Extra-wide body door with window and waste bin	S	S	S
Lightweight upper floor	S	S	S
Double-moulded GRP sandwich roof	S	S	S
Garage lowering system with insulated well	S	S	S
Diffuser elements in black gel coat integrated into single-piece rear section	-	-	S
Central service compartment with access to the water drainage taps	-	-	S
Additional, lowered side and floor storage compartments (depending on floor plan)	-	-	S
Garage doors on the driver and passenger side	S	S	S
Rear storage spaces with anchor bars, straps and storage boxes	-	-	S
Anti-slip surface on garage floor	S	S	S
Mosquito screen for the body door	P	P	S
Heki skylight roof hood over seating group	P	P	S
Mini Heki skylight over rear bed	S	S	S
Mini Heki skylight over front section	S	S	S
Insulated Seitz framed window with mosquito screen flush with the external wall	S	S	S
Window roller blinds with noise insulation	S	S	S
Carpeted floor in the superstructure	O	O	S
Garage lowering system with insulated well	S	S	S

LIVING AREA

"Chalet Rustico" interior	S	S	-
Navarra interior	-	-	S
Upholstered fabric: Como or Dara	S	S	S
Table with 360° turning and sliding fixture	S	S	-
Double-pedestal table (on I 890 EB and I 890 QB) with chrome-plated table legs and marble-look tabletop	-	-	S
Living area with decorative elements (and wall pockets)	S	S	S
Stable slatted frames, with underneath ventilation	S	S	S
Wall unit doors with solid spring closures	-	-	S
Noise insulation for wall unit doors	S	S	S
Ambient lighting	S	S	S
Central control panel unit behind cover plate above entrance door	-	-	S
Wall units with high-gloss coating and chrome appliqué	-	-	S
Wall units with storage compartments, indirect illumination and rear ventilation	-	-	S
Wall unit profile made from aluminium with integrated stop attenuation for furniture doors	S	S	S
Entrance area with illuminated handle and handy storage compartments	-	-	S
Wine cabinet with glass and wine bottle holders	-	-	S
Shoe compartment in the entrance area	-	-	S
Compartment shelves in the upper floor with access from the interior	S	S	S
Lounge sofa with back cushions and seat box cover	-	-	S
High-quality multi-zone upholstery for living area seats	-	-	S
High-quality headrests and neck padding on the seats with belts	-	-	S
Bed headboard with chrome appliques and ambient lighting	-	-	S
Rear bed in all QB models, height-adjustable	P	P	S

KITCHEN

138 l to 153 l refrigerator (depending on floor plan)	S	S	-
153/177 l refrigerator with 29/35 l freezer compartment	-	-	S
Hob with electric ignition, glass cover and large work surface; number of burners 2	S	S	-
Worktop-mounted 3-burner hob with two-part glass cover	-	-	S (1890 EB/ QB)
Drawers with metal roller runners	S	S	S
Extra-wide drawers with self-closing mechanism and soft-stop	S	S	-
7 pull-outs with self-closing mechanism and soft stop	-	-	S

	Integra Line	Integra Line GT	Integra
Water tap with swivel non-drip outlet	S	S	-
Chrome-plated tap with spring arm	-	-	S
Ergonomically shaped kitchen block	O	O	S
Worktop with indirect illumination for pull-outs	-	-	S
Oven	O	O	S
Extractor hood	O	O	S
Stainless steel sink with two-part chopping board as sink cover	-	-	S
Illuminated storage compartments with slate look	-	-	S
Electric lift for coffee maker in lowerable glass display case	-	-	S
Pull-out cloakroom at the transition to the washroom (depending on floor plan)	-	-	S
Door with reed grass inlay	-	-	S

WASHROOM

Separate shower IL 720 QF, IL 730 EF, IL 720 EB	S	S	-
Storage closet and mirror	S	S	-
Cassette toilet with large roller-mounted tank	S	S	S
230 V power sockets	S	S	S
Bathroom with separate shower cubicle on IL 720 EF, QF, I 760 EF, I 760 QF, I 890 EB and I 890 QB	S	S	S
Comfort rain shower with back-lit shower column (depending on floor plan)	S	S	S
Shower wall with slate look, wall heating and illuminated reed grass inlay	-	-	S
Toilet room with mirrored cabinet and base unit	S	S	S
Window in toilet room (layout-dependent)	O	O	S
Washbasin made from mineral material	-	-	S
Door to sleeping area on IL 720, 730, Integra	S	S	S

WATER INSTALLATION

Fresh water system made from Hartflex plastic	S	S	S
Fixed pipe system for service water / waste water	S	S	S
140 l insulated and heated fresh water tank in the double floor*	S	S	-
150 l insulated and heated fresh water tank in the double floor*	S	S	-
2 drainage valves for fresh water system	S	S	-
Drainage valves insulated and heated in the central service compartment	-	-	S
100 l waste water tank in insulated and heated floor trough	S	S	-
100 l insulated and heated waste water tank in the double floor	-	-	S
Electrically operated waste water tank emptying at the push of a button	S	S	S
Fittings with ceramic cartridges	S	S	S
Siphons to prevent odours	S	S	S

ELECTRICAL INSTALLATION

Electrical distributor panel easily accessible in the cover on the passenger seat	S	S	-
80 Ah gel battery	S	S	S
On-board control panel with separate displays for water, battery and charging voltage	S	S	S
LED reading spotlights with real glass	S	S	S
Light switch system with household logic system	S	S	S
LED ceiling light	S	S	-
Number of 230 V power sockets: 3	S	S	S
Number of 12 V power sockets: 1	S	S	S
21 A charger	S	S	S
LED ambient lighting, dimmable and programmable	-	-	S
LED function lights in the centre of the ceiling and in the lateral ceiling struts	-	-	S
USB charging ports in the living area and bedroom	S	S	S
TV preparation	S	S	S

A-Class – Special features

S = Standard feature**O** = Optional feature at extra charge**P** = Optional package feature**-** = Not possible

		INTEGRA LINE				ILGT		INTEGRA				Weight difference in kg	"RRP price (€) incl. 19% VAT"
		IL 720 EB	IL 720 EF	IL 720 QF	IL 730 EF	ILGT 726 EF	ILGT 726 QF	1760 EF	1760 QF	1890 EB	1890 QB		
PACKAGE - FITTINGS PACKAGES													
PSM07-26	Integra Line Mondial package	O	O	O	O	-	-	-	-	-	-	40	4,590
PSM08-26	Integra Line Mondial Plus package	O	O	O	O	-	-	-	-	-	-	98	9,900
PSM14-26	Integra Line GT Mondial Plus package	-	-	-	-	O	O	-	-	-	-	30	7,990
PLU49-26	Luminary package – 1760 2-axle	-	-	-	-	-	-	O	O	-	-	24	9,900
PLU50-26	Luminary package – 1760 3-axle	-	-	-	-	-	-	O	O	-	-	22	9,900
PLU51-26	Integra 890 Luminary package	-	-	-	-	-	-	-	-	O	O	27	9,900
PLU52-26	Luminary Plus package – 1760 2-axle	-	-	-	-	-	-	O	O	-	-	68	6,250
PLU53-26	1890 Luminary Plus package	-	-	-	-	-	-	-	-	O	O	72	6,250
PLU54-26	Luminary Plus package – 1760 3-axle	-	-	-	-	-	-	O	O	-	-	68	6,250
PSM21-26	Integra Line GT Mondial package	-	-	-	-	O	O	-	-	-	-	73	11,990
CHASSIS OPTION – ENGINE													
2112-26	180 HP Fiat engine (surcharge compared to 140 HP)	O	O	O	O	-	-	-	-	-	-	0	3,510
2116-26	180 HP Fiat engine	-	-	-	-	-	-	S	S	S	S		
2121-26	170 HP Mercedes-Benz engine	-	-	-	-	O	O	-	-	-	-	0	2,700
2123-26	150 HP Mercedes-Benz engine	-	-	-	-	S	S	-	-	-	-		
2160-26	140 HP Fiat engine	S	S	S	S	-	-	-	-	-	-		
CHASSIS OPTION – SUPERIMPOSED LOAD													
2324-26	Increase of tot. mass to 3.65t	O	O	O	O	-	-	-	-	-	-	0	460
2330-26	Red of tot. mass to 3.5 t	O	O	O	O	-	-	-	-	-	-	0	460
2358-26	Reinforced front axle springs	O	O	O	O	-	-	S	S	S	S	0	990
CHASSIS OPTION – OTHER OPTIONS													
2132-26	9G-Tronic automatic transmission Mercedes-Benz	-	-	-	-	S	S	-	-	-	-		
2133-26	Fiat automatic transmission in combination with a light chassis	O	O	O	O	-	-	-	-	-	-	60	3,690
2136-26	Fiat automatic transmission in combination with a Maxi chassis	O	O	O	O	-	-	S	S	S	S	20	3,690
2311-26	Maxi chassis 4.25t	O	O	O	O	-	-	-	-	-	-	40	1,990
2313-26	Maxi chassis 4.4t	O	O	O	O	-	-	-	-	-	-	40	1,990
2361-26	3-axle instead of 2-axle	-	-	-	-	-	-	O	O	-	-	150	6,990
2372-26	Fuel tank, 92 litre	-	-	-	-	O	O	-	-	-	-	22	620
2373-26	Fuel tank, 60 litre	S	S	S	S	-	-	-	-	-	-		
2374-26	90-litre fuel tank (Fiat 2 series)	O	O	O	O	-	-	S	S	S	S		
2550-26	LED upgrade for front lighting	-	-	-	-	O	O	-	-	-	-	0	1,990
2590-26	Heated windscreen	-	-	-	-	-	-	O	O	O	O	1	620
EXTERIOR DESIGN – PAINTWORK													
5451-26	Carbon external décor	-	-	-	-	-	-	S	S	S	S	2	1,190
SUPERSTRUCTURE OPTION – EXTERIOR													
2581-26	Superstructure door with central locking	O	O	O	O	O	O	S	S	S	S	2	520
5111-26	Rear comfort supports	O	O	O	O	O	O	O	O	O	O	8	690
5112-26	ALKO support system	-	-	-	-	-	-	O	O	O	O	72	7,990
5122-26	Trailer tow hitch	O	O	O	O	O	O	O	O	O	O	35	2,490
5412-26	Multi-function socket	O	O	O	O	O	O	O	O	O	O	2	390
5423-26	Underfloor camera for electrical tank emptying	-	-	-	-	-	-	O	O	O	O	1	1,230
5441-26	External shower (cold/warm)	O	O	O	O	O	O	O	O	O	O	1	350
5512-26	Window in toilet room	S	S	S	-	S	S	S	S	S	S	4	410
5534-26	Electric roof fan	O	O	O	O	O	O	S	S	S	S	6	350
5535-26	Tilting skylight roof hood (Heki)	O	O	O	O	O	O	S	S	S	S	23	1,420
5576-26	Mosquito screen for the body door	O	O	O	O	O	O	S	S	S	S	5	440
6656-26	Garage door service flap	S	S	S	S	-	-	S	S	S	S	4	690

A-Class – Special features

		INTEGRA LINE				ILGT		INTEGRA					
		IL 720 EB	IL 720 EF	IL 720 QF	IL 730 EF	ILGT 726 EF	ILGT 726 QF	I 760 EF	I 760 QF	I 890 EB	I 890 QB	Weight difference in kg	"RRP price (€) incl. 19% VAT"
SUPERSTRUCTURE OPTION – INTERIOR													
3541-26	Comfort seats	O	O	O	O	O	O	O	O	O	O	14	1,690
3611-26	Driver's cab floor insulating mat	O	O	O	O	O	O	O	O	O	O	2	250
3616-26	Insulating double glazing	O	O	O	O	O	O	O	O	O	O	12	1,270
3671-26	Carpet in the driver's cab	O	O	O	O	O	O	O	O	O	O	2	150
3680-26	Driver's cab dimming system	S	S	S	S	S	S	-	-	-	-	7	790
3883-26	Integra/Contura on QB, DB bedspread	-	-	-	-	-	-	-	O	-	O	2	550
3884-26	Integra/Contura on SB bedspread	-	-	-	-	-	-	O	-	O	-	2	550
3885-26	Bedspread on QB/DB	-	-	O	-	-	O	-	-	-	-	2	550
3886-26	EB bedspread	O	O	-	O	O	-	-	-	-	-	2	550
6213-26	Rear mattress removed	O	O	O	O	O	O	O	O	O	O	0	0
6224-26	Additional bed for 2 people (conversion of seating group)	O	O	O	O	O	O	O	O	O	O	11	770
6236-26	Electr. adjust. lift-up bed for 2 people	O	O	O	O	O	O	S	S	S	S	8	990
6237-26	Manually adjustable lift-up bed	S	S	S	S	S	S	-	-	-	-	39	990
6354-26	Seat: Fifth seat	O	-	-	-	-	-	-	-	O	O	13	990
6356-26	4th seat on driver's side	-	-	-	-	O	O	-	-	-	-	26	990
6357-26	Additional seat opposite the direction of travel	O	-	-	-	-	-	-	-	O	O	0	990
6430-26	Table with chrome-plated table base	-	-	-	-	-	-	S	S	S	S	2	420
6431-26	Storage cabinets instead of lift-up bed	O	O	O	O	-	-	O	O	O	O	-8	1,400
6657-26	Organisation system for the rear garage	-	-	-	-	-	-	O	O	O	O	4	690
7812-26	Ambient lighting	S	S	S	S	S	S	S	S	S	S	8	620
SUPERSTRUCTURE OPTION – BIKE CARRIER													
5143-26	Bicycle carrier for 2 bicycles or 2 E-bikes (up to 60kg)	-	-	-	-	-	-	O	O	O	O	9	650
5146-26	Bike carrier extension kit 4-way	O	O	O	O	O	O	O	O	O	O	2	170
5147-26	Bike carrier for 2 bikes	O	O	O	O	O	O	-	-	-	-	13	650
5148-26	Lowerable E-bike carrier	O	O	O	-	O	O	-	-	-	-	16	1,860
SUPERSTRUCTURE OPTION – CANOPIES													
5245-26	5 m canopy	O	O	O	O	-	-	-	-	-	-	42	2,090
5246-26	5.5 m canopy	-	-	-	-	O	O	O	O	-	-	63	2,300
5250-26	6 m canopy	-	-	-	-	-	-	-	-	O	O	67	2,520
SUPERSTRUCTURE OPTION – HEATING													
3617-26	Driver's cab underfloor heating (heated floor mat/Alde htg.)	O	O	O	O	O	O	O	O	O	O	4	1,190
7227-26	Hot water heating - Alde	S	S	S	S	S	S	S	S	S	S	15	2,700
7510-26	Autonomous E-bike charger	O	O	O	O	O	O	O	O	O	O	3	3,730
SUPERSTRUCTURE OPTION – KITCHEN													
7230-26	Extractor hood	O	O	O	O	O	O	S	S	S	S	3	580
7238-26	Oven	O	O	O	O	O	O	S	S	S	S	15	1,400
7255-26	Large refrigerator	S	S	S	S	S	S	S	S	S	S	18	1,400
SUPERSTRUCTURE OPTION – TECHNICAL SERVICES													
5221-26	Roof-mounted air-conditioning system, 230 V	O	O	O	O	O	O	O	O	O	O	35	3,290
5223-26	Roof-mounted aircon system 230 V (surch. comp. to Mondial)	O	O	O	O	O	O	-	-	-	-	35	3,290
7321-26	Lithium battery (1x)	O	O	O	O	O	O	O	O	O	O	-13	3,300




































Find a Eura Mobil
dealer near you here!



















S = Standard feature
O = Optional feature at extra charge
P = Optional package feature
- = Not possible

A-Class – Special features

[illegible]

SERIES AND LAYOUTS

 VANS	 ACTIVA ONE	 PROFILAT	 PROFILA RS	  PROFILAT MERCEDES	   PROFILAT FREESTYLE
 V 595 HB 5.95 m	 A ONE 570 HS 5.99 m				
 V 635 EB 6.35 m	 A ONE 630 LS 6.44 m	 PT 660 EB 6.99 m	 PRS 675 SB 6.99 m		
 V 635 HB 6.35 m	 A ONE 650 HS 6.50 m	 PT 675 SB 6.99 m	 PRS 695 EB 6.99 m		
		 PT 695 EB 6.99 m	 PRS 695 HB 6.99 m		
		 PT 720 EB 7.41 m	 PRS 720 EB 7.41 m	 PT 696 EB 7.12 m	
		 PT 720 EF 7.41 m	 PRS 720 EF 7.41 m	 PT 726 EB 7.54 m	
		 PT 720 QF 7.57 m	 PRS 720 QF 7.57 m	 PT 726 EF 7.44 m	  PT 726 EF FREE 7.44 m
				 PT 726 QF 7.61 m	  PT 726 QF FREE 7.61 m

 CONTURA		 XTURA		 INTEGRA LINE		 INTEGRA LINE GT		 INTEGRA		
										6 m
		 XT 686 EF 6.88 m								7 m
 C 766 EB 7.84 m				 IL 720 EB 7.41 m		 IL GT 726 EF 7.47 m		 I 760 EF 7.89 m		8 m
 C 766 EF 7.84 m				 IL 720 EF 7.41 m		 IL GT 726 QF 7.65 m		 I 760 QF 7.89 m		
				 IL 720 QF 7.57 m						
				 IL 730 EF 7.57 m						
								 I 890 EB 8.99 m		9 m
								 I 890 QB 8.99 m		

The advantages at a glance.



Set your own standard and compare for yourself!

Standard in Eura Mobil motorhomes with bodywork:

+ Bonded and all-round-sealed body composite made of hail-protected glass-fibre reinforced plastic (GRP) featuring Eura Mobil Sealed Structure Technology
Material composite from aeronautical engineering: high torsional stiffness, best bonding strength (3.5t on 1m profile length), seamless sealing against moisture penetration, the hail-protected surface material enables lower third-party, fire and theft premiums with many insurance companies than is the case with comparable vehicles with aluminium sheeting.

+ Heated and insulated double floor
Frost-protected "basement", all technical installations are installed protected in the double floor instead of inside the vehicle or on the underbody.

+ Additional storage compartments in the double floor with access from the interior
Double floor offers additional storage possibilities for exterior storage compartments or floor compartments accessible from the inside.

- + Winter-proof according to EN 1646-2**
Rapid heating of the vehicle interior and guarantee of full functionality of the water system even in severe frost (test cycle with -15 degrees outside temperature).
- + Wood-free GRP walls with continuous insulation**
Rot-proof even in case of moisture penetration, easy to repair, efficient insulation without cold bridges in the wall.
- + Robust furniture (3-year guarantee)**
Torsion-resistant furniture with long service life and low noise development during travel.
- + Wall units with sturdy metal uprights and noise damping**
Durable, quietly closing wall unit flaps.
- + Lightweight GRP floor panel**
Weight reduction for more payload and floor panel resistant to moisture, road salt, dirt and operating materials.
- + 10-year leak-proof guarantee on the body (up to 150,000km)**
Eura Mobil stands for high reliability and thus guarantees you a high degree of safety and risk protection against possible bodywork defects.
- + Water tanks protected in the insulated and heated raised floor**
Water tanks are well protected against mechanical damage as well as possible frost-related functional restrictions.
- + Underfloor heating effect in the floor you walk on**
Pleasant floor temperature – you can walk barefoot even in winter!
- + Beds with slatted frame**
Well-ventilated beds with comfortable mattresses for a relaxed night's sleep.
- + Wide body door with window**
Easier access, more brightness, view of visitors outside the door.
- + Insulated frame window flush with the outer wall featuring a mosquito screen**
Harmonious integration into the vehicle design, efficient insulation.
- + Robust aluminium body sills**
Sturdy scuff plate against light collision damage.
- + 2 quick-acting drain valves for fresh water in the heated and insulated double floor**
Convenient water tank emptying from the inside.
- + Electrically operated drain valve for waste water or manual drain cock (for coachbuilt models) in the heated area**
Simple and clean emptying of the waste water tank.
- + Mini-Heki skylights**
Easy to open, durable skylights with multiple ventilation positions.
- + Minimum 140-litre fresh water tank capacity**
Large fresh water capacity for more self-sufficiency from the external water supply.
- + Pressurised water system**
Delay-free response of the water system, water pressure like at home.

Your Quality Time.



All of the information in this brochure relates to the products listed herein and does not apply to any other products of Eura Mobil GmbH.

The models illustrated in this brochure show the features available in Germany. They may also contain special features and accessories that are not included with the standard scope of delivery.

Due to legal regulations, it is possible that the model variations and equipment features described here might be different in certain countries. Please ask your Eura Mobil dealer about the exact scope and available range of model-specific and model-neutral features. Subject to errors and changes in design, equipment and special features.

We work constantly to improve the quality of our vehicles, which is why we reserve the right to make changes to their features / optional features in this model year as well. The latest current features, optional features and package contents can therefore only be viewed in the online configurator at www.euramobil.de.

With regard to installations and conversions, please note / comply with the manufacturer specifications and the legal provisions as defined in the German Road Traffic Licensing Regulations (StVZO) and the German Road Traffic Regulations (StVo).

The publication of this brochure renders all previous catalogues invalid.

© Eura Mobil GmbH 2025

Reprints, including excerpts thereof, are only permitted with the written consent of Eura Mobil GmbH.

E-PEM-2026-GB01 Technical Specifications EM 2025/2026GB

Last updated: August 2025

Eura Mobil GmbH - Kreuznacher Strasse 78 55576 Sprendlingen (Rheinhessen)

Tel. +49 6701 / 203 200 - Fax +49 6701 / 203 210 - info@euramobil.de - www.euramobil.de

**Find a Eura Mobil
dealer near you here!**